


CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITOR

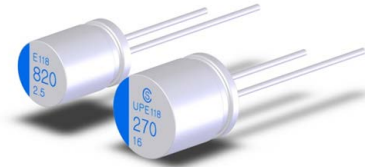

Application Guidelines

1. Polarity

CS-CAP is solid aluminum electrolytic capacitors with positive and negative electrodes. Do not reverse the polarity when using. If it is used with the polarities reversed, its life may shorten because of increasing leakage current or short circuit.

2. Prohibited circuits

Since problems can be expected due to leakage current increasing during soldering and other processes, CS-CAP cannot be used in the following circuits:

- (1) High impedance circuits
- (2) Coupling circuits
- (3) Time constant circuits
- (4) Connection of two or more capacitors in series for higher withstand voltage
- (5) Circuits to get bad influence by big leakage current

* In addition to the leakage current fluctuation above, the operational conditions such as characteristics at high and low temperature, damp heat and endurance stipulated in the specifications will affect the capacitance. The fluctuation of the capacitance may cause problem if it is used as a time constant capacitor, which is extremely sensitive to the fluctuation of the capacitance. Do not use it as a time constant capacitor. Additionally, please contact Taiwan Chinsan Electronic Industrial Co., Ltd. for usage of two or more CS-CAP in series for voltage proof.

3. Over voltage

Over voltage exceeding the rated voltage may not be applied even for an instant as it may cause a short circuit.

4. Sudden charge and discharge

Sudden charge and discharge restricted (for maintenance of high-proof reliability). A protection circuit is recommended for when a sudden charge or discharge causes excessive rush current because this is a main cause of short circuits and large leakage current. Use protection circuits if the rush current exceeds 10A. The rush current exceeds 10×the maximum allowable ripple current of CS-CAP. Be sure to insert a protection resistor of about 1kΩ for charge and discharge when measuring the leakage current.

5. Soldering

The soldering conditions are to be within the range prescribed in the specifications. If the specifications are not followed, there is the possibility of the appearance becoming defective and of increase of abnormal leakage current and capacity reduction when soldering is conducted under conditions that are harsher than those stipulated.

Sufficient PCB installation space (PCB means Printed Circuit Board after this.) Sealing resin of CS-CAP may have a bulge. The design must give consideration to the standard of height and lead position displacement given in the specifications.

6. Use of CS-CAP for industrial equipments

To ensure reliability when the CS-CAP is used in industrial equipments, design must allow for its capacitance, impedance and other characteristics.

7. Use of CS-CAP for human life equipments

In case of using in equipments regarding human life (e.g. Space equipment, aeronautic equipment and atomic equipment etc.), be sure to talk over the matter with Taiwan Chinsan Electronic Industrial Co., Ltd. Don't use without recognition document of Taiwan Chinsan Electronic Industrial Co., Ltd.

8. Storage

- (1) Store CS-CAP with the temperature range between 15 to 35°C and the relative humidity of 75% or less without direct sunshine and store CS-CAP in the package states if possible.
- (2) CS-CAP are recommended that you shall open the bag just before use and CS-CAP shall be used up.
- (3) Never store CS-CAP in which it is directly exposed to water, brine, oil or in condensation status.
- (4) Never store CS-CAP in any area filled with poisonous gases(including hydrogen sulfide, sulfurous acid, nitrous acid, chlorine and ammonia).
- (5) Never store CS-CAP in any area to which ultraviolet and/or radial rays are radiated.

9. Cleaning

Concerning about HCFC, higher alcohol system, petroleum system, terrene system, water system with surface active agent and other solvents the washing way (separateness or combinations) by soak, ultrasonic wave, boil, vapor etc. is confirmed under the maker's recommendation. Please contact us if you require further details.

10. Notes on circuit designs for CS-CAP

10.1 Performance

Use CS-CAP within the rating and performance ranges defined in this specifications.

10.2 Operating temperature and ripple current

If CS-CAP is used at a temperature higher than the upper category temperature, or excess ripple current flows through CS-CAP, there are high possibilities of life cycle reduction or leakage current increasing to cause CS-CAP defective.

10.3 Leakage current

The leakage current of CS-CAP may increase slightly by soldering conditions. The application of DC voltage enables the capacitors to be repaired by itself and this leads the leakage current to be smaller gradually.

10.4 Applied voltage

For the reliability of CS-CAP, it is recommended that the voltage applied to the peak value of the ripple voltage should be less than the rated voltage.

10.5 Failure mode

CS-CAP contains a conductive polymer. The life ends mostly due to random failure mode, mainly short circuit. In case of short circuit, CS-CAP can be overheated by continuous current flow, the case of CS-CAP would be removed by internal pressure increasing.

10.6 Insulation

Plastic coated case of CS-CAP can't guarantee the insulation. Do not use CS-CAP in areas requiring insulation.


11. Soldering condition for CS-CAP

11.1 Wave soldering condition for DIP type

	Temperature	Time
Preheating	125°C Max	Within 120 sec
Soldering condition	260±5°C Max	Within 10 sec

11.2 Reflow soldering condition for SMD type

Preheat	>217°C	>230°C	Peak Temp	Reflow times
150°C~180°C	50sec Max	40s Max	260°C MAX	1 cycle only
120Sec Max			250°C MAX	2 cycle allowed

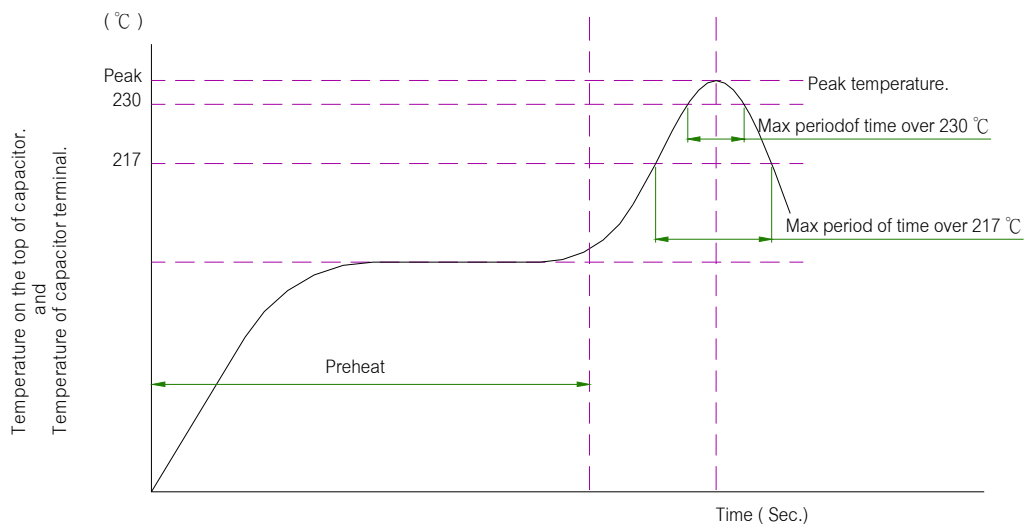

Capacitor Series Table

Series		Page	Features	Voltage Range (Vdc)	Capacitance Range (μF)	Operating Temperature Range (°C)	Endurance (Hours)
DIP	UPS	9	Super Low ESR 7 mΩ and Large Capacitance	2.5 to 16	150 to 2,000	-55 to 105°C	2,000
	UPR	11	Super Low ESR 8 mΩ and Small size	2.5 to 16	100 to 820	-55 to 105°C	2,000
	UL	13	Small size, Low profile and Low ESR	2.5 to 16	100 to 680	-55 to 105°C	2,000
	UPE	15	Super Low ESR Endurance 105°C 5,000 hours	2.5 to 35	22 to 1,000	-55 to 105°C	5,000
	RP	17	ESR 12 mΩ	2.5 to 16	100 to 2,700	-55 to 105°C	2,000
	RH	19	Higher heat resistance 125°C High reliability	2.5 to 25	82 to 1,200	-55 to 125°C	2,000
	GP	21	Low ESR and High voltage	10 to 25	47 to 1,000	-55 to 105°C	2,000
	GV	23	High reliability and High voltage	25 to 100	18 to 470	-55 to 105°C	2,000
	GS	25	Low ESR and Large Capacitance	16 to 25	470 to 2,700	-55 to 105°C	2,000
SMD	SG	27	Low ESR and High voltage	2.5 to 63	22 to 2,700	-55 to 105°C	2,000
	SP	29	Super Low ESR	2.5 to 25	47 to 2,700	-55 to 105°C	2,000
	SU	31	Ultra Low ESR	2.5 to 6.3	330 to 390	-55 to 105°C	2,000
	SE	33	Low ESR, Long Life 5,000 hours	2.5 to 35	47 to 560	-55 to 105°C	5,000


CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



◆ MARKING AND DATE CODE

Trade mark(Chinsan) Series Code Negative Polarity Rated Capacitance Rated Voltage CS UPE118 270 16 E118 820 2.5 CS UPE118 270 16 CS UPE118 270 16		E118 820 2.5 CS UPE118 270 16																																																	
Trade Mark "CS"	Chinsan Solid Capacitor, Show on Dimension ≥ 8φ																																																		
Code (Date Code) (1) (2) (3) 1 5 8	(1)DAY <table><tr><td>Code</td><td>1</td><td>2</td><td>3</td></tr><tr><td>Day</td><td>1st~10th</td><td>11~20th</td><td>21st~31st</td></tr></table> (2)Month <table><tr><td>Code</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td></tr><tr><td>Month</td><td>Jan</td><td>Feb</td><td>Mar</td><td>Apr</td><td>May</td><td>Jun</td></tr><tr><td>Code</td><td>7</td><td>8</td><td>9</td><td>X</td><td>Y</td><td>Z</td></tr><tr><td>Month</td><td>July</td><td>Aug</td><td>Sep</td><td>Oct</td><td>Nov</td><td>Dec</td></tr></table> (3)Year <table><tr><td>Code</td><td>6</td><td>7</td><td>8</td><td>9</td><td>0</td><td>1</td></tr><tr><td>Year</td><td>2016</td><td>2017</td><td>2018</td><td>2019</td><td>2020</td><td>2021</td></tr></table>	Code	1	2	3	Day	1st~10th	11~20th	21st~31st	Code	1	2	3	4	5	6	Month	Jan	Feb	Mar	Apr	May	Jun	Code	7	8	9	X	Y	Z	Month	July	Aug	Sep	Oct	Nov	Dec	Code	6	7	8	9	0	1	Year	2016	2017	2018	2019	2020	2021
Code	1	2	3																																																
Day	1st~10th	11~20th	21st~31st																																																
Code	1	2	3	4	5	6																																													
Month	Jan	Feb	Mar	Apr	May	Jun																																													
Code	7	8	9	X	Y	Z																																													
Month	July	Aug	Sep	Oct	Nov	Dec																																													
Code	6	7	8	9	0	1																																													
Year	2016	2017	2018	2019	2020	2021																																													
Series (Print Code)	<table><tr><td>Series</td><td>UPS</td><td>UPR</td><td>UL</td><td>UPE</td><td>RP</td><td>RH</td><td>GP</td><td>GV</td><td>GS</td><td>SG</td><td>SP</td><td>SU</td><td>SE</td></tr><tr><td>Ø5~ Ø6.3</td><td>--</td><td>R</td><td>L</td><td>E</td><td>--</td><td>H</td><td>P</td><td>V</td><td>--</td><td>G</td><td>P</td><td>U</td><td>E</td></tr><tr><td>Ø8~ Ø10</td><td>UPS</td><td>--</td><td>UL</td><td>UPE</td><td>RP</td><td>RH</td><td>GP</td><td>GV</td><td>GS</td><td>SG</td><td>SP</td><td>SU</td><td>SE</td></tr></table>	Series	UPS	UPR	UL	UPE	RP	RH	GP	GV	GS	SG	SP	SU	SE	Ø5~ Ø6.3	--	R	L	E	--	H	P	V	--	G	P	U	E	Ø8~ Ø10	UPS	--	UL	UPE	RP	RH	GP	GV	GS	SG	SP	SU	SE								
Series	UPS	UPR	UL	UPE	RP	RH	GP	GV	GS	SG	SP	SU	SE																																						
Ø5~ Ø6.3	--	R	L	E	--	H	P	V	--	G	P	U	E																																						
Ø8~ Ø10	UPS	--	UL	UPE	RP	RH	GP	GV	GS	SG	SP	SU	SE																																						

◆ LEAD FORMING TYPE

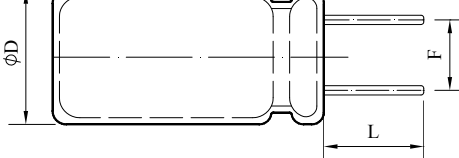Type	Part Number	Dimensions (Unit: mm)															
		ΦD	F	t	L (Part number for lead length and pitch for taping)												
					3	4	U	7	D	X	R	B	E	G	2	M	T
					3.5	4.5	5.5	7	4	2.3	2.5	2.8	3.1	3.3	2.5	3.5	3.8
					±0.5					±0.2					±0.3		
Cut	C	5	2	----													
		6.3	2.5	----													
		8	3.5	----													
		10	5	----													

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



◆ TAPING

Figure 1	Symbol	Tolerance	Φ 5		Φ 6.3		Φ 8	
			PS	P5	PS	P5	PS	P5
	Φd	±0.05	0.45		0.45/0.6		0.6	
	P	±0.1	12.7		12.7		12.7	
	P0	±0.2	12.7		12.7		12.7	
	P1	±0.5	3.85		3.85		3.85	
	P2	±1.0	6.35		6.35		6.35	
	F	+0.8	5		5		5	
		-0.2						
	H	±0.5	17.5	18.5	17.5	18.5	17.5	18.5
	H0	±0.5	16		16		16	
	W	±0.5	18		18		18	
	W0	Minimum	12.5		12.5		12.5	
	D0	±0.2	4		4		4	
	t	±0.2	0.7		0.7		0.7	

Figure 2	Symbol	Tolerance	Φ 6.3	Φ 8			Φ 10
			P2	P3	H3	P7	P5
	Φd	±0.05	0.45/0.6	0.6			0.6
	P	±0.1	12.7	12.7			12.7
	P0	±0.2	12.7	12.7			12.7
	P1	±0.5	5.6	4.6			4.6
	P2	±1.0	6.35	6.35			6.35
	F	+0.8	2.5	3.5			5
		-0.2					
	H	±0.5	18.5	18.5	20	17.5	18.5
	H0	±0.5	-	-			-
	W	±0.5	18	18			18
	W0	Minimum	12.5	12.5			12.5
	D0	±0.2	4	4			4
	t	±0.2	0.7	0.7			0.7

Figure 3	Symbol	Tolerance	Φ 5
			PZ
	Φd	±0.05	0.45
	P	±0.1	12.7
	P0	±0.2	12.7
	P1	±0.5	5.6
	P2	±1.0	6.35
	F	+0.8	2.0
		-0.2	
	H	±0.5	18.5
	H0	±0.5	-
	W	±0.5	18
	W0	Minimum	12.5
	D0	±0.2	4
	t	±0.2	0.7

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



PART NUMBER SYSTEM

◆ RADIAL LEAD TYPE

Series	Rated Voltage	Capacitance	Tolerance	Lead Forming Type	Lead Length	Case Dimension	Special Request
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
☐ ☐ ☐	☐ ☐	☐ ☐ ☐	☐	☐	☐	☐ ☐ ☐ ☐	☐ ☐ ☐ ☐ ☐

(1) Series

Series	DIP	UPS	UPR	UL	UPE	RP	RH	GP	GV	GS
	SMD	SG	SP	SU	SE					

(2) Rated Voltage

Code	0E	0J	6K	7H	1A	1B	AG	1C	1D	1P	1E	1F	1V	1H	1J	2A
WV	2.5	6.3	6.8	7.5	10	12	14	16	20	22	25	30	35	50	63	100

(3) Capacitance

Code	100	180	560	101	181	561	102	182
μF	10	18	56	100	180	560	1000	1800

(4) Capacitance Tolerance

Code	J	Q	R	K	V	M	H
%	± 5	+30 / -10	+20 / -0	± 10	+20 / -10	± 20	+20 / -5

(5) Lead Type

Code	C	P
Description	Cutting	Taping
Drawing	Page6	Page7

(6) Lead Length (Cut / Formed lead)

Code	3	4	U	7	D	X	R	B	E	G	2	M	T	N
Length	3.5	4.5	5.5	7	4	2.3	2.5	2.8	3.1	3.3	2.5	3.5	3.8	+20mm min
Tolerance	±0.5					±0.2					±0.3			-15mm min

Taping Code

Code	Z	2	3	7	5	S
Lead Pitch: +0.8/-0.2	2.0	2.5	3.5	3.5	5.0	5.0

(7) Case Dimension

DIP Code	0508	6305	6308	6311	0807	0808	0811	0816	0820	1012	1016	1020
Size	5×8	6.3×5	6.3×8	6.3×11	8×7	8×8	8×11	8×16	8×20	10×12	10×16	10×20
SMD Code	5057	6343	6357	8067	8077	8097	8117	8122	1077	1124		
Size	5×5.7	6.3×4.3	6.3×5.7	8×6.7	8×7.7	8×9.7	8×11.7	8×12.2	10×7.7	10×12.4		

(8) Special Request

Code	R	F	L	D
Description	High Rated ripple current	Endurance	Low Leakage Current	Low Dissipation Factor
Code	U	E	P	---
Description	Convex Rubber	Low ESR	PET Sleeve	---

UPS Series

- Super low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 16Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table.(Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS (mm)

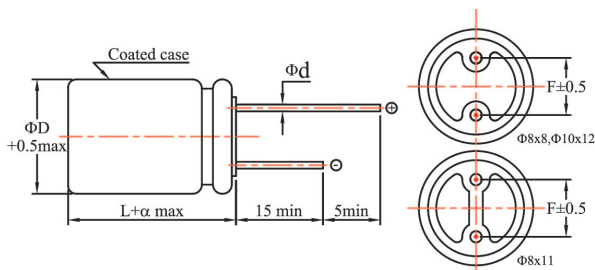


Lead

ΦD	8	8	10
Φd	0.6	0.6	0.6
L	8	11	12
α	1.0	1.5	1.5
F	3.5	3.5	5.0

Marking



PART NUMBER SYSTEM

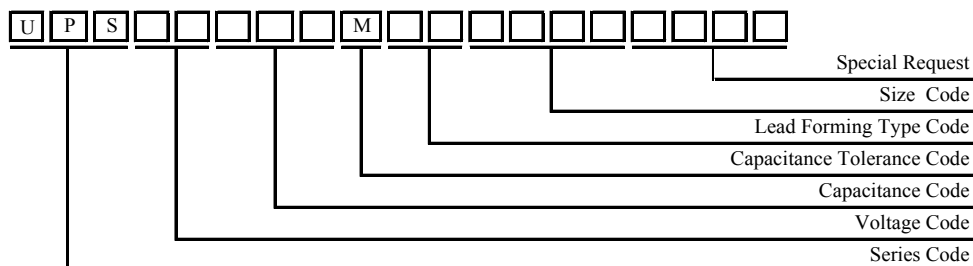

UPS Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩmax)	Rated Ripple Current 105℃,100KHz (mA _{rms} max)	Tanδ max	Leakage Current (μA max)	Part Number
2.5(0E)	560	8×8	7	4700	0.12	350	UPS0E561MNN0808U
	680	8×8	7	5580	0.12	425	UPS0E681MNN0808U
	820	8×8	7	6100	0.12	512	UPS0E821MNN0808U
	820	8×11	7	6100	0.12	410	UPS0E821MNN0811U
	1000	8×8	7	6100	0.12	500	UPS0E102MNN0808U
	1000	8×11	7	6100	0.12	500	UPS0E102MNN0811U
	1200	8×8	7	6100	0.12	600	UPS0E122MNN0808U
	1500	8×11	7	6100	0.12	750	UPS0E152MNN0811U
	1500	10×12	7	6100	0.12	750	UPS0E152MNN1012U
	1800	8×11	7	6100	0.12	900	UPS0E182MNN0811U
4(0G)	470	8×8	7	5600	0.12	470	UPS0G471MNN0808U
	560	8×8	7	6100	0.12	560	UPS0G561MNN0808U
	680	8×8	7	6100	0.12	544	UPS0G681MNN0808U
	820	10×12	7	6100	0.12	656	UPS0G821MNN1012U
	1200	10×12	7	6100	0.12	960	UPS0G122MNN1012U
6.3(0J)	220	8×8	7	3700	0.12	347	UPS0J221MNN0808U
	330	8×8	7	3700	0.12	520	UPS0J331MNN0808U
	390	8×8	7	5700	0.12	491	UPS0J391MNN0808U
	470	8×8	7	5700	0.12	740	UPS0J471MNN0808U
	560	8×8	7	5700	0.12	882	UPS0J561MNN0808U
	680	8×8	7	5860	0.12	857	UPS0J681MNN0808U
	820	8×11	7	6100	0.12	1033	UPS0J821MNN0811U
	820	10×12	7	6100	0.12	1033	UPS0J821MNN1012U
	1000	10×12	7	6100	0.12	1260	UPS0J102MNN1012U
	1500	10×12	7	6100	0.12	1890	UPS0J152MNN1012U
	2000	10×12	7	7100	0.12	2520	UPS0J202MNN1012U
10(1A)	270	8×11	7	5600	0.12	540	UPS1A271MNN0811U
	470	10×12	7	6100	0.12	940	UPS1A471MNN1012U
	560	8×11	7	5700	0.12	882	UPS1A561MNN0811U
	560	10×12	7	6100	0.12	1120	UPS1A561MNN1012U
	680	8×11	7	5600	0.12	1360	UPS1A681MNN0811U
	820	8×11	7	5700	0.12	1640	UPS1A821MNN0811U
	820	10×12	7	6100	0.12	1640	UPS1A821MNN1012U
	1000	10×12	7	6100	0.12	2000	UPS1A102MNN1012U
16(1C)	150	8×11	7	5600	0.12	480	UPS1C151MNN0811U
	180	8×8	7	5600	0.12	576	UPS1C181MNN0808U
	180	8×11	7	5600	0.12	576	UPS1C181MNN0811U
	270	8×11	7	5600	0.12	864	UPS1C271MNN0811U
	330	8×11	7	5600	0.12	1056	UPS1C331MNN0811U
	330	10×12	7	6100	0.12	1056	UPS1C331MNN1012U
	470	8×11	7	5600	0.12	1504	UPS1C471MNN0811U
	470	10×12	7	6100	0.12	1504	UPS1C471MNN1012U
	820	10×12	7	6100	0.12	2000	UPS1C821MNN1012U

UPR Series

- Super low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 16Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS (mm)

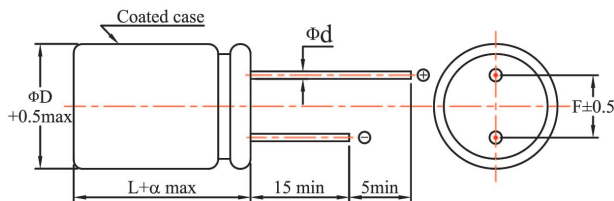


Lead

ΦD	5	10
Φd	0.45	0.6
L	8	8
α	1	1
F	2	2.5

Marking



PART NUMBER SYSTEM

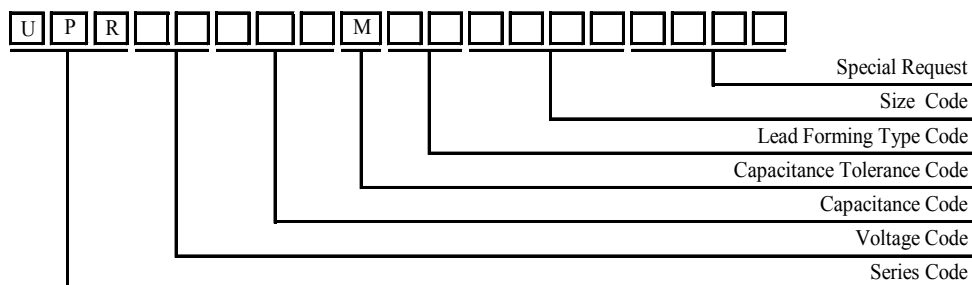

UPR Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩmax)	Rated Ripple Current 105°C, 100KHz (mA _{rms} max)	Tanδ max	Leakage Current (μA max)	Part Number
2.5(0E)	220	5×8	8	4340	0.10	500	UPR0E221MNN0508
	330	5×8	8	4340	0.10	500	UPR0E331MNN0508
	560	5×8	8	4340	0.10	500	UPR0E561MNN0508
	560	6.3×8	8	4700	0.10	500	UPR0E561MNN6308
	680	6.3×8	8	4900	0.10	500	UPR0E681MNN6308
	820	6.3×8	8	5000	0.10	513	UPR0E821MNN6308
	820	6.3×8	5	5900	0.10	513	UPR0E821MNN6308E
4(0G)	560	6.3×8	8	4700	0.10	560	UPR0G561MNN6308
6.3(0J)	220	5×8	11	3200	0.10	300	UPR0J221MNN0508
	220	6.3×8	9	3900	0.10	500	UPR0J221MNN6308
	270	5×8	8	4050	0.10	500	UPR0J271MNN0508
	330	5×8	8	4050	0.10	500	UPR0J331MNN0508
	330	6.3×8	8	4700	0.10	500	UPR0J331MNN6308
	390	6.3×8	8	4700	0.10	530	UPR0J391MNN6308
	470	6.3×8	8	4700	0.10	592	UPR0J471MNN6308
	560	5×8	7	4180	0.10	500	UPR0J561MNN0508
	560	6.3×8	8	4700	0.10	706	UPR0J561MNN6308
	680	6.3×8	8	4700	0.10	856	UPR0J681MNN6308
	820	6.3×8	8	4700	0.10	1033	UPR0J821MNN6308
10(1A)	100	5×8	35	2200	0.10	300	UPR1A101MNN0508
	150	6.3×8	24	2820	0.10	480	UPR1A151MNN6308
	220	6.3×8	8	4700	0.10	550	UPR1A221MNN6308
	270	6.3×8	8	4700	0.10	540	UPR1A271MNN6308
	330	6.3×8	8	4700	0.10	660	UPR1A331MNN6308
16(1C)	100	6.3×8	10	4680	0.10	320	UPR1C101MNN6308
	270	6.3×8	10	5080	0.10	864	UPR1C271MNN6308

UL Series

- Super low ESR at a high frequency range
- Low profile 6.3x6 max, 8x7 max
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 16Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS (mm)

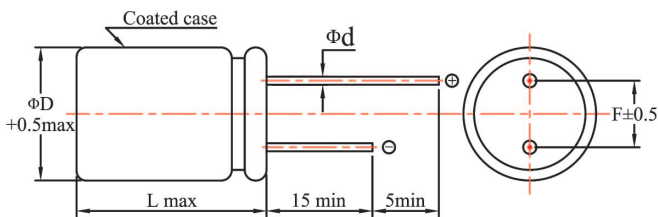


Lead

ΦD	6.3	8
Φd	0.45	0.6
	6	7
F	2.5	3.5

Marking



PART NUMBER SYSTEM

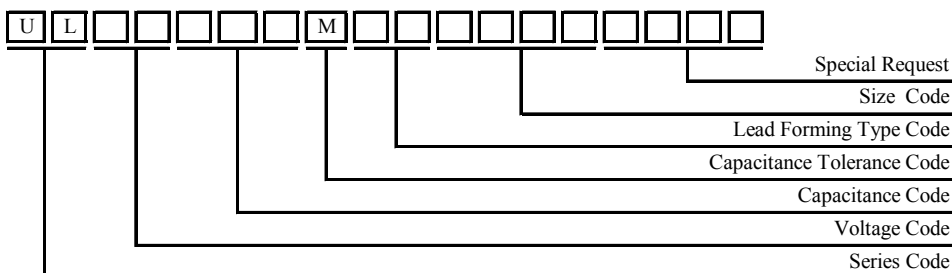

UL Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃,100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	220	6.3×6	8	3400	0.10	500	UL0E221MNN6306
	390	6.3×6	8	3900	0.10	500	UL0E391MNN6306
	560	6.3×6	8	3900	0.10	500	UL0E561MNN6306
	680	6.3×6	8	4500	0.10	500	UL0E681MNN6306
6.3(0J)	220	6.3×6	17	3000	0.10	500	UL0J221MNN6306
	330	6.3×6	17	3300	0.10	500	UL0J331MNN6306
16(1C)	100	6.3×6	24	2490	0.10	500	UL1C101MNN6306
	150	6.3×6	22	3220	0.10	500	UL1C151MNN6306
	180	6.3×6	22	3300	0.10	576	UL1C181MNN6306
	220	8×7	13	4150	0.10	704	UL1C221MNN0807
	270	8×7	12	4300	0.10	864	UL1C271MNN0807
	330	8×7	12	4300	0.10	1056	UL1C331MNN0807
	390	8×7	12	4300	0.10	1248	UL1C391MNN0807
	470	8×7	13	4700	0.10	1504	UL1C471MNN0807

UPE Series

- Super low ESR at a high frequency range
- High ripple current capability
- 5,000 hours at 105°C




◆ SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105℃								
Working Voltage Range	2.5 ~ 35Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25℃ and 120Hz)								
ESR	See the standard ratings table (at 25℃, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25℃, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105℃ <table border="1"> <tbody> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </tbody> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 60℃ 90 to 95% RH <table border="1"> <tbody> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </tbody> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


◆DIMENSIONS (mm)

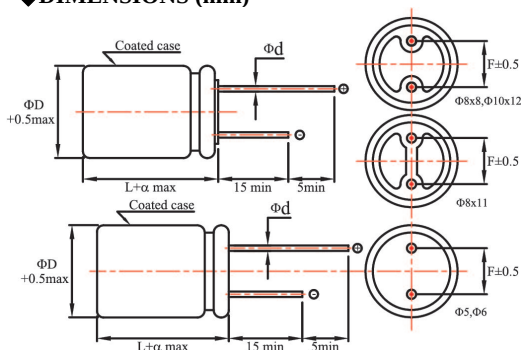


◆Lead

ΦD	5	6.3	6.3	8	8	10
Φd	0.45			0.6		
L	8	5	8	6~8	11	12
α	1	1	1	1	1.5	1.5
F	2.0	2.5		3.5		5

◆Marking



◆ PART NUMBER SYSTEM

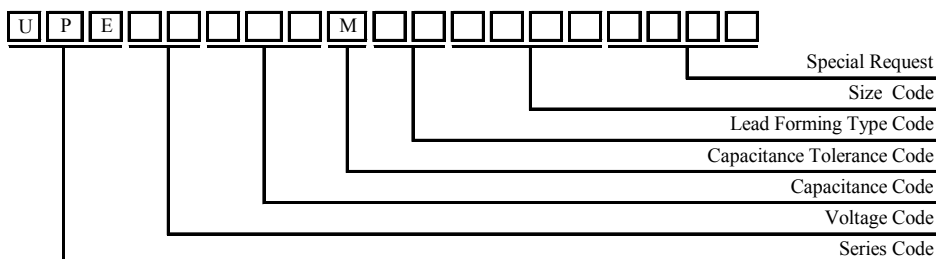

UPE Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃,100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	390	6.3×5	10	3900	0.10	500	UPE0E391MNN6305
	560	5×8	7	4200	0.10	500	UPE0E561MNN0508
	560	6.3×8	7	5000	0.10	500	UPE0E561MNN6308
	560	8×8	8	4700	0.10	500	UPE0E561MNN0808
	820	6.3×8	7	5000	0.10	500	UPE0E821MNN6308
	820	8×8	7	6100	0.10	500	UPE0E821MNN0808
	1000	8×8	7	6100	0.10	900	UPE0E102MNN0808
4(0G)	560	6.3×8	7	5000	0.10	500	UPE0G561MNN6308
	560	8×8	7	6100	0.10	500	UPE0G561MNN0808
6.3(0J)	100	6.3×8	35	2100	0.10	500	UPE0J101MNN6308
	330	5×8	8	4050	0.10	500	UPE0J331MNN0508
	470	6.3×8	8	4700	0.10	592	UPE0J471MNN6308
	560	8×8	7	6100	0.10	706	UPE0J561MNN0808
	820	6.3×8	8	4700	0.10	1033	UPE0J821MNN6308
	820	8×8	8	6100	0.10	1033	UPE0J821MNN0808
16(1C)	100	6.3×5	24	2400	0.10	500	UPE1C101MNN6305
	100	6.3×8	24	2490	0.10	500	UPE1C101MNN6308
	180	6.3×5	22	3300	0.10	576	UPE1C181MNN6305
	180	8×8	10	5000	0.10	576	UPE1C181MNN0808
	180	8×11	16	4360	0.10	576	UPE1C181MNN0811
	220	8×6	13	4150	0.10	500	UPE1C221MNN0806
	270	6.3×8	15	3800	0.10	864	UPE1C271MNN6308
	270	8×8	10	5000	0.10	864	UPE1C271MNN0808
	270	8×11	11	5000	0.10	864	UPE1C271MNN0811
	330	8×8	11	4700	0.10	1056	UPE1C331MNN0808
	470	8×8	16	4000	0.10	1504	UPE1C471MNN0808
	470	8×11	11	5400	0.10	1504	UPE1C471MNN0811
	470	10×12	10	6100	0.10	1504	UPE1C471MNN1012
	560	8×11	14	4970	0.10	1792	UPE1C561MNN0811
	820	10×12	12	5400	0.10	2624	UPE1C821MNN1012
	1000	10×12	12	5400	0.10	3200	UPE1C102MNN1012
25(1E)	56	6.3×5	30	2800	0.10	300	UPE1E560MNN6305
	82	8×8	28	3000	0.10	410	UPE1E820MNN0808
	180	8×11	16	4650	0.10	900	UPE1E181MNN0811
	330	10×12	14	5000	0.10	1650	UPE1E331MNN1012
35(1V)	22	6.3×5	35	2600	0.10	300	UPE1V220MNN6305
	33	8×8	30	2800	0.10	300	UPE1V330MNN0808
	82	8×11	20	4000	0.10	574	UPE1V820MNN0811
	120	10×12	18	4400	0.10	840	UPE1V121MNN1012

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



RP Series

- Low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 16Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C
 ※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS (mm)

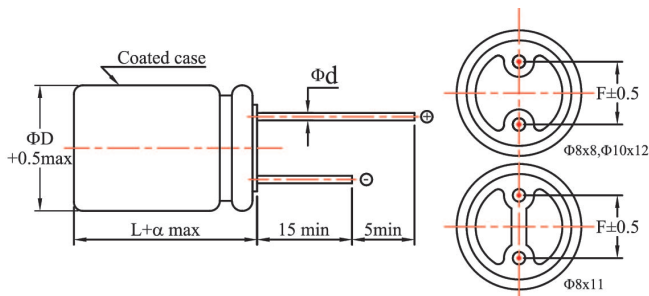


Lead

ΦD	8	8	10
Φd	0.6	0.6	0.6
L	8	11	12
α	1	1.5	1.5
F	3.5	3.5	5

Marking



PART NUMBER SYSTEM

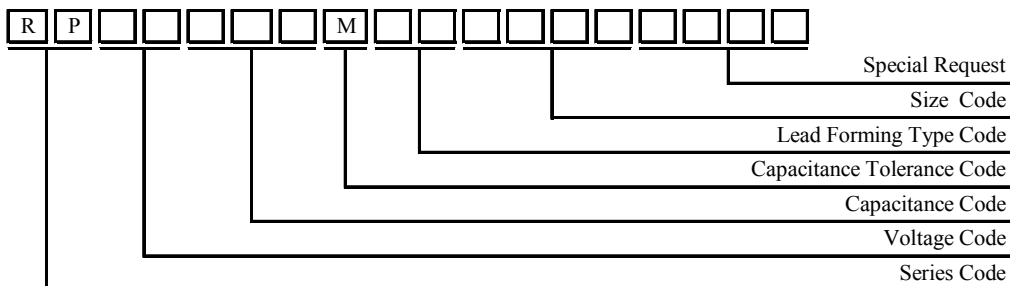

RP Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃,100KHz (mA _{rms} max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	680	8×11	12	4520	0.12	340	RP0E681MNN0811
	820	8×11	12	5440	0.12	410	RP0E821MNN0811
	1500	10×12	12	5440	0.12	750	RP0E152MNN1012
	2700	10×12	12	5440	0.12	1350	RP0E272MNN1012
4(0G)	560	8×11	12	4520	0.12	448	RP0G561MNN0811
	820	10×12	12	5040	0.12	656	RP0G821MNN1012
	1200	10×12	12	5040	0.12	960	RP0G122MNN1012
6.3(0J)	270	8×8	12	3600	0.12	340	RP0J271MNN0808
	470	8×8	12	4770	0.12	592	RP0J471MNN0808
	680	10×12	12	5040	0.12	857	RP0J681MNN1012
	820	10×12	12	5040	0.12	1033	RP0J821MNN1012
	1000	10×12	12	5040	0.12	1260	RP0J102MNN1012
	1200	8×11	12	5040	0.12	1512	RP0J122MNN0811
	1500	8×11	12	5040	0.12	1890	RP0J152MNN0811
	1500	10×12	12	5560	0.12	1890	RP0J152MNN1012
10(1A)	220	8×8	12	4700	0.12	440	RP1A221MNN0808
	270	8×11	12	4420	0.12	540	RP1A271MNN0811
	330	8×8	12	4700	0.12	660	RP1A331MNN0808
	470	8×8	12	5100	0.12	940	RP1A471MNN0808
	470	10×12	12	5300	0.12	940	RP1A471MNN1012
	560	8×11	12	4500	0.12	1260	RP1A561MNN0811
	560	10×12	12	5300	0.12	1120	RP1A561MNN1012
	680	8×11	12	4500	0.12	1360	RP1A681MNN0811
	680	10×12	12	5300	0.12	1360	RP1A681MNN1012
	820	8×11	12	5000	0.12	1640	RP1A821MNN0811
	1000	10×12	12	5300	0.12	2000	RP1A102MNN1012
	1200	10×12	12	5300	0.12	2400	RP1A122MNN1012
16(1C)	100	8×11	12	4850	0.12	320	RP1C101MNN0811
	180	8×8	12	3840	0.12	576	RP1C181MNN0808
	180	8×11	12	4850	0.12	576	RP1C181MNN0811
	270	8×8	12	4300	0.12	864	RP1C271MNN0808
	270	8×11	12	5000	0.12	864	RP1C271MNN0811
	270	10×12	12	5300	0.12	864	RP1C271MNN1012R
	330	8×8	12	4700	0.12	1056	RP1C331MNN0808
	330	8×11	12	5000	0.12	1056	RP1C331MNN0811
	330	10×12	12	5300	0.12	1056	RP1C331MNN1012
	470	8×11	12	5300	0.12	1504	RP1C471MNN0811
	470	10×12	12	5300	0.12	1504	RP1C471MNN1012
	560	8×11	12	5000	0.12	1792	RP1C561MNN0811
	560	10×12	12	5300	0.12	1792	RP1C561MNN1012
	680	10×12	12	5300	0.12	2176	RP1C681MNN1012
	820	10×12	12	5300	0.12	2624	RP1C821MNN1012
	1000	10×12	12	5400	0.12	3200	RP1C102MNN1012



RH Series

- Low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




◆ SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105℃								
Working Voltage Range	2.5 ~ 25Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25℃ and 120Hz)								
ESR	See the standard ratings table (at 25℃, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25℃, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃ <table border="1"> <tbody> <tr> <td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≒ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ specified value</td></tr> </tbody> </table>	Capacitance change	≒ ±20% of the initial value	ESR	≒ 150% of the specified value	Dissipation factor(tanδ)	≒ 150% of the specified value	Leakage current	≒ specified value
Capacitance change	≒ ±20% of the initial value								
ESR	≒ 150% of the specified value								
Dissipation factor(tanδ)	≒ 150% of the specified value								
Leakage current	≒ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 60℃ 90 to 95% RH <table border="1"> <tbody> <tr> <td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≒ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ specified value</td></tr> </tbody> </table>	Capacitance change	≒ ±20% of the initial value	ESR	≒ 150% of the specified value	Dissipation factor(tanδ)	≒ 150% of the specified value	Leakage current	≒ specified value
Capacitance change	≒ ±20% of the initial value								
ESR	≒ 150% of the specified value								
Dissipation factor(tanδ)	≒ 150% of the specified value								
Leakage current	≒ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body

◆DIMENSIONS (mm)

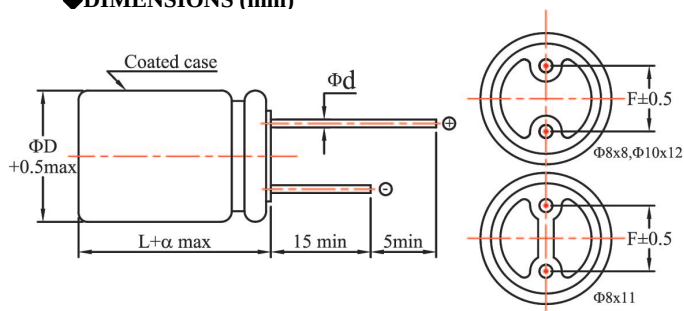


◆Lead

ΦD	8		10
Φd	0.6	0.6	0.6
L	8	11	12
α	1	1.5	1.5
F	3.5	3.5	5

◆ **Marking**



◆ PART NUMBER SYSTEM

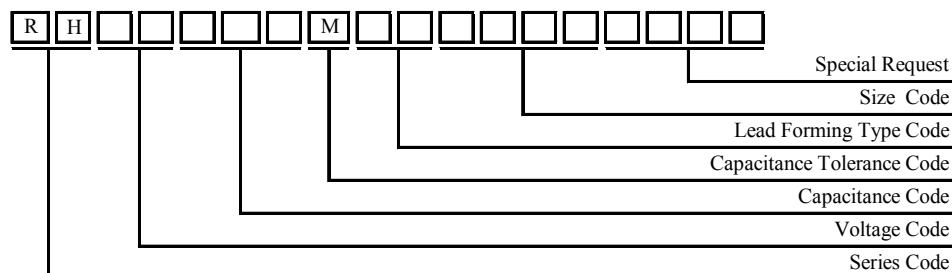


RH Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current (mA _{rms} max)		Tan δ max	Leakage Current (μA max)	Part Number
				≤ 105℃	105~125℃			
2.5(0E)	680	8×11	13	4520	1430	0.12	340	RH0E681MNN0811
	820	8×11	13	4520	1430	0.12	410	RH0E821MNN0811
4(0G)	560	8×11	13	4520	1430	0.12	448	RH0G561MNN0811
	680	8×11	13	4520	1430	0.12	544	RH0G681MNN0811
	1200	10×12	12	5440	1720	0.12	960	RH0G122MNN1012
6.3(0J)	470	8×11	13	4520	1430	0.12	592	RH0J471MNN0811
	560	8×11	13	4520	1430	0.12	706	RH0J561MNN0811
	820	10×12	12	5440	1720	0.12	1033	RH0J821MNN1012
10(1A)	120	8×8	35	2560	810	0.12	300	RH1A121MNN0808
	330	8×11	16	3950	1250	0.12	660	RH1A331MNN0811
	390	8×11	16	3950	1250	0.12	780	RH1A391MNN0811
	560	10×12	13	5230	1655	0.12	1120	RH1A561MNN1012
	1000	10×12	13	5230	1200	0.12	2000	RH1A102MNN1012
16(1C)	82	8×8	35	2560	810	0.12	300	RH1C820MNN0808
	150	8×8	35	2560	810	0.12	480	RH1C151MNN0808
	180	8×11	18	3640	1150	0.12	576	RH1C181MNN0811
	220	8×11	18	3640	1150	0.12	704	RH1C221MNN0811
	270	8×11	18	3640	1150	0.12	864	RH1C271MNN0811
	270	10×12	16	4720	1490	0.12	864	RH1C271MNN1012
	330	10×12	16	4720	1490	0.12	1056	RH1C331MNN1012
	390	10×12	16	4720	1490	0.12	1248	RH1C391MNN1012
	470	10×12	16	4720	1490	0.12	1504	RH1C471MNN1012
	820	10×12	12	5400	1630	0.12	2624	RH1C821MNN1012
25(1E)	120	8×11	27	2300	890	0.12	600	RH1E121MNN0811
	180	10×12	25	2800	1080	0.12	900	RH1E181MNN1012

GP Series

- Low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	10 ~ 25Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS (mm)

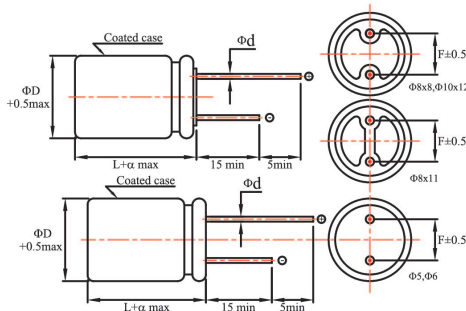


Lead

ΦD	6.3	8		10
Φd	0.6			
L	8	8	11	12
α	1	1	1.5	1.5
F	2.5	3.5		5.0

Marking



PART NUMBER SYSTEM

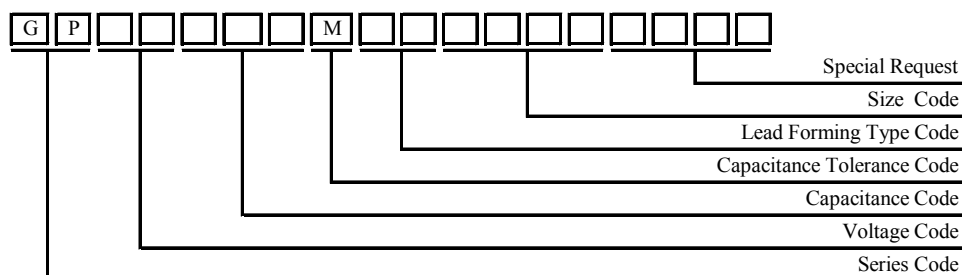



GP Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃,100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
10(1A)	470	8×8	20	3400	0.12	940	GP1A471MNN0808
	680	8×11	20	3900	0.12	1360	GP1A681MNN0811
	1000	10×12	19	6100	0.12	2000	GP1A102MNN1012
16(1C)	100	6.3×8	24	2490	0.12	320	GP1C101MNN6308
	180	8×8	19	3400	0.12	576	GP1C181MNN0808
	330	10×12	19	4500	0.12	1056	GP1C331MNN1012
	470	10×12	19	4500	0.12	1504	GP1C471MNN1012
25(1E)	47	8×11	30	2500	0.12	568	GP1E470MNN0811
	68	8×11	24	3320	0.12	425	GP1E680MNN0811
	100	10×12	20	4320	0.12	625	GP1E101MNN1012

GV Series

- Low ESR at a high frequency range
- High ripple current capability
- High voltage 25~100V
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	25 ~ 100Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS (mm)

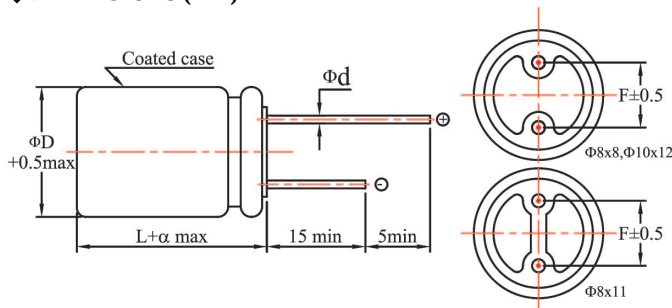


Lead

ΦD	8	8	10
Φd	0.6	0.6	0.6
L	8	11	12
α	1	1.5	1.5
F	3.5	3.5	5

Marking



PART NUMBER SYSTEM

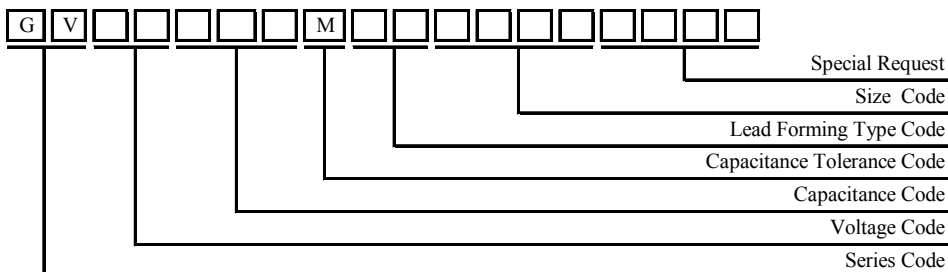

GV Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃, 100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
25(1E)	150	6.3×8	18	3200	0.12	750	GV1E151MNN6308
	180	8×8	18	4100	0.12	900	GV1E181MNN0808
	180	8×11	16	4650	0.12	900	GV1E181MNN0811
	220	8×8	18	4100	0.12	1100	GV1E221MNN0808
	270	10×12	16	5000	0.12	1350	GV1E271MNN1012
	330	10×12	14	5000	0.12	1650	GV1E331MNN1012
	390	10×12	14	5000	0.12	1950	GV1E391MNN1012
	470	10×12	14	5000	0.12	2350	GV1E471MNN1012
35(1V)	18	8×11	34	2100	0.12	300	GV1V180MNN0811
	39	8×11	30	2100	0.12	300	GV1V390MNN0811
	47	8×11	30	2100	0.12	329	GV1V470MNN0811
	82	8×11	27	2300	0.12	574	GV1V820MNN0811
	100	8×11	27	2300	0.12	700	GV1V101MNN0811
	100	10×12	26	2700	0.12	700	GV1V101MNN1012
	120	10×12	26	2700	0.12	840	GV1V121MNN1012
	150	10×12	26	2700	0.12	1050	GV1V151MNN1012
	220	10×12	26	2700	0.12	1540	GV1V221MNN1012
50(1H)	27	8×11	33	2000	0.12	300	GV1H270MNN0811
	39	8×11	29	2200	0.12	390	GV1H390MNN0811
	47	10×12	29	2500	0.12	470	GV1H470MNN1012
	68	10×12	28	2600	0.12	680	GV1H680MNN1012
63(1J)	47	10×12	29	2600	0.12	592	GV1J470MNN1012
	68	10×12	29	2600	0.12	857	GV1J680MNN1012
100(2A)	18	8×11	40	1850	0.12	360	GV2A180MNN0811
	47	10×12	38	2100	0.12	940	GV2A470MNN1012

GS Series

- Low ESR at a high frequency range
- High ripple current capability
- Large capacitance, size 8x16~10x20
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	16 ~ 25Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body

DIMENSIONS (mm)

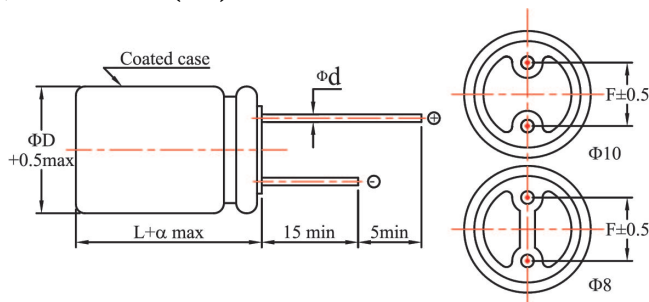


Lead

ΦD	8	10
Φd	0.6	0.6
L	16~20	16~20
α	1.5	1.5
F	3.5	5.0

Marking



PART NUMBER SYSTEM

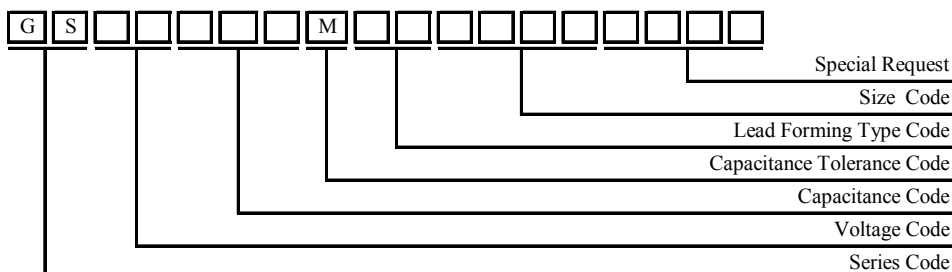



GS Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃,100KHz (mA _{rms} max)	Tan δ _{max}	Leakage Current (μA max)	Part Number
16(1C)	1000	8×20	8	6100	0.12	1600	GS1C102MNN0820P
	1200	8×20	8	6100	0.12	1920	GS1C122MNN0820P
	1500	10×16	8	6100	0.12	2400	GS1C152MNN1016P
	1800	10×20	8	6100	0.12	2880	GS1C182MNN1020P
	2200	10×20	8	6100	0.12	3520	GS1C222MNN1020P
	2700	10×20	10	5700	0.12	4320	GS1C272MNN1020P
25(1E)	470	8×20	16	4650	0.12	2350	GS1E471MNN0820P

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



SG Series

- Low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C



SPECIFICATIONS


Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 63Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C


※2 ESR should be measured at both of the terminal ends closest to the capacitor body

DIMENSIONS (mm)


Marking

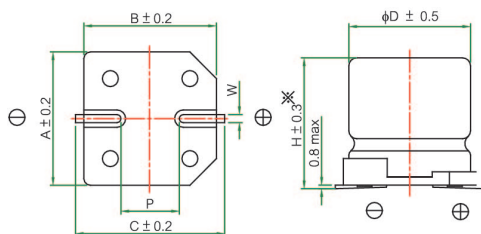

Code	Case Size	ΦD	L	A	B	C	W	P
5057	5×5.7	5	5.7	5.3	5.3	5.9	0.5~0.8	1.4
6357	6.3×5.7	6.3	5.7	5.6	6.6	7.3	0.5~0.8	2.1
6397	6.3×9.7	6.3	9.7	5.6	6.6	7.3	0.7~1.1	3.2
8067	8×6.7	8	6.7	8.3	8.3	9	0.7~1.1	3.2
8097	8×9.7	8	9.7	8.3	8.3	9	0.7~1.1	3.2
1077	10×7.7	10	7.7	10.3	10.3	11	0.7~1.1	4.6
1124	10×12.4	10	12.4	10.3	10.3	11	0.7~1.1	4.6



PART NUMBER SYSTEM

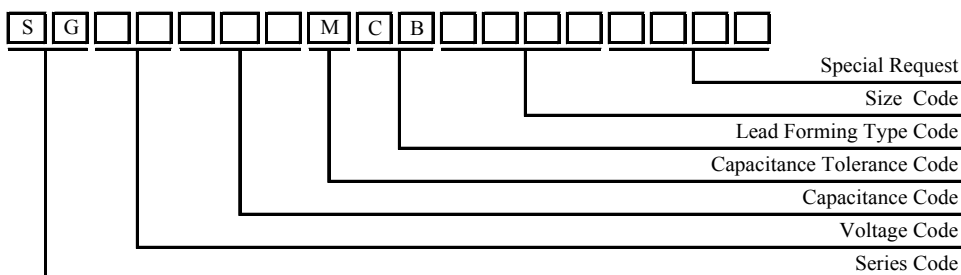

SG Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105°C, 100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	220	6.3×5.7	25	2500	0.12	300	SG0E221MCB6357
	560	6.3×5.7	25	2500	0.12	420	SG0E561MCB6357
	680	8×6.7	20	3370	0.12	510	SG0E681MCB8067
	1500	10×12.4	12	5400	0.12	1125	SG0E152MCB1124
	2700	10×12.4	12	5070	0.12	2025	SG0E272MCB1124
4(0G)	100	6.3×5.7	35	2200	0.12	300	SG0G101MCB6357
	150	5×5.7	30	1490	0.12	300	SG0G151MCB5057
	330	6.3×5.7	27	2700	0.12	400	SG0G331MCB6357
	680	10×7.7	20	4130	0.12	816	SG0G681MCB1077
	1200	10×12.4	12	5500	0.12	1440	SG0G122MCB1124
6.3(0J)	82	6.3×5.7	35	2200	0.12	300	SG0J820MCB6357
	100	5×5.7	35	1380	0.12	300	SG0J101MCB5057
	220	6.3×5.7	27	2320	0.12	416	SG0J221MCB6357
	330	10×7.7	22	3600	0.12	624	SG0J331MCB1077
	390	8×6.7	18	3220	0.12	737	SG0J391MCB8067
	820	10×12.4	12	5500	0.12	1550	SG0J821MCB1124
10(1A)	47	6.3×5.7	40	2100	0.12	300	SG1A470MCB6357
	56	6.3×5.7	40	2100	0.12	300	SG1A560MCB6357
	120	8×6.7	30	2600	0.12	360	SG1A121MCB8067
	270	10×7.7	25	3500	0.12	810	SG1A271MCB1077
	330	10×7.7	25	3770	0.12	990	SG1A331MCB1077
	560	10×12.4	13	5300	0.12	1680	SG1A561MCB1124
16(1C)	33	6.3×5.7	37	2050	0.12	300	SG1C330MCB6357
	39	6.3×5.7	45	2000	0.12	300	SG1C390MCB6357
	82	8×6.7	40	2300	0.12	394	SG1C820MCB8067
	100	6.3×5.7	24	2490	0.12	300	SG1C101MCB6357
	100	10×7.7	30	3200	0.12	480	SG1C101MCB1077
	180	6.3×5.7	22	3300	0.12	576	SG1C181MCB6357
	180	10×7.7	29	3200	0.12	864	SG1C181MCB1077
	270	6.3×9.7	22	3300	0.12	864	SG1C271MCB6397
	330	8×9.7	16	3890	0.12	1584	SG1C331MCB8097
	330	10×12.4	16	4800	0.12	1584	SG1C331MCB1124
	560	10×12.4	16	4720	0.12	1792	SG1C561MCB1124
	1000	10×12.4	18	4300	0.12	3200	SG1C102MCB1124
25(1E)	47	6.3×5.7	30	2800	0.12	235	SG1E470MCB6357
35(1V)	47	10×12.4	28	3800	0.12	410	SG1V470MCB1124
	100	10×12.4	29	2600	0.12	700	SG1V101MCB1124
	220	10×12.4	28	2600	0.12	1540	SG1V221MCB1124
50(1H)	100	10×12.4	27	3600	0.12	1000	SG1H101MCB1124
63(1J)	22	8×9.7	37	1700	0.12	300	SG1J220MCB8097

SP Series

- Super Low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 25Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table.(Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C


※2 ESR should be measured at both of the terminal ends closest to the capacitor body

DIMENSIONS

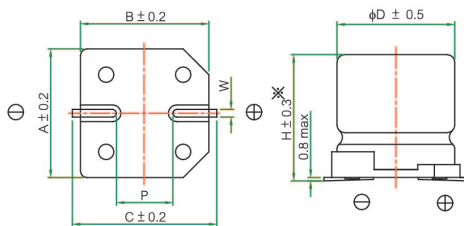


Code	Case Size	ΦD	L	A	B	C	W	P
5057	5×5.7	5	5.7	5.3	5.3	5.9	0.5~0.8	1.4
6343	6.3×4.3	6.3	4.3	5.6	6.6	7.3	0.5~0.8	2.1
6357	6.3×5.7	6.3	5.7	5.6	6.6	7.3	0.5~0.8	2.1
8067	8×6.7	8	6.7	8.3	8.3	9	0.7~1.1	3.2
8097	8×9.7	8	9.7	8.3	8.3	9	0.7~1.1	3.2
1077	10×7.7	10	7.7	10.3	10.3	11	0.7~1.1	4.6
1124	10×12.4	10	12.4	10.3	10.3	11	0.7~1.1	4.6

Marking



PART NUMBER SYSTEM

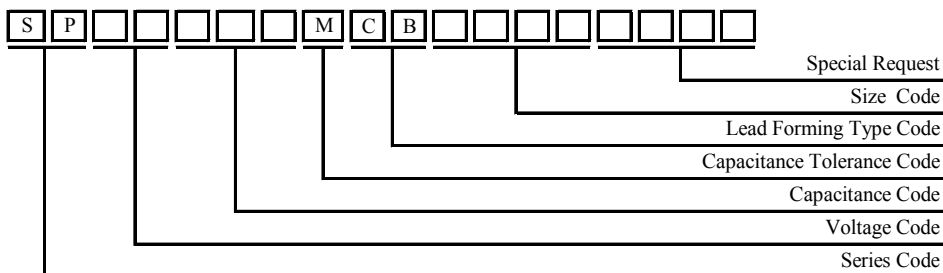

SP Series

◆ Standard Ratings


Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃, 100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	180	5×5.7	21	2670	0.12	300	SP0E181MCB5057
	330	5×5.7	15	3150	0.12	300	SP0E331MCB5057
	330	6.3×4.3	17	3500	0.12	413	SP0E331MCB6343
	330	6.3×4.3	12	3500	0.12	700	SP0E331MCB6343E
	390	6.3×5.7	15	3160	0.12	344	SP0E391MCB6357
	560	6.3×5.7	16	3600	0.12	420	SP0E561MCB6357
	560	6.3×5.7	10	3870	0.12	500	SP0E561MCB6357E
	680	8×6.7	13	4100	0.12	510	SP0E681MCB8067
	820	8×7.7	12	4260	0.12	615	SP0E821MCB8077
	1000	8×7.7	12	4260	0.12	750	SP0E102MCB8077
	2700	10×12.4	12	5070	0.12	2025	SP0E272MCB1124
4(0G)	330	6.3×5.7	15	3160	0.12	396	SP0G331MCB6357
	1500	8×11.7	12	4700	0.12	1800	SP0G152MCB8117
6.3(0J)	100	5×5.7	24	2500	0.12	300	SP0J101MCB5057
	120	5×5.7	24	2500	0.12	300	SP0J121MCB5057
	220	6.3×4.3	17	3160	0.12	693	SP0J221MCB6343
	220	6.3×5.7	15	3160	0.12	416	SP0J221MCB6357
	330	6.3×5.7	17	3600	0.12	624	SP0J331MCB6357
	470	8×11.7	15	3950	0.12	888	SP0J471MCB8117
10(1A)	330	8×11.7	17	3950	0.12	990	SP1A331MCB8117
16(1C)	100	6.3×5.7	24	2490	0.12	320	SP1C101MCB6357
	180	8×9.7	16	3890	0.12	576	SP1C181MCB8097
	270	8×9.7	16	3890	0.12	864	SP1C271MCB8097
25(1E)	47	6.3×5.7	30	2500	0.12	588	SP1E470MCB6357
	100	8×9.7	24	3300	0.12	500	SP1E101MCB8097
	120	8×9.7	22	3500	0.12	600	SP1E121MCB8097

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



SU Series

- Ultra low ESR at a high frequency range
- High ripple current capability
- 2,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 6.3Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>ESR</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 150\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	ESR	$\leq 150\%$ of the specified value	Dissipation factor(tanδ)	$\leq 150\%$ of the specified value	Leakage current	$\leq$ specified value
Capacitance change	$\leq \pm 20\%$ of the initial value								
ESR	$\leq 150\%$ of the specified value								
Dissipation factor(tanδ)	$\leq 150\%$ of the specified value								
Leakage current	$\leq$ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C

※2 ESR should be measured at both of the terminal ends closest to the capacitor body


DIMENSIONS

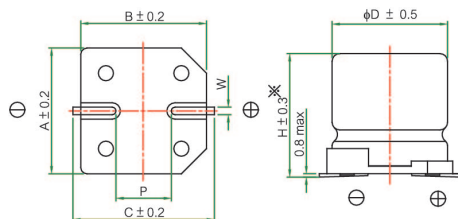


Code	Case Size	D	L	A	B	C	W	P
5057	5×5.7	5	5.7	5.3	5.3	5.9	0.5~0.8	1.4
6357	6.3×5.7	6.3	5.7	5.6	6.6	7.3	0.5~0.8	2.1
8067	8×6.7	8	6.7	8.3	8.3	9	0.7~1.1	3.2

Marking

≤ 6.3 Φ



PART NUMBER SYSTEM

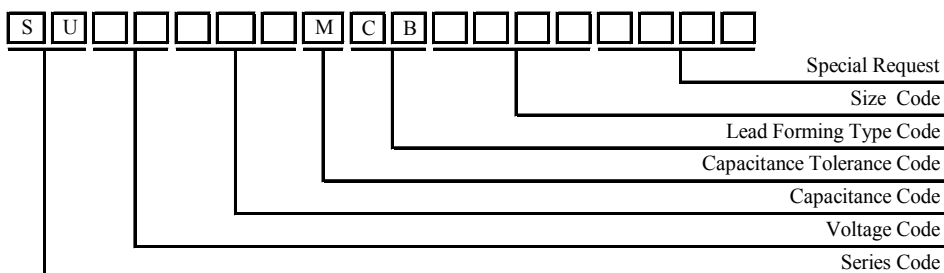



SU Series

◆ Standard Ratings

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃,100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	330	5×5.7	12	3860	0.12	300	SU0E331MCB5057
	390	5×5.7	10	3650	0.12	300	SU0E391MCB5057
	390	6.3×5.7	10	3650	0.12	300	SU0E391MCB6357
6.3(0J)	330	6.3×5.7	10	3900	0.12	623	SU0J331MCB6357
	390	8×6.7	9	4500	0.12	737	SU0J391MCB8067

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS



SE Series

- Super low ESR at a high frequency range
- High ripple current capability
- 5,000 hours at 105°C




SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-55 ~ +105°C								
Working Voltage Range	2.5 ~ 35Vdc								
Surge Voltage	Rated Voltage x1.15								
Capacitance Tolerance	M: ±20% (at 25°C and 120Hz)								
ESR	See the standard ratings table (at 25°C, 100~300KHz)								
Dissipation Factor (Tanδ)	See the standard ratings table (at 25°C, 120Hz)								
Leakage Current ※1	See the standard ratings table (Impress the rated voltage for 2 minutes)								
Low Temperature Characteristics Impedance Ratio	$Z(-25^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.15$ at 100KHz $Z(-55^{\circ}\text{C})/Z(+25^{\circ}\text{C}) \leq 1.25$ at 100KHz								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105°C <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								
Damp Heat (Steady State)	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 60°C 90 to 95% RH <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>ESR</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≤ 150% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≤ specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	ESR	≤ 150% of the specified value	Dissipation factor(tanδ)	≤ 150% of the specified value	Leakage current	≤ specified value
Capacitance change	≤ ±20% of the initial value								
ESR	≤ 150% of the specified value								
Dissipation factor(tanδ)	≤ 150% of the specified value								
Leakage current	≤ specified value								

※1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C


※2 ESR should be measured at both of the terminal ends closest to the capacitor body

DIMENSIONS

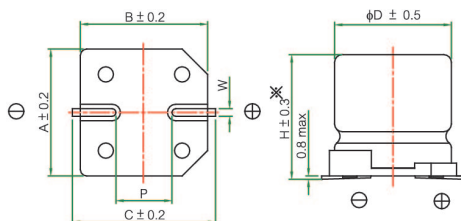


Code	Case Size	ΦD	L	A	B	C	W	P
6357	6.3×5.7	6.3	5.7	5.6	6.6	7.3	0.5~0.8	2.1
8067	8×6.7	8	6.7	8.3	8.3	9	0.7~1.1	3.2
8117	8×11.7	8	11.7	8.3	8.3	9	0.7~1.1	3.2
8122	8×12.2	8	12.2	8.3	8.3	9	0.7~1.1	3.2
1124	10×12.4	10	12.4	10.3	10.3	11	0.7~1.1	4.6

Marking



PART NUMBER SYSTEM

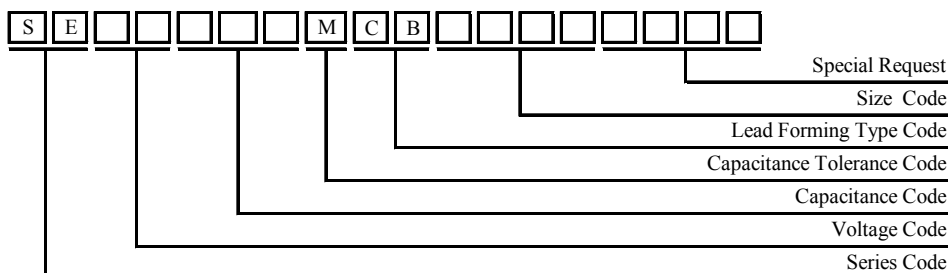

SE Series

◆ Standard Rating

Rated Voltage (Vdc)	Rated Capacitance (μF)	Case Size ΦD×L (mm)	ESR 100~300KHz (mΩ max)	Rated Ripple Current 105℃, 100KHz (mA rms max)	Tan δ max	Leakage Current (μA max)	Part Number
2.5(0E)	560	6.3×5.7	16	3500	0.10	300	SE0E561MCB6357
4(0G)	560	8×6.7	22	3220	0.10	448	SE0G561MCB8067
6.3(0J)	220	6.3×5.7	15	3160	0.10	300	SE0J221MCB6357
	330	6.3×5.7	15	3160	0.10	416	SE0J331MCB6357
	390	8×6.7	22	3220	0.10	491	SE0J391MCB8067
10(1A)	120	6.3×5.7	22	2600	0.10	300	SE1A121MCB6357
	270	8×6.7	22	3220	0.10	540	SE1A271MCB8067
16(1C)	68	6.3×5.7	40	2450	0.10	544	SE1C680MCB6343
	100	6.3×5.7	24	2490	0.10	320	SE1C101MCB6357
	270	8×9.7	16	4070	0.10	864	SE1C271MCB8097
	270	8×11.7	11	4070	0.10	864	SE1C271MCB8117
	560	8×12.2	16	3800	0.10	1792	SE1C561MCB8122
	560	10×12.4	16	3800	0.10	1792	SE1C561MCB1124
25(1E)	47	6.3×5.7	30	2500	0.10	588	SE1E470MCB6357
	100	8×9.7	24	3300	0.10	500	SE1E101MCB8097
35(1V)	120	10×12.6	32	2400	0.10	840	SE1V121MCB1126

ALUMINUM ELECTROLYTIC CAPACITORS



Application Guidelines

1-1-1. Circuit Design

- (1) Please make sure the application and mounting conditions to which the capacitor will be exposed are within the conditions specified in the catalog or alternate product specification (Referred as to specification here after).
- (2) Operating temperature and applied ripple current shall be within the specification.

The capacitor shall not be used in an ambient temperature which exceeds the operating temperature specified in the specification.

Do not apply excessive current which exceeds the allowable ripple current.
- (3) Appropriate capacitors which comply with the life requirement of the products should be selected when designing the circuit.
- (4) Aluminum electrolytic capacitors are polarized. Make sure that no reverse voltage of AC voltage is applied to the capacitors. Please use bi-polar capacitors for a circuit that can possibly see reversed polarity.

Note: Even bi-polar capacitors can not be used for AC voltage application.
- (5) For a circuit that repeats rapid charging/discharging of electricity, an appropriate capacitor that is capable of enduring such a condition must be used. Welding machines and photoflash are a few examples of products that contain such a circuit. In addition, rapid charging/discharging may be repeated in control circuits for servomotors, in which the circuit voltage fluctuates substantially.

For appropriate choice of capacitors for circuit that repeat rapid charging/discharging. Please consult us.
- (6) For conductive polymer solid capacitors, the leakage current may become greater even if the soldering conditions adhere to the specification requirements. Therefore, do not use such capacitors in the following circuits because trouble or failure may occur.
 - a) High impedance circuits
 - b) Coupling circuits
 - c) Time constant circuits
 - d) Do not use the capacitors in circuits except those above if changes in the leakage current affects circuit operations.
- (7) It is said that to restrain output ripple current, the output smoothing capacitor of the switching power supply is suitable to use the smaller ESR capacitor. However when the low ESR capacitor is used, the phenomenon sometimes occurs that is called the abnormal oscillation of output voltage. 30 degrees to 40 degrees or more of phase margin is thought as a necessity to inhibit the oscillation of output voltage with a general negative feed-back circuit. The phase margin is numerical value how much the minimum value of the phase is distant from -180 degrees. The smaller the phase margin gets, the higher the possibility to oscillate by the characteristic dispersion and temperature change of the component will be.

By doing phase compensation with the feed-back circuit of the error amplifier the oscillation of output voltage can be inhibited.
- (8) Make sure that no excess voltage (that is, higher than the rated voltage) is applied to the capacitor.

Please pay attention so that the peak voltage. Which is DC voltage overlapped by ripple current, will not exceed the rated voltage.

In the case where more than 2 aluminum electrolytic capacitors are used in series. Please make sure that applied voltage will be lower than rated voltage and the voltage will be applied to each capacitor equally using a balancing resistor in parallel with the capacitors.

- (9) Outer sleeve of the capacitor is not guaranteed as an electrical insulator . Do not use a standard sleeve on a capacitor in applications that require the electrical insulation. When the application requires special insulation. Please contact us for details.
- (10) Capacitors may fail if they are used under the following conditions:
- ① Environmental (climatic) conditions
 - (a) Being exposed to water, high temperature & high humidity atmosphere , or condensation of moisture.
 - (b) Being exposed to oil or an atmosphere that is filled with particles of oil.
 - (c) Being exposed to salty water or an atmosphere that is filled with particles of salt.
 - (d) In an atmosphere filled with toxic gasses (such as hydrogen sulfide, sulfurous acid , nitrous acid, chlorine , bromine , methyl bromide , ammonia, etc.)
 - (e) Being exposed to direct sunlight . ozone , ultraviolet ray , or radiation
 - (f) Being exposed to acidic or alkaline solutions
 - ② Under severe conditions where vibration and /or mechanical shock exceed the applicable ranges of the specifications.
- (11) When designing a P.C. board , please pay attention to the following:
- ① Have the hole spacing on the P.C. board match the lead spacing of the capacitor.
 - ② There should not be any circuit pattern or circuit wire above the capacitor pressure relief vent.
 - ③ Unless otherwise specified, following clearance should be made above the pressure relief vent.

Case Diameter	Clearance Required
Φ6.3~16mm	2mm or more
Φ18~35mm	3mm or more
Φ40mm or more	5mm or more
 - ④ In case the vent side is placed toward P.C board (such as end seal vented parts), make a corresponding hole on the P.C. board to release the gas when vent is operated . The hole should be made to match the capacitor vent position.
 - ⑤ Screw terminal capacitors must be installed with their end seal side facing up. When you install a screw terminal capacitor in a horizontal position. the positive terminal must be in the upper position.
- (12) The main chemical solution of the electrolyte and the separator paper used in the capacitors are combustible. The electrolyte is conductive When it comes in contact with the P.C. board. there is a possibility of pattern corrosion or short circuit between the circuit pattern which could result in smoking or catching fire. Do not locate any circuit pattern beneath the capacitor end seal.
- (13) Do not design a circuit board so that heat generating components are placed near an aluminum electrolytic capacitor or reverse side of P.C. board (under the capacitor).
- (14) Electrical characteristics may vary depending on changes in temperature and frequency . please consider this variation when you design circuits.
- (15) When you mount capacitors on the double-sided P.C.boards do not place capacitors on circuit patterns or over on unused holes.
- (16) The torque for terminal screw or brackets screws shall be within the specified value in specifications.

- (17) When you install more than 2 capacitors in parallel, consider the balance of current flowing through the capacitors . Especially, When a solid conductive polymer aluminum electrolytic capacitor and a standard aluminum electrolytic capacitor are connected in parallel , special consideration must be given.
- (18) if more than 2 aluminum electrolytic capacitors are used in series , make sure the applied voltage will be lower than the rated voltage and that voltage will be applied to each capacitor equally using a balancing resistor in parallel with each capacitor.

1-1-2. Mounting

- (1) Once a capacitor has been assembled in the set and power applied . Even if a capacitor is discharged . an electric potential (recovery voltage)may exist between the terminals.
- (2) Electric potential between positive and negative terminal may exist as a result of returned electromotive force. so please discharge the capacitor using a 1 k resistor.
- (3) Leakage current of the parts that have been stored for more than 1 year may increase. If leakage current has increased, please perform a voltage treatment using 1 k resistor.
- (4) Please confirm ratings before installing capacitors on the P.C. board.
- (5) Please confirm polarity before installing capacitors on the P.C. board.
- (6) Do not drop capacitors on the floor , nor use a capacitor that was dropped.
- (7) Do not damage the capacitor while installing.
- (8) Please confirm that the lead spacing of the capacitor matches the hole spacing of the P.C. board prior to installation.
- (9) Snap-in type capacitor should be installed tightly to the P.C. board (allow no gap between the P.C. board and bottom of the capacitor).
- (10) Please pay attention that the clinch force is not too strong when capacitors are placed and fixed by an automatic insertion machine.
- (11) Please pay attention to that the mechanical shock to the capacitor by suction nozzle of the automatic insertion machine or automatic mounted. or by product checker, or by centering mechanism.
- (12) Hand soldering.
 - ① Soldering condition shall be confirmed to be within the specification.
 - ② If it is necessary that the leads must be formed due to a mismatch of the lead space to hole space on the board . bend the lead prior to soldering without applying too much stress to the capacitor.
 - ③ If you need to remove parts which were soldered . please melt the solder enough so that stress is not applied to lead.
 - ④ Please pay attention so that solder iron does not touch any portion of capacitor body.

(13) Flow soldering (wave solder)

- ① Aluminum capacitor body must not be submerged into the solder bath . Aluminum capacitors must be mounted on the “top side” of the P.C. board and only allow the bottom side of the P.C. board to come in contact with the solder.
- ② Soldering condition must be confirmed to be within specification. Solder temperature: $260 \pm 5^{\circ}\text{C}$, Immersing lead time: 10 ± 1 second. Thickness of P.C. board : 1.6mm.
- ③ Please avoid having flux adhere to any portion except the terminal.
- ④ Please avoid contact between other components and the aluminum capacitor.

(14) Reflow soldering (SMD only)

- ① Soldering condition must be confirmed to be within specification.
Pre - heating : Less than 150°C , 90 seconds max . Max. temperature at capacitor top during reflow: 230°C
The duration for over 200°C temperature at capacitor top: 20 seconds max.
The duration from the pre-heat temperature to peak temperature of reflow varies due to changes of the peak temperature.
- ② When an infrared heater is used . please pay attention to the extent of heating since the absorption rate of infrared . will vary due to difference in the color of the capacitor body. material of the sleeve and capacitor size.
- ③ The number of reflow time for SMT aluminum electrolytic capacitors shall be one time . if this type of capacitor has to be inevitably subjected to the reflow twice , enough cooling time between the first and second reflow (at least more than 30 minutes) shall be taken to avoid consecutive reflow , please contact us if you have questions.

(15) Soldering flux

There are non-halogen types of flux that do not contain ionic halides, but contain many non-ionic halides. When these non-ionic halides infiltrate the capacitor , they cause a chemical reaction that is just as harmful as the use of cleaning agents. Use soldering flux that does not contain non-ionic halides.

(16) Do not tilt lay down or twist the capacitor body after the capacitors are soldered to the P.C. board.

(17) Do not carry the P.C. board by grasping the soldered capacitor.

(18) Please do not allow anything to touch the capacitor after soldering . if P.C. board are stored in a stack , please make sure P.C. board or the other components do not touch the capacitor.

The capacitors shall not be effected by any radiated heat from the soldered P.C. board or other components after soldering .

1-1-3 In the equipment

- (1) Do not directly touch terminal by hand.
- (2) Do not short between terminals with conductor , not spill conductible liquid such as alkaline or acidic solution on or near the capacitor .
- (3) Please make sure that the ambient conditions where the set is installed will be free from spilling water or oil. direct sunlight. ultraviolet rays . radiation, poisonous gases, vibration or mechanical shock.

1-1-4. Maintenance inspection

Please periodically inspect the aluminum capacitors that are installed in industrial equipment . The following items should be checked:

- ① Appearance: Remarkable abnormality such as vent operation . leaking electrolyte etc.
- ② Electrical characteristic: Capacitance, dielectric loss tangent . leakage current . and items specified in the specification.

1-1-5. In an Emergency

- (1) If you see smoke due to operation of safety vent .turn off the main switch or pull out the plug from the outlet.
- (2) Do not bring your face near the capacitor when the pressure relief vent operates. The gasses emitted from that are over 100°C.

If the gas gets into your eyes . please flush your eyes immediately in pure water.

If you breathe the gas . immediately wash out your mouth and throat with water.

Do not ingest electrolyte. if your skin is exposed to electrolyte. Please wash it away using soap and water.

1-1-6. Storage

- (1) It is recommended to keep capacitors between the ambient temperatures of 5°C to 35°C and a relative humidity of 75% or below.
- (2) Confirm that the environment does not have any of the following conditions:
 - ① where capacitors are exposed to water, high temperature & high humidity atmosphere , or condensation of moisture.
 - ② Where capacitors are exposed to oil or an atmosphere that is filled with particles of oil.
 - ③ Where capacitors are exposed to salty water. high temperature & high humidity atmosphere , or condensation of moisture.
 - ④ The atmosphere is filled with toxic acid gasses (e.g. hydrogen sulfide . sulfurous acid , nitrous acid. chlorine. bromine , methyl bromide . etc.)
 - ⑤ The atmosphere is filled with toxic alkaline gasses (e.g. ammonia)

Where capacitors are exposed to acidic or alkaline solutions.

1-1-7. Disposal

Take either of the following methods in disposing of capacitors.

Make a hole in the capacitor body or crush capacitors and incinerate them.

If incineration is not applicable , hand them over to a waste disposal agent and have them buried in a landfill.

STANDARDIZATION

1. NEW PRODUCT

Type	Series	Characteristics	Page
RB	RF NEW	Low impedance, Downsize, Long life	104
	TD NEW	High-temperature 130℃, High reliability.	112
	TX NEW	High-temperature 135℃, High reliability.	115
	KY NEW	Downsize, High ripple current, Long life	131
	MW NEW	Low ESR, High ripple current	133
	MV NEW	Low ESR, High ripple current, long life	135
	MJ NEW	Low ESR, Downsize, High ripple current, long life	137
	MZ NEW	Low ESR, High ripple current, Ultra miniature size	145
	MA NEW	Low ESR, long life, Ultra miniature size	147
	MQ NEW	Low ESR, High ripple current, long life, Ultra miniature size	149

2. The below old series have been updated, we would like to recommend new series as below table.

At the same time, the approval items of old series can make delivery continually

Type	Discontinued Series	Characteristics	Replacements Series	Page
RB	SV	7~9mm height, Long life	ER	61
	BP	Bi-polar, Horizontal Deflection	—	—
	PS	General, Downsize, High temperature, 105℃ 1,000	PF	78
	ES	Low impedance, High ripple current	EL	81
	EA	Extremely Low Impedance, Downsize		
	DW	High ripple current, Downsize	MW	133
	DV	High ripple current, Long life	MV	135
	DJ	High ripple current, Long life	MJ	137
	DZ	Downsize, High ripple current	MZ	145
	DA	Long life, High ripple current, Downsize	MA	147
	DQ	Long life, High ripple current, Downsize	MQ	149
	LM	Energy-saving lamps, General, Downsize	LF	123
	LS	Energy-saving lamps, General, Downsize, High ripple current		
Snap-in	GH	High ripple current, 85℃ 2,000	GM	164
	GS	General, Long life, 85℃ 3,000	GSF	171
	GV	High ripple current, Load life, 85℃ 5,000	GVF	173
	PH	High ripple current, 105℃ 1,000 ~ 2,000	PL	179
	PD	Smaller size with High ripple current, 105℃ 3,000	PK	183
	GA	Audio equipment, Snap-in Terminal Type, 85℃ 1,000	—	—
	GL	Audio equipment, Lug Terminal Type, 85℃ 1,000	—	—



Capacitor Series Table

◆ RADIAL LEAD TYPE

Series		Pgs	Features	Voltage Range (Vdc)	Capacitance Range (μF)	Sleeve Color	Temperature Endurance (Hours)
Mini Size	SS	49	7mm height	6.3 to 63	0.1 to 330	Dark Blue	85°C 1,000
	SS-H	49	7mm height, High temperature	6.3 to 63	0.1 to 330	Black	105°C 1,000
	SB	52	5mm height	4 to 50	0.1 to 470	Dark Blue	85°C 1,000
	SB-H	52	5mm height, High temperature	4 to 50	0.1 to 470	Black	105°C 1,000
	SF	55	7mm height	6.3 to 63	0.1 to 220	Black	105°C 2,000
	LK	57	Downsize, High ripple current ,12 mm height	160 to 200	22 to 39	Black	105°C 4,000
	EM	59	Low Impedance, High ripple current, Miniature Size	6.3 to 35	33 to 470	Brown	105°C 1,000 to 2,000
	ER	61	Low Impedance, miniature size with 7 to 9 mm height	6.3 to 35	33 to 470	Brown	105°C 3,000
	EH	63	Low Impedance ,High ripple current, 9 mm height	10 to 35	150 to 820	Brown	105°C 3,000 to 4,000
	EP	65	Miniaturized, Low Impedance, 12 mm height	10 to 100	68 to 1,800	Brown	105°C 4,000
	EC	67	Miniaturized, Low ESR and low impedance.	10 to 100	68 to 1,800	Brown	105°C 5,000
Standard	ND	69	Non-Polar Standard	6.3 to 250	0.47 to 2,200	Dark Blue	85°C 2,000
	ND-H	69	Non-Polar High temperature	6.3 to 250	0.47 to 2,200	Black	105°C 1,000
	LB	72	Low Leakage Current	6.3 to 100	0.47 to 4,700	Dark Blue	85°C 2,000
	LB-H	72	Low Leakage Current, High temperature	6.3 to 100	0.47 to 4,700	Black	105°C 1,000
	SM	75	General, Downsize	6.3 to 450	0.1 to 22,000	Dark Blue	85°C 2,000
	PF	78	Standard	6.3 to 450	0.47 to 22,000	Black	105°C 2,000
High Frequency, Low Impedance	EL	81	Extremely Low Impedance, Downsize	6.3 to 50	56 to 6,800	Brown	105°C 2,000
	EB	83	Extremely Low Impedance, High ripple current	6.3 to 16	82 to 3,300	Brown	105°C 1,000 to 2,000
	ED	85	Low Impedance, High ripple current	6.3 to 100	10 to 10,000	Brown	105°C 2,000 to 5,000
	EK	88	Miniaturized, Low Impedance, High ripple current	6.3 to 50	0.1 to 6,800	Brown	105°C 2,000 to 5,000
	EV	91	Low Impedance, High ripple current	6.3 to 35	10 to 8,200	Brown	105°C 3,000 to 6,000
	EJ	94	Low Impedance, Long life	6.3 to 63	10 to 10,000	Brown	105°C 3,000 to 5,000
	EG	97	Low Impedance, High ripple current, Long Life	6.3 to 63	10 to 10,000	Brown	105°C 3,000 to 6,000
	EY	100	Miniaturized, Low impedance, High ripple current	6.3 to 100	6.8 to 18,000	Brown	105°C 4,000 to 10,000
High reliability	NEW RF	104	Low impedance, Downsize,, Long life	6.3 to 100	6.8 to 18,000	Brown	105°C 6,000 to 12,000
	PY	108	High-temperature 125°C, high reliability.	10 to 450	4.7 to 1,000	Black	125°C 2,000
	TL	110	High-temperature 125°C, long life	10 to 50	22 to 1,000	Black	125°C 3,000 to 5,000
	NEW TD	112	High-temperature 130°C, high reliability.	10 to 450	4.7 to 4700	Black	130°C 1,000 to 4,000
	NEW TX	115	High-temperature 135°C, high reliability.	10 to 50	22 to 1,000	Black	135°C 1,000 to 2,000

ALUMINUM ELECTROLYTIC CAPACITORS



Series		Pags	Features	Voltage Range (Vdc)	Capacitance Range (μF)	Sleeve Color	Temperature Endurance (Hours)
Power supply with the product	PW	117	High ripple current, Downsize	200 to 500	10 to 470	Black	105°C 2,000
	PC	119	Downsize, Ideal for low profile power supply applications	200 to 450	56 to 560	Black	105°C 2,000
	PV	121	Downsize with high ripple current	200 to 450	6.8 to 470	Black	105°C 2,000 to 5,000
	LF	123	Energy-saving lamps, Standard Downsize	200 to 450	1 to 68	Black	105°C 2,000
	LL	125	Energy-saving lamps, High ripple current , Long life	200 to 450	1 to 68	Black	105°C 2,000 to 5,000
	PJ	127	long life 8,000 to 10,000 hours	160 to 500	6.8 to 330	Black	105°C 8,000 to 10,000
	KJ	129	Downsize, High ripple current , Long life	160 to 450	6.8 to 560	Black	105°C 10,000 to 12,000
	NEW KY	131	Downsize, High ripple current, Long life	160 to 450	6.8 to 470	Black	105°C 12,000 to 15,000
	NEW MW	133	Low ESR, High ripple current	200 to 450	68 to 470	Black	105°C 2,000
	NEW MV	135	Low ESR, High ripple current , long life	200 to 450	6.8 to 470	Black	105°C 5,000
	NEW MJ	137	Low ESR, Downsize , High ripple current , long life	200 to 450	6.8 to 330	Black	105°C 8,000 to 10,000
	PZ	139	Ideal for low profile power supply applications	200 to 450	18 to 270	Black	105°C 2,000
	PA	141	105°C Long life 5,000 hours, Ultra miniature size	400 to 450	33 to 120	Black	105°C 5,000
Counter-plan product for safety	PQ	143	105°C Long life 10,000 hours, miniature size	200 to 450	33 to 220	Black	105°C 10,000
	NEW MZ	145	Low ESR, High ripple current , Ultra miniature size	200 to 450	18 to 270	Black	105°C 2,000
	NEW MA	147	Low ESR , Long life, Ultra miniature size	400 to 450	33 to 120	Black	105°C 5,000
Capacitor For Over Voltage Application	NEW MQ	149	Low ESR, High ripple current,, Long life, Ultra miniature size	200 to 450	33 to 220	Black	105°C 10,000
	SW	151	High ripple current, Miniaturized	160 to 450	22 to 680	Black	105°C 2,000
	SQ	153	High ripple current, Long life 5,000 hours	160 to 450	22 to 680	Black	105°C 5,000
	SP	155	High ripple current, Long life 10,000 hours	160 to 450	22 to 680	Black	105°C 10,000
	VW	157	High ripple current, Miniaturized	160 to 450	22 to 680	Black	105°C 2,000
	VQ	159	High ripple current, Long life 5,000 hours	160 to 450	22 to 680	Black	105°C 5,000
	VJ	161	High ripple current, Long life 10,000 hours	160 to 450	22 to 680	Black	105°C 10,000

ALUMINUM ELECTROLYTIC CAPACITORS



◆ SNAP-IN TYPE

Series		Pags	Features	Voltage Range (Vdc)	Capacitance Range (μF)	Sleeve Color	Temperature Endurance (Hours)
General Purpose	GM	164	General , Standard	16 to 500	56 to 68,000	Dark Blue	85℃ 2,000
	GM	168	Downsize	200 to 450	82 to 1,000	Dark Blue	85℃ 2,000
	GR	169	General , Downsize	350 to 450	82 to 680	Black	85℃ 2,000
	GSF	171	General , Long life	200 to 450	68 to 2,200	Dark Blue	85℃ 3,000
	GVF	173	High ripple current , Load life	200 to 500	56 to 2,200	Dark Blue	85℃ 5,000
	PM	176	General , High temperature	16 to 450	56 to 68,000	Black	105℃ 1,000
	PL	179	General, High temperature, Long life	16 to 500	39 to 47,000	Black	105℃ 2,000
	PK	183	High temperature , Long life	200 to 450	56 to 1,800	Black	105℃ 3,000
	PT	185	General, High temperature , Long life	200 to 400	68 to 1,000	Black	105℃ 4,000
	PG	187	Smaller size with higher ripple current	200 to 500	47 to 1,800	Black	105℃ 5,000
Server product	PO	190	Snap-in terminal, more downsized	400 to 450	68 to 680	Black	105℃ 2,000
	PI	192	Snap-in terminal, downsized	400 to 450	56 to 680	Black	105℃ 3,000
High reliability	TG	194	The double waist products, Long life	10 to 100	680 to 47,000	Black	125℃ 5,000
Horizontal	GD	197	General , Standard , Horizontal mounting	160 to 450	82 to 1,200	Dark Blue	85℃ 2,000
	PX	199	High temperature, Horizontal mounting	160 to 450	68 to 1,500	Black	105℃ 2,000



◆ SPECIAL TYPE

Series		Pags	Features	Terminal Type	Voltage Range (Vdc)	Capacitance Range (μF)	Sleeve Color	Temperature Endurance (Hours)
Frequency conversion	AQ	203	For Power Supply and Air-Conditioner	HU	400 to 450	330 to 820	Dark Blue	85℃ 3,000
	AN	205	For Power Supply and Air-Conditioner	AC	400 to 450	800 to 3,300	Black	85℃ 3,000
Screw General Purpose	SC	207	Standard	Screw	200 to 600	820 to 33,000	Black	85℃ 2,000
	SA	210	Long life	Screw	160 to 450	1,000 to 68,000	Black	85℃ 5,000
	SL	213	High ripple current , Long life	Screw	200 to 400	1,000 to 39,000	Black	85℃ 20,000
	SK	216	High temperature , Long life	Screw	200 to 400	1,000 to 39,000	Black	105℃ 2,000
	SX	219	High temperature , Long life	Screw	200 to 400	1,000 to 39,000	Black	105℃ 5,000

Type	Part Number	Dimensions (Unit: mm)																														
		ΦD	F	t	L (Part number for lead length and pitch for tapping)																											
					Z	2	B	E	G	M	Q	S	T	F	H	3	C	D	4	5	6	7	I	8	J	9	K	A	L			
					2.0	2.5	2.8	3.1	3.3	3.5	3.6	1.0	3.8	14.8	12	3.5	3.8	4.0	4.5	5.0	6.3	7.0	7.5	8.0	8.5	9.0	9.5	10	10.5			
+0.3 / -0.2							±0.3					±0.5																				
Cut	C	4	1.5	----																										Fig 1		
		5	2.0	----																												
		6.3	2.5	----																												
		8	3.5	----																												
		10	5.0	----																												
		12.5	5.0	----																												
		16	7.5	----																												
		18	7.5	----																												
		20	10	----																												
		22	10	----																												
Kink & Cut	B	4	5.0	1.1																										Fig 2		
		5	5.0	1.1																												
		6.3	5.0	1.1																												
		8	5.0	1.3																												
				10	5.0	1.3																										
				12.5	5.0	1.3																										
				16	7.5	1.3																										
				18	7.5	1.3																										
Form & Cut	D	8	2.5	----																										Fig 3		
	F	4	5.0	----																										Fig 4		
		5	5.0	----																												
		6.3	5.0	----																												
		8	5.0	----																												

Type	Part Number	Dimensions (Unit: mm)																											
		ΦD	F	ι	L (Part number for lead length and pitch for tapping)																								
					Z	2	B	E	G	M	Q	S	T	F	H	3	C	D	4	5	6	7	I	8	J	9	K	A	L
					2.0	2.5	2.8	3.1	3.3	3.5	3.6	1.0	3.8	14.8	12	3.5	3.8	4.0	4.5	5.0	6.3	7.0	7.5	8.0	8.5	9.0	9.5	10	10.5
+0.3 / -0.2							±0.3					±0.5																	
Form & Cut	L	5	2.0	2.5																									Fig 5
		6.3	2.5	2.5																									
		8	3.5	2.5																									
		10	5.0	2.5																									
		12.5	5.0	2.5																									
		16	7.5	2.5																									
		18	7.5	2.5																									
	T	5	2.0	1.5																									Fig 6
		6.3	2.5	1.5																									
		8	3.5	1.5																									
		10	5.0	1.5																									
		12.5	5.0	1.5																									
		16	7.5	1.5																									
		18	7.5	1.5																									
	R	5	2.0	1.5																									Fig 7
		6.3	2.5	1.5																									
		8	3.5	1.5																									
		10	5.0	1.5																									
		12.5	5.0	1.5																									
		16	7.5	1.5																									
		18	7.5	1.5																									
	S	5	2.0	2.5																									Fig 8
		6.3	2.5	2.5																									
		8	3.5	2.5																									
10		5.0	2.5																										
12.5		5.0	2.5																										
16		7.5	2.5																										
18		7.5	2.5																										
E	5	2.0	----																									Fig 9	
	6.3	2.5	----																										
	8	3.5	----																										
	10	5.0	----																										
	12.5	5.0	----																										
	16	7.5	----																										
	18	7.5	----																										

◆ TAPING

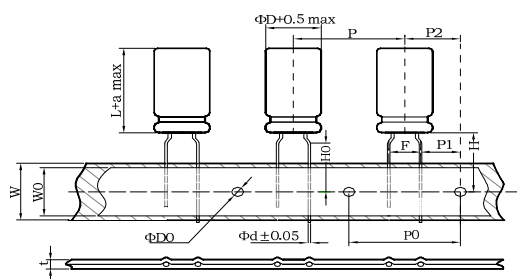


FIG 10- I

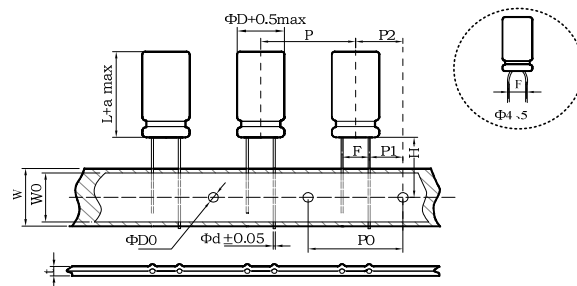


FIG 10- II

Item	Symbol	Tolerance	Formed Lead Type (10- I)						
			Φ 4×5 Φ 4×7	Φ 5×5 Φ 5×7	Φ 6.3×5	Φ 6.3×7	Φ 5×11 Φ 6.3×11	Φ 8×5 Φ 8×7 Φ 8×9	Φ 8×11.5 Φ 8×15 Φ 8×20
Lead wire diameter	Φd	±0.05	0.45	0.45	0.45	0.45	0.5	0.45/0.5	0.6
Pitch of component	P	±1.0	12.7	12.7	12.7	12.7	12.7	12.7	12.7
Feed hole pitch	P0	±0.2	12.7	12.7	12.7	12.7	12.7	12.7	12.7
Hole center to lead	P1	±0.5	3.85	3.85	3.85	3.85	3.85	3.85	3.85
Feed hole center to component center	P2	±1.0	6.35	6.35	6.35	6.35	6.35	6.35	6.35
Lead-to-lead distance	F	+ 0.8/-0.2	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Height of component from tape center	H	±0.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
Lead wire clinch height	H0	±0.5	16.0	16.0	16.0	16.0	16.0	16.0	16.0
Tape width	W	±0.5	18.0	18.0	18.0	18.0	18.0	18.0	18.0
Hole down tape width	W0	Min	12.5	12.5	12.5	12.5	12.5	12.5	12.5
Feed hole diameter	ΦD0	±0.2	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Total tape thickness	t	±0.2	0.7	0.7	0.7	0.7	0.7	0.7	0.7

Item	Symbol	Tolerance	Straight Lead Type (10- II)						
			Φ 4	Φ 5	Φ 6.3	Φ 8	Φ 10	Φ 12.5	Φ 16
Lead wire diameter	Φd	±0.05	0.45	0.5	0.5	0.6	0.6	0.6	0.8
Pitch of component	P	±1.0	12.7	12.7	12.7	12.7	12.7	15.0	30.0
Feed hole pitch	P0	±0.2	12.7	12.7	12.7	12.7	12.7	15.0	15.0
Hole center to lead	P1	±0.5	5.6	5.35	5.1	4.6	3.85	5.0	3.75
Feed hole center to component center	P2	±1.0	6.35	6.35	6.35	6.35	6.35	7.5	7.5
Lead-to-lead distance	F	+ 0.8/-0.2	2.5	2.5	2.5	3.5	5.0	5.0	7.5
Height of component from tape center	H	±0.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
Tape width	W	±0.5	18.0	18.0	18.0	18.0	18.0	18.0	18.0
Hole down tape width	W0	Min	12.5	12.5	12.5	12.5	12.5	12.5	12.5
Feed hole diameter	ΦD0	±0.2	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Total tape thickness	t	±0.2	0.7	0.7	0.7	0.7	0.7	0.7	0.7

ALUMINUM ELECTROLYTIC CAPACITORS



PART NUMBER SYSTEM (I)

◆ RADIAL LEAD TYPE

Series	Rated Voltage	Capacitance	Tolerance	Lead Forming Type	Lead Length	Case Dimension	Special Request
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)

(1) Series

Series	SS	SS-H	SB	SB-H	SF	LK	EM	ER	EH	EP	EC	ND
	ND-H	LB	LB-H	SM	PF	PW	EL	EB	ED	EK	EV	EJ
	EG	EY	RF	PY	TL	TD	TX	PC	LF	LL	PV	PJ
	KJ	KY	MW	MV	MJ	PZ	PA	PQ	MZ	MA	MQ	SW
	SQ	SP	VW	VQ	VJ							

(2) Rated Voltage

Code	0J	1A	1C	1E	1F	1V	1H	1J	1K	2A	2C	2Z	2D	2P	2E	2V	2G	2S	2W	2H
WV	6.3	10	16	25	30	35	50	63	80	100	160	180	200	220	250	350	400	420	450	500

(3) Capacitance

Code	R10	R47	010	4R7	100	470	101	471	102	472	473
μF	0.1	0.47	1.0	4.7	10	47	100	470	1000	4700	47000

(4) Capacitance Tolerance

Code	J	Q	R	K	V	M	H
%	± 5	+30 / -10	+20 / -0	± 10	+20 / -10	± 20	+20 / -5

(5) Lead Type

Code	N	C	B	D	F	L	T	R	S	E	P
Description	Long Lead	Cutting	Kink & Cutting	Forming & Cutting							Taping
Drawing	---	Fig 1	Fig 2	Fig 3	Fig 4	Fig 5	Fig 6	Fig 7	Fig 8	Fig 9	Fig 10

(6) Lead Length (Cut / Formed lead)

Code	Z	2	B	E	G	M	3	T	C	D	4	5	6
Length	2.0	2.5	2.8	3.1	3.3	3.5	3.5	3.8	3.8	4.0	4.5	5.0	6.3
Tolerance	+0.3/-0.2						±0.5	±0.3	±0.5				
Code	7	I	8	J	9	K	A	L	F	S	H	Q	N
Length	7.0	7.5	8.0	8.5	9.0	9.5	10	10.5	14.8	1.0	12	3.6	◎19mm min
Tolerance	±0.5							±0.3	±1.0	+0.3/-0.2	◎15mm min		

Taping Code

Code	Z	2	3	5	I
Lead Pitch: +0.8/-0.2	2.0	2.5	3.5	5.0	7.5

(7) Case Dimension

Code	0407	0511	6311	08B5	10C5	1016	1225	16N3	16P1	18N3	18P1	1840
Size	04x07	05x11	6.3x11	08x11.5	10x12.5	10x16	12.5x25	16x31.5	16x35.5	18x31.5	18x35.5	18x40

(8) Special Request

Code	R	F	L	D
Description	High Rated ripple current	Endurance	Low Leakage Current	Low Dissipation Factor
Code	H	E	P	---
Description	High Temperature	Low Impedance & ESR	PET Sleeve	---

SS & SS-H Series


- **Standard miniature series with 7mm height at 85 °C & 105 °C**



◆ SPECIFICATIONS

Item	Performance Characteristics																							
Series	SS				SS-H																			
Category Temperature Range	-40 ~ +85℃				-40 ~ +105℃																			
Working Voltage Range	6.3 ~ 63 Vdc																							
Capacitance Range	0.1 ~ 330 μF																							
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																							
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>tanδ(Max)</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.10</td></tr></table>								Rated Voltage (V)	6.3	10	16	25	35	50	63	tanδ(Max)	0.24	0.20	0.16	0.14	0.12	0.10	0.10
	Rated Voltage (V)	6.3	10	16	25	35	50	63																
	tanδ(Max)	0.24	0.20	0.16	0.14	0.12	0.10	0.10																
The above values should be increased by 0.02 for every additional 1000μF																								
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																							
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>10</td><td>8</td><td>6</td><td>4</td><td>4</td><td>3</td><td>3</td></tr></table> (at 120Hz)								Rated voltage (V)	6.3	10	16	25	35	50	63	Z(-40℃)/Z(+20℃)	10	8	6	4	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63																	
Z(-40℃)/Z(+20℃)	10	8	6	4	4	3	3																	
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 85℃(SS), or 1,000 hours at 105℃(SS-H). <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>								Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value										
Capacitance change	≒ ±25% of the initial value																							
Dissipation factor(tanδ)	≒ 200% of the specified value																							
Leakage current	≒ specified value																							
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 85℃(SS), or 500 hours at 105℃(SS-H) without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>								Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value										
Capacitance change	≒ ±25% of the initial value																							
Dissipation factor(tanδ)	≒ 200% of the specified value																							
Leakage current	≒ 200% of the specified value																							
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																							

◆ **DIMENSIONS (mm)**

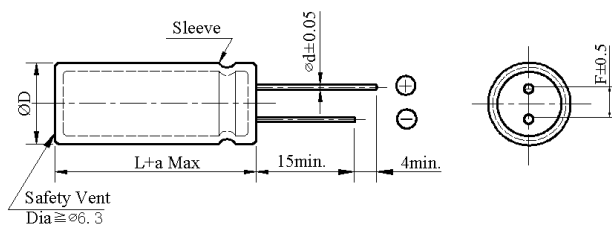

ΦD	4	5	6.3	8×7
ΦD	ΦD + 0.5 Max			
Φd	0.45	0.45	0.45	0.45
F	1.5	2.0	2.5	3.5
a	L + 1.0 Max			

◆ **PART NUMBER SYSTEM(Example : 35V 22μF)**

S	S	1	V	2	2	0	M	N	N	0	5	0	7						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(0507 : 5×7)

Lead length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (22μF)

Voltage code (35V)

Series code (SS)

ALUMINUM ELECTROLYTIC CAPACITORS



SS Series

◆ Case size & Permissible rated ripple current: (mA rms) at 85°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1								
0.22								
0.33								
0.47								
1.0								
2.2								
3.3								
4.7							4×7	24
10					4×7	28	4×7	30
22	4×7	34	4×7	38	4×7	39	4×7	46
33	4×7	40	4×7	41	4×7	45	5×7	57
47	4×7	44	4×7	47	5×7	61	6.3×7	66
100	5×7	69	5×7	73	6.3×7	92	8×7	95
220	6.3×7	120	6.3×7	125	8×7	138		
330	8×7	150	8×7	155				

uF \ Vdc	35		50		63	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1			4×7	2	4×7	4
0.22			4×7	2	4×7	4
0.33			4×7	3.5	4×7	4
0.47			4×7	5	4×7	6
1.0			4×7	10	4×7	13
2.2			4×7	19	4×7	21
3.3			4×7	24	4×7	26
4.7	4×7	24	4×7	26	5×7	33
10	5×7	32	5×7	40	6.3×7	45
22	5×7	51	6.3×7	60	8×7	68
33	6.3×7	60	8×7	62		
47	6.3×7	72	8×7	75		
100	8×7	98				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	1K	10K	100K
6.3 ~ 25	0.75	1.00	1.10	1.13	1.20
35 ~ 63	0.80	1.00	1.15	1.20	1.25

SS-H Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1								
0.22								
0.33								
0.47								
1.0								
2.2								
3.3								
4.7							4×7	15
10					4×7	28	4×7	29
22	4×7	34	4×7	35	4×7	37	4×7	45
33	4×7	39	4×7	40	4×7	42	5×7	47
47	4×7	40	4×7	41	5×7	60	6.3×7	61
100	5×7	65	5×7	70	6.3×7	90	8×7	92
220	6.3×7	100	6.3×7	102	8×7	105		
330	8×7	130	8×7	135				

uF \ Vdc	35		50		63	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1			4×7	1	4×7	1
0.22			4×7	2	4×7	2
0.33			4×7	3	4×7	4
0.47			4×7	5	4×7	6
1.0			4×7	10	4×7	13
2.2			4×7	19	4×7	21
3.3			4×7	24	4×7	26
4.7	4×7	20	4×7	29	5×7	33
10	5×7	30	5×7	32	6.3×7	35
22	5×7	47	6.3×7	50	8×7	52
33	6.3×7	52	8×7	62		
47	6.3×7	62	8×7	70		
100	8×7	93				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	1K	10K	100K
6.3 ~ 25	0.75	1.00	1.10	1.13	1.20
35 ~ 63	0.80	1.00	1.15	1.20	1.25

ALUMINUM ELECTROLYTIC CAPACITORS



SB & SB-H Series


- Standard miniature series with 5mm height at 85 °C & 105°C



SPECIFICATIONS

Item	Performance Characteristics							
Series	SB					SB-H		
Category Temperature Range	-40 ~ +85℃					-40 ~ +105℃		
Working Voltage Range	4 ~ 50 Vdc							
Capacitance Range	0.1 ~ 470 μF							
Capacitance Tolerance	±20% (at 25℃ and 120Hz)							
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	4	6.3	10	16	25	35	50
	tanδ(Max)	0.37	0.28	0.22	0.18	0.16	0.14	0.12
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes							
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	4	6.3	10	16	25	35	50
	Z(-40℃)/Z(+20℃)	15	8	8	6	4	4	3
Endurance	(at 120Hz)							
	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 85℃(SB), or 1,000 hours at 105℃(SB-H).							
	Capacitance change		≒ ±25% of the initial value (4V:≒±30%)					
	Dissipation factor(tanδ)		≒ 200% of the specified value					
Shelf Life	Leakage current		≒ specified value					
	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 85℃(SB), or 500 hours at 105℃(SB-H) without voltage applied.							
	Capacitance change		≒ ±25% of the initial value					
Others	Dissipation factor(tanδ)		≒ 200% of the specified value					
	Leakage current		≒ 200% of the specified value					
	Conforms to JIS-C-5101-4 (1998), characteristic W							

DIMENSIONS (mm)

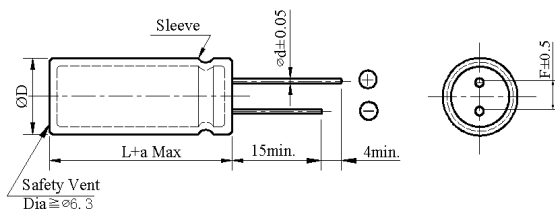

ΦD	4	5	6.3	8×5
ΦD	ΦD + 0.5 Max			
Φd	0.45	0.45	0.45	0.45
F	1.5	2.0	2.5	3.5
a	L + 1.0 Max			

PART NUMBER SYSTEM(Example : 50V 0.47µF)

S	B	1	H	R	4	7	M	N	N	0	4	0	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(0405 : 4×5)

Lead length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (0.47µF)

Voltage code (50V)

Series code (SB)

SB Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C/120Hz

uF \ Vdc	4		6.3		10		16	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1								
0.22								
0.33								
0.47								
1.0								
2.2								
3.3								
4.7								
10								
22							4×5	32
33					5×5	38	5×5	42
47	5×5	35	5×5	41	5×5	45	6.3×5	58
100	6.3×5	63	6.3×5	70	6.3×5	73	6.3×5	80
220	6.3×5	70	6.3×5	95	8×5	120	8×5	125
330	8×5	80	8×5	150				
470	8×5	150						

uF \ Vdc	25		35		50	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1					4×5	1
0.22					4×5	2
0.33					4×5	2.8
0.47					4×5	4
1.0					4×5	8.4
2.2					4×5	13
3.3					4×5	17
4.7			4×5	18	5×5	20
10	4×5	24	5×5	29	6.3×5	33
22	5×5	37	6.3×5	46	8×5	55
33	6.3×5	45	6.3×5	50	8×5	65
47	6.3×5	60	8×5	68		
100	8×5	90				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	1K	10K	100K
4 ~ 25	0.75	1.00	1.10	1.13	1.20
35 ~ 50	0.80	1.00	1.15	1.20	1.25

ALUMINUM ELECTROLYTIC CAPACITORS



SB-H Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	4		6.3		10		16	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1								
0.22								
0.33								
0.47								
1.0								
2.2								
3.3								
4.7								
10								
22							4×5	22
33					5×5	33	5×5	37
47	5×5	30	5×5	32	5×5	35	6.3×5	50
100	6.3×5	60	6.3×5	60	6.3×5	62	6.3×5	65
220	6.3×5	65	6.3×5	72	8×5	92	8×5	96
330	8×5	70	8×5	105				
470	8×5	105						

uF \ Vdc	25		35		50	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.1					4×5	0.8
0.22					4×5	1.6
0.33					4×5	2.2
0.47					4×5	3.5
1.0					4×5	6.0
2.2					4×5	11
3.3					4×5	14
4.7			4×5	15	5×5	18
10	4×5	18	5×5	22	6.3×5	28
22	5×5	25	6.3×5	38	8×5	42
33	6.3×5	40	6.3×5	45		
47	6.3×5	54	8×5	60		
100	8×5	70				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	1K	10K	100K
4 ~ 25	0.75	1.00	1.10	1.13	1.20
35 ~ 50	0.80	1.00	1.15	1.20	1.25

- Load life: 105°C 2,000 hours, 7mm height
- Design for space-saving and high density insertion
- Applications: VTR, car radio, car stereos, charger, etc.




Item	Performance Characteristics																
Category Temperature Range	-40 ~ +105℃																
Working Voltage Range	6.3 ~ 63Vdc																
Capacitance Range	0.1 ~ 220 μF																
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr> <tr> <td>tanδ(Max)</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td></tr> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	63	tanδ(Max)	0.24	0.20	0.16	0.14	0.12	0.10	0.09
Rated Voltage (V)	6.3	10	16	25	35	50	63										
tanδ(Max)	0.24	0.20	0.16	0.14	0.12	0.10	0.09										
Leakage Current	$I \leq 0.01CV$ or 3 μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 1 minute																
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr> <tr> <td>Z(-40℃)/Z(+20℃)</td><td>10</td><td>6</td><td>5</td><td>4</td><td>4</td><td>3</td><td>3</td></tr> </table> (at 120Hz)	Rated voltage (V)	6.3	10	16	25	35	50	63	Z(-40℃)/Z(+20℃)	10	6	5	4	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63										
Z(-40℃)/Z(+20℃)	10	6	5	4	4	3	3										
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 2,000 hours at 105℃. <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 200\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq$ specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	Dissipation factor(tanδ)	$\leq 200\%$ of the specified value	Leakage current	$\leq$ specified value										
Capacitance change	$\leq \pm 20\%$ of the initial value																
Dissipation factor(tanδ)	$\leq 200\%$ of the specified value																
Leakage current	$\leq$ specified value																
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>$\leq \pm 20\%$ of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>$\leq 200\%$ of the specified value</td></tr> <tr> <td>Leakage current</td><td>$\leq 200\%$ of the specified value</td></tr> </table>	Capacitance change	$\leq \pm 20\%$ of the initial value	Dissipation factor(tanδ)	$\leq 200\%$ of the specified value	Leakage current	$\leq 200\%$ of the specified value										
Capacitance change	$\leq \pm 20\%$ of the initial value																
Dissipation factor(tanδ)	$\leq 200\%$ of the specified value																
Leakage current	$\leq 200\%$ of the specified value																
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																

Technical drawing of a sleeve with the following dimensions and tolerances:

- Outer Diameter: ϕD
- Length: $L+a$ Max
- Inner Diameter: $\phi d \pm 0.05$
- Minimum Length: 15min.
- Minimum Diameter: $\phi \geq \phi 6.3$
- Feature: Safety Vent
- Feature: Sleeve

ΦD	4	5	6.3	8×7
ΦD	ΦD + 0.5 Max			
Φd	0.45			
F	1.5	2.0	2.5	3.5
a	L + 1.0 Max			

S	F	0	J	1	0	1	M	N	N	6	3	0	7						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

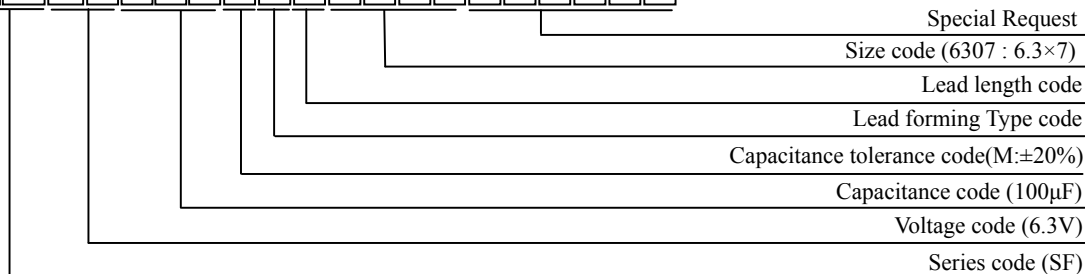

ALUMINUM ELECTROLYTIC CAPACITORS



SF Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
4.7							4×7	17
6.8					4×7	16	4×7	19
10					4×7	28	4×7	28
							5×7	33
15			4×7	26	4×7	30	5×7	35
22	4×7	28	4×7	32	4×7	35	5×7	43
					5×7	42	6.3×7	45
33	4×7	32	5×7	48	5×7	50	6.3×7	62
	5×7	35						
47	5×7	47	5×7	51	6.3×7	67	8×7	75
68	5×7	50	6.3×7	68	6.3×7	70	8×7	80
					8×7	78		
100	6.3×7	75	6.3×7	80	8×7	110	8×7	115
			8×7	95				
220	8×7	92	8×7	130				

uF \ Vdc	35		50		63	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
0.1			4×7	1.5	4×7	1.5
0.15			4×7	1.8	4×7	1.8
0.22			4×7	2.5	4×7	2.5
0.33			4×7	3.5	4×7	3.5
0.47			4×7	5	4×7	6
0.68			4×7	7	4×7	7
1			4×7	10	4×7	12
1.5			4×7	13	4×7	14
2.2			4×7	20	4×7	20
3.3			4×7	26	5×7	28
4.7	4×7	22	4×7	27	5×7	29
			5×7	29	6.3×7	33
6.8	4×7	24	5×7	32	6.3×7	35
	5×7	28	6.3×7	33		
10	5×7	35	6.3×7	38	6.3×7	40
15	5×7	38	6.3×7	52	8×7	55
	6.3×7	45				
22	6.3×7	60	8×7	63	8×7	65
33	6.3×7	50	8×7	78		
	8×7	68				
47	8×7	80				
68	8×7	85				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)					
		50/60	120	400	1K	10K	50K-100K
6.3 ~ 63	CAP ≤ 10	0.80	1.00	1.30	1.45	1.65	1.70
	100 < CAP ≤ 220	0.80	1.00	1.23	1.36	1.36	1.53

- **Downsize and high ripple current**
- **Load life: 4,000 hours at 105°C**



Item	Performance Characteristics						
Category Temperature Range	-25 ~ +105℃						
Working Voltage Range	160 ~ 200Vdc						
Capacitance Range	22 ~ 39 μF						
Capacitance Tolerance	±20% (at 25℃ and 120Hz)						
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>160</td><td>200</td></tr> <tr> <td>tanδ(Max)</td><td>0.15</td><td>0.15</td></tr> </table> The above values should be increased by 0.02 for every additional 1000μF	Rated Voltage (V)	160	200	tanδ(Max)	0.15	0.15
Rated Voltage (V)	160	200					
tanδ(Max)	0.15	0.15					
Leakage Current	I=0.03CV+10uA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes						
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>160</td><td>200</td></tr> <tr> <td>Z(-25℃)/Z(+20℃)</td><td>3</td><td>3</td></tr> </table> (at 120Hz)	Rated voltage (V)	160	200	Z(-25℃)/Z(+20℃)	3	3
Rated voltage (V)	160	200					
Z(-25℃)/Z(+20℃)	3	3					
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 4,000 hours at 105℃. <table border="1"> <tr> <td>Capacitance change</td><td>≧ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≧ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≧ specified value</td></tr> </table>	Capacitance change	≧ ±20% of the initial value	Dissipation factor(tanδ)	≧ 200% of the specified value	Leakage current	≧ specified value
Capacitance change	≧ ±20% of the initial value						
Dissipation factor(tanδ)	≧ 200% of the specified value						
Leakage current	≧ specified value						
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≧ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≧ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≧ 200% of the specified value</td></tr> </table>	Capacitance change	≧ ±20% of the initial value	Dissipation factor(tanδ)	≧ 200% of the specified value	Leakage current	≧ 200% of the specified value
Capacitance change	≧ ±20% of the initial value						
Dissipation factor(tanδ)	≧ 200% of the specified value						
Leakage current	≧ 200% of the specified value						
Others	Conforms to JIS-C-5101-4 (1998), characteristic W						

Technical drawing of a Safety Vent assembly. The side view shows a cylindrical body with a diameter $\varnothing D$ and a length $L+a$ Max. A sleeve is shown with a diameter $\varnothing d \pm 0.05$. The distance from the end of the sleeve to the center of the vent is 15 min. The distance from the center of the vent to the end of the body is 4 min. The end view shows a circular cross-section with a diameter $F \pm 0.5$ and two small circular features.

ΦD	12.5 × 12
ΦD	ΦD + 0.5 Max
Φd	0.6
F	5.0
a	L + 1.0 Max

Diagram illustrating the marking code structure for a capacitor:

Digit	Meaning
L	Series code (LK)
K	
2	Voltage code (160V)
C	
3	Capacitance code (33µF)
3	
0	
M	Capacitance tolerance code (M: ± 20%)
N	
N	
1	
2	
2	Lead length code
1	
2	
(Empty)	Lead forming Type code
(Empty)	
(Empty)	
(Empty)	
(Empty)	
(Empty)	Size code (1212 : 12.5×12)
(Empty)	
(Empty)	
(Empty)	
(Empty)	

LK Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

Nominal capacitance (uF)	160V		200V	
	ΦD×L	RC	ΦD×L	RC
22			12.5×12	250
27			12.5×12	270
33	12.5×12	180		
39	12.5×12	200		

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
160 ~ 200	22 ~ 39	0.80	1.00	1.40	1.40	1.40

Two electrolytic capacitors are shown, each labeled "220µF 25V". They are dark blue with silver leads.


- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

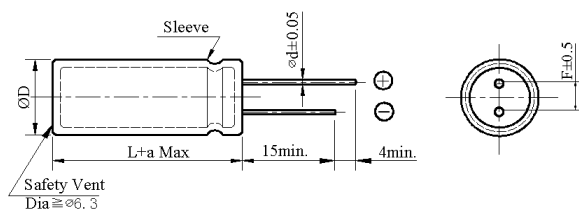

ΦD	8 × 7	8 × 9
ΦD	ΦD + 0.5 Max	
Φd	0.45	0.50
F	3.5	
a	L + 1.0 Max	

E	M	1	E	2	2	1	M	N	N	0	8	0	9					
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--

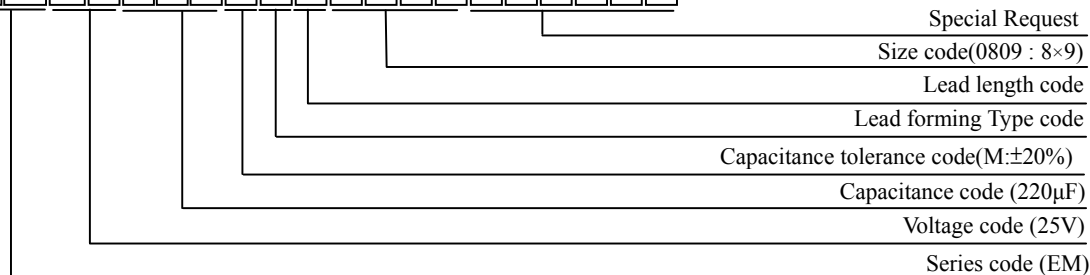

EM Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	6.3V			10V			16V		
	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
100							8×7	0.240	330
150	8×7	0.230	305	8×7	0.210	315	8×7	0.150	385
220	8×7	0.150	380	8×7	0.140	390	8×7	0.130	405
330	8×7	0.140	405	8×9	0.130	465	8×9	0.120	505
470	8×9	0.130	465	8×9	0.120	480	8×9	0.110	535

Nominal Capacitance (uF)	25V			30V			35V		
	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
33	8×7	0.360	215				8×7	0.300	250
47	8×7	0.280	250				8×7	0.230	310
56	8×7	0.230	310				8×7	0.160	380
68	8×7	0.190	330				8×7	0.150	400
100	8×7	0.150	380				8×7	0.140	420
150	8×7	0.140	465	8×7	0.130	680	8×9	0.120	700
180	8×9	0.120	760	8×9	0.110	765			
220	8×9	0.100	800						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K ≤ 200K
6.3 ~ 35	33 ~ 82	0.50	0.80	0.98	1.00
	100 ~ 470	0.55	0.85	0.95	1.00

- **Low impedance, high ripple current and miniature size with 7 to 9 mm height**



Item	Performance Characteristics												
Category Temperature Range	-40 ~ +105℃												
Working Voltage Range	6.3 ~ 35Vdc												
Capacitance Range	33 ~ 470 μF												
Capacitance Tolerance	±20% (at 25℃ and 120Hz)												
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr> <tr> <td>tanδ(Max)</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.14</td></tr> </table>	Rated Voltage (V)	6.3	10	16	25	35	tanδ(Max)	0.24	0.20	0.16	0.14	0.14
Rated Voltage (V)	6.3	10	16	25	35								
tanδ(Max)	0.24	0.20	0.16	0.14	0.14								
Leakage Current	I=0.01CV or 3 μA, whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes												
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr> <tr> <td>Z(-40℃)/Z(+20℃)</td><td>8</td><td>6</td><td>6</td><td>5</td><td>4</td></tr> </table> (at 120Hz)	Rated voltage (V)	6.3	10	16	25	35	Z(-40℃)/Z(+20℃)	8	6	6	5	4
Rated voltage (V)	6.3	10	16	25	35								
Z(-40℃)/Z(+20℃)	8	6	6	5	4								
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 3,000 hours at 105℃. <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±25% of the initial value(6.3V、10V: ≒ ±30%)</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ specified value</td></tr> </table>	Capacitance change	≒ ±25% of the initial value(6.3V、10V: ≒ ±30%)	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value						
Capacitance change	≒ ±25% of the initial value(6.3V、10V: ≒ ±30%)												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ specified value												
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±25% of the initial value(6.3V、10V: ≒ ±30%)</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ 200% of the specified value</td></tr> </table>	Capacitance change	≒ ±25% of the initial value(6.3V、10V: ≒ ±30%)	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value						
Capacitance change	≒ ±25% of the initial value(6.3V、10V: ≒ ±30%)												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ 200% of the specified value												
Others	Conforms to JIS-C-5101-4 (1998), characteristic W												

Technical drawing of a sleeve assembly. The drawing shows a side view and a top view.

Side View:


- Sleeve:** The main component, with an outer diameter labeled $\varnothing D$.
- Insert:** A rod or pin passing through the sleeve, with a diameter labeled $\varnothing d \pm 0.05$.
- Length:** The total length of the assembly is labeled $L+a \text{ Max}$.
- Distances:** The distance from the end of the sleeve to the end of the insert is labeled 15 min. . The distance from the end of the insert to the end of the sleeve is labeled 4 min. .
- Safety Vent:** A feature on the sleeve, with a diameter labeled $\text{Dia} \geq \varnothing 6.3$.

Top View:

- Outer Diameter:** The diameter of the sleeve is labeled $F \pm 0.5$.

ΦD	8×7	8×9
ΦD	$\Phi D + 0.5 \text{ Max}$	
dΦ	0.45	0.50
F	3.5	
a	L+ 1.0 Max	

E	R	1	E	2	2	1	M	N	N	0	8	0	9				
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--

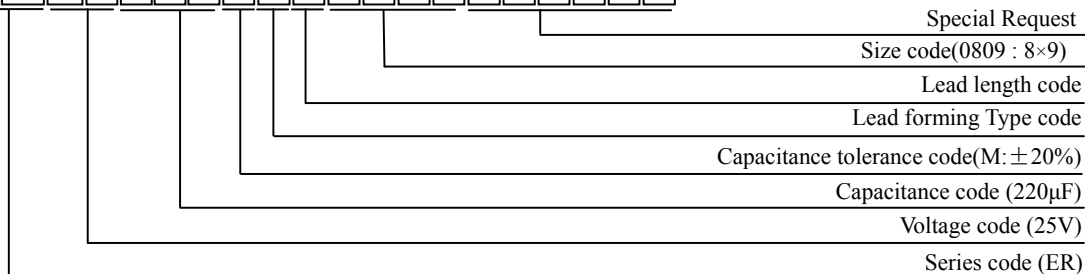

ALUMINUM ELECTROLYTIC CAPACITORS



ER Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	6.3V			10V			16V		
	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
100							8×7	0.240	330
150	8×7	0.230	305	8×7	0.210	315	8×7	0.150	385
220	8×7	0.150	380	8×7	0.140	390	8×7	0.130	405
330	8×7	0.140	405	8×9	0.130	465	8×9	0.120	505
470	8×9	0.130	465	8×9	0.120	480	8×9	0.110	535

Nominal Capacitance (uF)	25V			30V			35V		
	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
33	8×7	0.360	215				8×7	0.300	250
47	8×7	0.280	250				8×7	0.230	310
56	8×7	0.230	310				8×7	0.160	380
68	8×7	0.190	330				8×7	0.150	400
100	8×7	0.150	380				8×7	0.140	420
150	8×7	0.140	465	8×7	0.130	680	8×9	0.120	700
180	8×9	0.120	760	8×9	0.110	765			
220	8×9	0.100	800						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K ≤ 200K
6.3 ~ 35	33 ~ 82	0.50	0.80	0.98	1.00
	100 ~ 470	0.55	0.85	0.95	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



EH Series


- Low impedance and High ripple current.
- Load life 3,000~4,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics												
Category Temperature Range	-55~ +105℃												
Working Voltage Range	10 ~ 35Vdc												
Capacitance Range	150 ~820 μF												
Capacitance Tolerance	±20% (at 25℃ and 120Hz)												
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>tanδ(Max)</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td></tr></table> The above values should be increased by 0.02 for every additional 1000μF	Rated Voltage (V)	10	16	25	35	tanδ(Max)	0.19	0.16	0.14	0.12		
Rated Voltage (V)	10	16	25	35									
tanδ(Max)	0.19	0.16	0.14	0.12									
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes												
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table> (at 120Hz)	Rated voltage (V)	10	16	25	35	Z(-55℃)/Z(+20℃)	3	3	3	3		
Rated voltage (V)	10	16	25	35									
Z(-55℃)/Z(+20℃)	3	3	3	3									
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 3,000 to 4,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td><td>Size</td><td>Life time (hours)</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td><td>10Φ</td><td>3,000</td></tr><tr><td>Leakage current</td><td>≒ specified value</td><td>12.5Φ</td><td>4,000</td></tr></table>	Capacitance change	≒ ±25% of the initial value	Size	Life time (hours)	Dissipation factor(tanδ)	≒ 200% of the specified value	10Φ	3,000	Leakage current	≒ specified value	12.5Φ	4,000
Capacitance change	≒ ±25% of the initial value	Size	Life time (hours)										
Dissipation factor(tanδ)	≒ 200% of the specified value	10Φ	3,000										
Leakage current	≒ specified value	12.5Φ	4,000										
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>	Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value						
Capacitance change	≒ ±25% of the initial value												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ 200% of the specified value												
Others	Conforms to JIS-C-5101-4 (1998), characteristic W												

DIMENSIONS (mm)

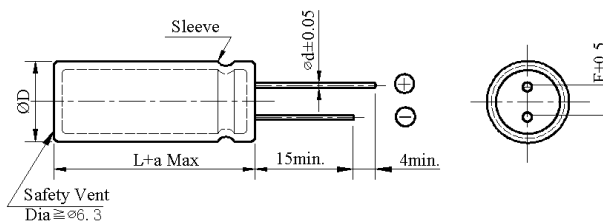

ΦD	10×9	12.5×9
ΦD	ΦD + 0.5 Max	
Φd	0.6	0.6
F	5.0	5.0
a	L + 1.0 Max	

PART NUMBER SYSTEM(Example : 10V 820µF)

E	H	1	A	8	2	1	M	N	N	1	2	0	9						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request	
Size code(1209 : 12.5×9)	
Lead length code	
Lead forming Type code	
Capacitance tolerance code(M:±20%)	
Capacitance code (820µF)	
Voltage code (10V)	
Series code (EH)	

EH Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	10V		16V		25V		35V	
	Case size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)
150							10×9	630
220							12.5×9	750
270					10×9	630		
390			10×9	640	12.5×9	700		
560	10×9	600	12.5×9	720				
820	12.5×9	750						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
10 ~ 35	150 ~ 270	0.30	0.50	0.80	0.95	1.00
	390 ~ 820	0.57	0.71	0.90	0.98	1.00

- Miniaturized, Low ESR and Low impedance
- Suitable for use in high ripple current capability
- Load life 4,000 hours at 105°C



Item	Performance Characteristics												
Category Temperature Range	-40 ~ +105℃												
Working Voltage Range	10 ~ 100Vdc												
Capacitance Range	68 ~1,800 μF												
Capacitance Tolerance	±20% (at 25℃ and 120Hz)												
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>100</td></tr> <tr> <td>tanδ(Max)</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.08</td></tr> </table> The above values should be increased by 0.02 for every additional 1000μF	Rated Voltage (V)	10	16	25	35	100	tanδ(Max)	0.19	0.16	0.14	0.12	0.08
Rated Voltage (V)	10	16	25	35	100								
tanδ(Max)	0.19	0.16	0.14	0.12	0.08								
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes												
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>100</td></tr> <tr> <td>Z(-40℃)/Z(+20℃)</td><td>6</td><td>6</td><td>5</td><td>4</td><td>3</td></tr> </table> (at 120Hz)	Rated voltage (V)	10	16	25	35	100	Z(-40℃)/Z(+20℃)	6	6	5	4	3
Rated voltage (V)	10	16	25	35	100								
Z(-40℃)/Z(+20℃)	6	6	5	4	3								
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 4,000 hours at 105℃ . <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ specified value</td></tr> </table>	Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value						
Capacitance change	≒ ±25% of the initial value												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ specified value												
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 500 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ 200% of the specified value</td></tr> </table>	Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value						
Capacitance change	≒ ±25% of the initial value												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ 200% of the specified value												
Others	Conforms to JIS-C-5101-4 (1998), characteristic W												

Technical drawing of the Safety Vent assembly. The side view shows a cylindrical body with a diameter of $\varnothing D$. A sleeve is attached to the top. The length of the body is $L+a$ Max. The sleeve has a diameter of $\varnothing D \pm 0.05$. The distance from the end of the body to the start of the sleeve is 15min. The distance from the end of the sleeve to the end of the body is 4min. The top view shows a circular cross-section with a diameter of $\varnothing 6.3$ and a central hole with a diameter of $\varnothing 6.3$. The top view also shows a central hole with a diameter of $\varnothing 6.3$ and a central hole with a diameter of $\varnothing 6.3$.

ΦD	12.5×12
ΦD	ΦD + 0.5 Max
Φd	0.6
F	5.0
a	L + 1.0 Max

E	P	1	V	4	7	1	M	N	N	1	2	1	2						
																		Special Request	
														Size code(1212 : 12.5×12)					
												Lead length code							
										Lead forming Type code									
								Capacitance tolerance code(M:±20%)											
						Capacitance code (470μF)													
				Voltage code (35V)															
																		Series code (EP)	

EP Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	10V		16V		25 V	
	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)
560					12.5×12	1150
680					12.5×12	1200
1000			12.5×12	1300		
1200			12.5×12	1400		
1500	12.5×12	1260				
1800	12.5×12	1300				

Nominal Capacitance (uF)	35V		100 V	
	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)
68			12.5×12	350
82			12.5×12	420
390	12.5×12	1050		
470	12.5×12	1100		

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
10 ~100	≥68	0.30	0.65	0.85	1.00
	82 ~ 220	0.50	0.70	0.90	1.00
	330 ~ 820	0.60	0.75	0.95	1.00
	1000 ~ 1800	0.70	0.80	0.98	1.00

EC Series


- Miniaturized, Low ESR and Low impedance
- Suitable for use in high ripple current capability
- Load life 5,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics																	
Category Temperature Range	-40 ~ +105℃																	
Working Voltage Range	10 ~ 100Vdc																	
Capacitance Range	68 ~1,800 μF																	
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																	
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>100</td></tr><tr><td>tanδ(Max)</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.08</td></tr></table>						Rated Voltage (V)	10	16	25	35	100	tanδ(Max)	0.19	0.16	0.14	0.12	0.08
Rated Voltage (V)	10	16	25	35	100													
tanδ(Max)	0.19	0.16	0.14	0.12	0.08													
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																	
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>100</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>6</td><td>6</td><td>5</td><td>4</td><td>3</td></tr></table> (at 120Hz)						Rated voltage (V)	10	16	25	35	100	Z(-40℃)/Z(+20℃)	6	6	5	4	3
Rated voltage (V)	10	16	25	35	100													
Z(-40℃)/Z(+20℃)	6	6	5	4	3													
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 5,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>						Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value						
Capacitance change	≒ ±25% of the initial value																	
Dissipation factor(tanδ)	≒ 200% of the specified value																	
Leakage current	≒ specified value																	
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 500 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>						Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value						
Capacitance change	≒ ±25% of the initial value																	
Dissipation factor(tanδ)	≒ 200% of the specified value																	
Leakage current	≒ 200% of the specified value																	
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																	

DIMENSIONS (mm)

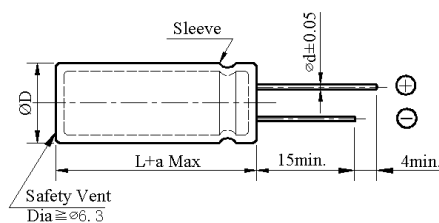

ΦD	12.5×12
ΦD	ΦD + 0.5 Max
Φd	0.6
F	5.0
a	L + 1.0 Max

PART NUMBER SYSTEM(Example : 35V 470µF)

E	C	1	V	4	7	1	M	N	N	1	2	1	2						
																			Special Request
																			Size code(1212 : 12.5×12)
																			Lead length code
																			Lead forming Type code
																			Capacitance tolerance code(M:±20%)
																			Capacitance code (470µF)
																			Voltage code (35V)
																			Series code (EC)

EC Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	10V		16V		25 V	
	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)
560					12.5×12	1150
680					12.5×12	1200
1000			12.5×12	1300		
1200			12.5×12	1400		
1500	12.5×12	1260				
1800	12.5×12	1300				

Nominal Capacitance (uF)	35V		100 V	
	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Max. Rated ripple current @105°C 100kHz (mA rms)
68			12.5×12	350
82			12.5×12	420
390	12.5×12	1050		
470	12.5×12	1100		

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
10 ~100	≥68	0.30	0.65	0.85	1.00
	82 ~ 220	0.50	0.70	0.90	1.00
	330 ~ 820	0.60	0.75	0.95	1.00
	1000 ~ 1800	0.70	0.80	0.98	1.00

- Standard non-polarized type
- Suitable for conditions where polarity reverses or where polarity is not constant
- ND series 85°C 2,000Hrs, ND-H series 105°C 1,000Hrs

[illegible]

The image shows two technical drawings of sleeves, labeled (05-06.3) and (05-06.3). Both drawings include a side view and a cross-sectional view.

Side View Details:

- Part (05-06.3):** Shows a sleeve with an outer diameter (O.D.) and a length of $L+a$ Max. The sleeve is connected to a shaft with a diameter of $\phi d \pm 0.05$. The shaft has a length of 15min. and a distance of 4min. from the sleeve end.
- Part (05-06.3):** Shows a similar sleeve with an outer diameter (O.D.) and a length of $L+a$ Max. The sleeve is connected to a shaft with a diameter of $\phi d \pm 0.05$. The shaft has a length of 15min. and a distance of 4min. from the sleeve end.

Cross-sectional View Details:

- Part (05-06.3):** Shows a cross-section of the sleeve with a diameter of $\phi d \pm 0.05$ and a length of 15min. The sleeve is connected to a shaft with a diameter of $\phi d \pm 0.05$.
- Part (05-06.3):** Shows a cross-section of the sleeve with a diameter of $\phi d \pm 0.05$ and a length of 15min. The sleeve is connected to a shaft with a diameter of $\phi d \pm 0.05$.

ΦD	5	6.3	8	10	12.5 L<35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$							$\Phi D + 0.5 \text{ Max}$
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$			L + 1.5 Max

The diagram shows a 16-bit register with the following fields: N, D, 2, E, 2, R, 2, M, N, N, 1, 0, 1, 2, and five empty boxes. Arrows indicate connections from these fields to various parts of a larger system diagram, including a 'Data' block, a 'Control' block, and a 'Memory' block.

ALUMINUM ELECTROLYTIC CAPACITORS



ND Series

◆ Case size & Permissible rated ripple current: (mA rms) at 85°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47								
1.0								
2.2								
3.3								
4.7								
10					5×11	40	5×11	40
22			5×11	46	5×11	46	5×11	50
33	5×11	64	5×11	64	5×11	70	5×11	77
47	5×11	76	5×11	76	5×11	80	6.3×11	95
100	6.3×11	125	6.3×11	125	6.3×11	130	8×11.5	160
220	6.3×11	160	8×11.5	215	8×11.5	220	10×12.5	295
330	8×11.5	240	8×11.5	240	10×12.5	325	10×16	380
470	8×11.5	250	10×12.5	345	10×16	415	10×20	510
1000	10×16	425	10×20	550	12.5×20	695	12.5×25	710
2200	12.5×20	580	12.5×20	645	16×25	730	16×31.5	845

uF \ Vdc	35		50		63		100	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47			5×11	7			5×11	14
1.0			5×11	17			5×11	21
2.2			5×11	25			6.3×11	34
3.3			5×11	27	5×11	28	6.3×11	39
4.7	5×11	34	5×11	34	6.3×11	34	6.3×11	47
10	5×11	40	5×11	40	6.3×11	57	8×11.5	71
22	6.3×11	65	6.3×11	72	8×11.5	82	10×12.5	96
33	6.3×11	90	8×11.5	98	8×11.5	100	10×16	125
47	8×11.5	120	8×11.5	130	10×16	180	12.5×20	240
100	10×12.5	220	10×16	235	10×20	250	12.5×25	285
220	10×20	390	12.5×20	460	12.5×25	490	16×31.5	505
330	12.5×20	505	12.5×25	590	16×25	600		
470	12.5×25	655	16×25	668	16×35.5	720		
1000	16×25	880	16×35.5	975				

uF \ Vdc	160		200		250	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47	5×11	7	6.3×11	8	6.3×11	9
1.0	5×11	10	6.3×11	11	6.3×11	13
2.2	6.3×11	16	8×11.5	20	10×12.5	23
3.3	8×11.5	23	10×12.5	29	10×12.5	29
4.7	10×12.5	35	10×16	38	10×16	40
10	10×16	55	12.5×20	70	12.5×20	70
22	12.5×20	105	12.5×25	120	16×25	135
33	12.5×25	110	16×25	165	16×31.5	180
47	16×25	200	16×31.5	220	16×35.5	230
100	18×31.5	275				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap(uF)	Frequency (Hz)				
	50/60	120	1K	10K	100K
0.47 ~ 47	0.75	1.00	1.57	1.75	2.00
100 ~ 470	0.80	1.00	1.34	1.40	1.50
1000 ~ 2200	0.85	1.00	1.13	1.13	1.13

ALUMINUM ELECTROLYTIC CAPACITORS



ND-H Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47								
1.0								
2.2								
3.3								
4.7								
10					5×11	30	5×11	30
22			5×11	35	5×11	35	5×11	38
33	5×11	46	5×11	46	5×11	50	5×11	50
47	5×11	50	5×11	50	5×11	54	6.3×11	68
100	6.3×11	65	6.3×11	68	6.3×11	84	8×11.5	115
220	6.3×11	70	8×11.5	135	8×11.5	140	10×12.5	182
330	8×11.5	135	8×11.5	150	10×12.5	202	10×16	247
470	8×11.5	161	10×12.5	215	10×16	265	10×20	333
1000	10×16	360	10×20	380	12.5×20	475	12.5×25	510
2200	12.5×20	480	12.5×25	500	16×25	625	16×31.5	660

uF \ Vdc	35		50		63		100	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47			5×11	5			5×11	10
1.0			5×11	12			5×11	15
2.2			5×11	18			6.3×11	24
3.3			5×11	19	5×11	20	6.3×11	28
4.7	5×11	24	5×11	24	6.3×11	24	6.3×11	34
10	5×11	30	5×11	30	6.3×11	41	8×11.5	51
22	6.3×11	44	6.3×11	45	8×11.5	68	10×12.5	70
33	6.3×11	56	8×11.5	65	10×12.5	69	10×16	95
47	8×11.5	86	8×11.5	80	10×16	130	12.5×20	173
100	10×12.5	142	10×16	150	10×20	165	12.5×25	205
220	10×20	256	12.5×20	280	12.5×25	310	16×31.5	365
330	12.5×20	364	12.5×25	365	16×25	410		
470	12.5×25	472	16×25	450	16×35.5	455		
1000	16×25	560	16×35.5	615				

uF \ Vdc	160		200		250	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47	5×11	6	6.3×11	6	6.3×11	6
1.0	5×11	8	6.3×11	8	6.3×11	9
2.2	6.3×11	12	8×11.5	14	10×12.5	17
3.3	8×11.5	17	10×12.5	21	10×12.5	21
4.7	10×12.5	25	10×16	27	10×16	29
10	10×16	40	12.5×20	50	12.5×20	50
22	12.5×20	76	12.5×25	86	16×25	97
33	12.5×25	95	16×25	119	16×31.5	130
47	16×25	144	16×31.5	158	16×35.5	166
100	18×31.5	210				

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Cap(uF)	Frequency (Hz)				
	50/60	120	1K	10K	100K
0.47 ~ 47	0.75	1.00	1.57	1.75	2.00
100 ~ 470	0.80	1.00	1.34	1.40	1.50
1000 ~ 2200	0.85	1.00	1.13	1.13	1.13

Three electrolytic capacitors are shown, each labeled with its capacitance and voltage rating: 1000µF 16V.


- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

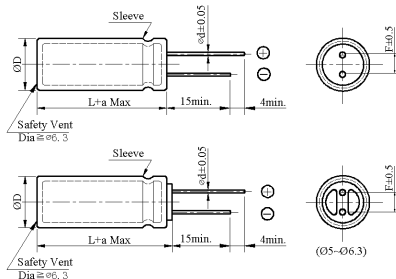

ΦD	5	6.3	8	10	12.5 L< 35	12.5 L≥ 35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

L	B	1	K	1	0	0	M	N	N	6	3	1	1						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

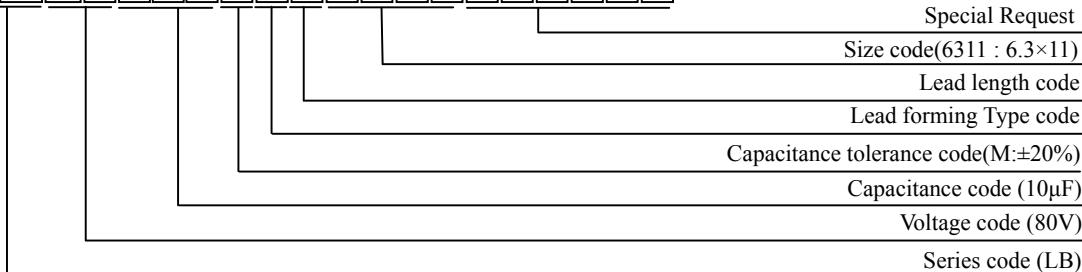

ALUMINUM ELECTROLYTIC CAPACITORS



LB Series

◆ Case size & Permissible rated ripple current: (mA rms) at 85°C / 120Hz

Vdc uF	6.3		10		16		25		35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
15									5×11	48
22							5×11	60	6.3×11	72
33					5×11	66	6.3×11	82	6.3×11	88
47			5×11	72	6.3×11	90	6.3×11	96	8×11.5	120
68	5×11	86	6.3×11	104	6.3×11	122	8×11.5	132	8×11.5	162
100	5×11	114	6.3×11	120	8×11.5	156	8×11.5	162	10×12.5	204
150	6.3×11	146	8×11.5	160	8×11.5	210	10×12.5	238	10×16	285
220	6.3×11	180	8×11.5	204	10×12.5	270	10×16	312	10×20	366
330	8×11.5	270	10×12.5	294	10×16	360	10×20	414	12.5×20	498
470	10×12.5	318	10×16	396	10×16	468	12.5×20	552	12.5×25	642
680	10×16	384	10×20	504	12.5×20	636	12.5×20	780	12.5×25	864
1000	10×20	554	10×20	684	12.5×20	810	12.5×25	900	16×25	1044
1500	12.5×20	720	12.5×20	904	12.5×25	1032	16×31.5	1218	16×35.5	1338
2200	12.5×20	948	12.5×25	1152	16×25	1260	16×31.5	1482	18×35.5	1632
3300	16×25	1240	16×25	1434	16×31.5	1902	18×40	1956	18×40	2160
4700	16×31.5	1530	16×31.5	1700	18×35.5	2268	18×40	2568		

Vdc uF	50		63		80		100	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47							5×11	12
1.0							5×11	18
2.2	5×11	15	5×11	15	5×11	15	5×11	26
3.3	5×11	22	5×11	24	5×11	25	5×11	32
4.7	5×11	26	5×11	29	5×11	30	6.3×11	43
6.8	5×11	32	5×11	36	5×11	38	6.3×11	54
10	5×11	36	5×11	44	6.3×11	50	8×11.5	73
15	5×11	48	6.3×11	60	8×11.5	66	10×12.5	98
22	5×11	60	8×11.5	78	8×11.5	90	10×12.5	127
33	6.3×11	78	8×11.5	102	10×12.5	114	10×16	170
47	6.3×11	112	8×11.5	126	10×12.5	160	10×20	220
68	8×11.5	134	10×12.5	174	10×16	186	12.5×20	288
100	8×11.5	192	10×16	240	10×20	264	12.5×20	360
150	10×12.5	248	10×20	302	12.5×20	336	12.5×25	497
220	10×16	348	12.5×20	396	12.5×20	437	16×25	640
330	10×20	444	12.5×20	497	12.5×25	540	16×31.5	842
470	12.5×20	546	12.5×25	660	16×31.5	780	18×35.5	1068
680	16×25	782	16×25	870	16×35.5	966		
1000	16×25	1032	16×31.5	1200	18×35.5	1296		
1500	16×31.5	1224	18×35.5	1464				
2200	18×40	1584						
3300	18×40	1896						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap(uF)	Frequency (Hz)				
	50/60	120	1K	10K	100K
0.47 ~ 68	0.75	1.00	1.57	1.75	2.00
100 ~ 680	0.80	1.00	1.34	1.40	1.50
1000 ~ 4700	0.85	1.00	1.13	1.13	1.13

LB-H Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	6.3		10		16		25		35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
15									5×11	40
22							5×11	50	6.3×11	60
33					5×11	55	6.3×11	68	6.3×11	73
47			5×11	60	6.3×11	75	6.3×11	80	8×11.5	100
68	5×11	72	6.3×11	87	6.3×11	102	8×11.5	110	8×11.5	135
100	5×11	95	6.3×11	100	8×11.5	130	8×11.5	135	10×12.5	170
150	6.3×11	122	8×11.5	134	8×11.5	175	10×12.5	198	10×16	238
220	6.3×11	150	8×11.5	170	10×12.5	225	10×16	260	10×20	305
330	8×11.5	225	10×12.5	245	10×16	300	10×20	345	12.5×20	415
470	10×12.5	265	10×16	325	10×16	390	12.5×20	460	12.5×25	535
680	10×16	320	10×20	420	12.5×20	530	12.5×20	650	12.5×25	720
1000	10×20	462	10×20	570	12.5×20	675	12.5×25	725	16×25	870
1500	12.5×20	600	12.5×20	753	12.5×25	860	16×31.5	1015	16×35.5	1115
2200	12.5×20	790	12.5×25	960	16×25	1050	16×31.5	1235	18×35.5	1360
3300	16×25	1033	16×25	1195	16×31.5	1585	18×40	1630	18×40	1800
4700	16×31.5	1275	16×31.5	1420	18×35.5	1890	18×40	2140		

uF \ Vdc	50		63		80		100	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
0.47							5×11	10
1.0	5×11	12	5×11	12	5×11	12	5×11	15
2.2	5×11	18	5×11	20	5×11	21	5×11	22
3.3	5×11	22	5×11	24	5×11	25	5×11	27
4.7	5×11	27	5×11	30	5×11	32	6.3×11	36
6.8	5×11	30	5×11	37	6.3×11	42	6.3×11	45
10	5×11	40	6.3×11	50	8×11.5	55	8×11.5	61
15	5×11	50	8×11.5	65	8×11.5	75	10×12.5	82
22	6.3×11	65	8×11.5	85	10×12.5	95	10×12.5	106
33	6.3×11	93	8×11.5	105	10×12.5	133	10×16	142
47	8×11.5	112	10×12.5	145	10×16	155	10×20	184
68	8×11.5	160	10×16	200	10×20	220	12.5×20	240
100	10×12.5	207	10×20	252	12.5×20	280	12.5×20	300
150	10×16	290	12.5×20	330	12.5×20	364	12.5×25	414
220	10×20	370	12.5×20	414	12.5×25	450	16×25	533
330	12.5×20	455	12.5×25	550	16×31.5	650	16×31.5	702
470	16×25	652	16×25	725	16×35.5	805	18×35.5	890
680	16×25	860	16×31.5	1000	18×35.5	1080		
1000	16×31.5	1020	18×35.5	1220				
1500	18×40	1320						
2200	18×40	1580						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap(uF)	Frequency (Hz)				
	50/60	120	1K	10K	100K
0.47 ~ 68	0.75	1.00	1.57	1.75	2.00
100 ~ 680	0.80	1.00	1.34	1.40	1.50
1000 ~ 4700	0.85	1.00	1.13	1.13	1.13

ALUMINUM ELECTROLYTIC CAPACITORS



SM Series


- Standard size downsized
- 2,000 hours assured at 85°C



SPECIFICATIONS

Item	Performance Characteristics											
Category Temperature Range	-40 ~ +85℃								-25 ~ +85℃			
Working Voltage Range	6.3 ~ 100Vdc								160 ~ 450Vdc			
Capacitance Range	0.1 ~ 22,000μF								0.47 ~ 470 μF			
Capacitance Tolerance	±20% (at 25℃ and 120Hz)											
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450	
	tanδ(Max)	0.26	0.22	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.20	
The above values should be increased by 0.02 for every additional 1000μF												
Leakage Current	I=0.01CV or 3μA whichever is greater (6.3 ~ 100V) I=0.03CV + 10μA (160 ~ 450V) I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes											
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350	400 ~ 450
	Z(-40℃)/Z(+20℃)	12	10	8	5	4	3	3	3	—	—	—
	Z(-25℃)/Z(+20℃)	—	—	—	—	—	—	—	—	3	6	6
(at 120Hz)												
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 2,000 hours at 85℃.											
	Capacitance change					≒ ±20% of the initial value						
	Dissipation factor(tanδ)					≒ 200% of the specified value						
	Leakage current					≒ specified value						
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 85℃ without voltage applied.											
	Capacitance change					≒ ±20% of the initial value						
	Dissipation factor(tanδ)					≒ 200% of the specified value						
	Leakage current					≒ 200% of the specified value						
Others	Conforms to JIS-C-5101-4 (1998), characteristic W											


DIMENSIONS (mm)

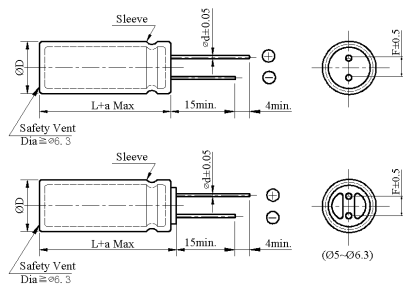

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18	20	22
ΦD	ΦD +0.5 Max								ΦD +1.0 Max	
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8	1.0	1.0
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5	10	10
a	L+1.5 Max				≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L+1.5 Max		L+2.0 Max	

PART NUMBER SYSTEM (Example : 35V 150μF)

S M 1 V 1 5 I M N N 0 8 1 2

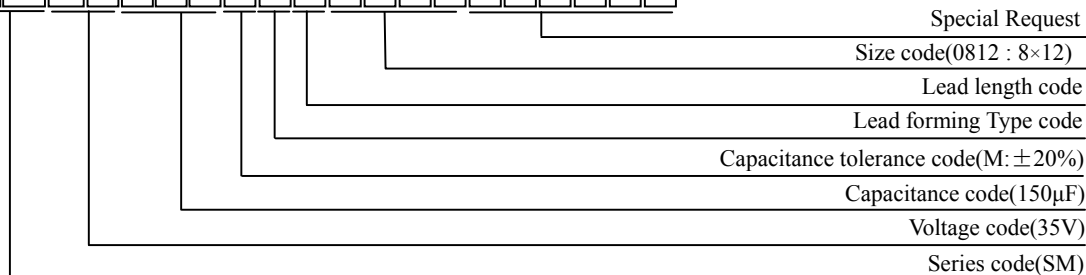

ALUMINUM ELECTROLYTIC CAPACITORS



SM Series

◆ Case size & Permissible rated ripple current: (mA rms) at 85°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
4.7							5×11	30
10					5×11	40	5×11	55
22	5×11	65	5×11	65	5×11	75	5×11	80
33	5×11	80	5×11	85	5×11	90	5×11	95
47	5×11	95	5×11	100	5×11	110	5×11	120
68	5×11	100	5×11	110	5×11	120	6.3×11	145
100	5×11	130	5×11	150	5×11	160	6.3×11	190
150	5×11	150	5×11	160	6.3×11	210	6.3×11	210
220	5×11	200	5×11	220	6.3×11	270	8×11.5	320
330	6.3×11	270	6.3×11	300	8×11.5	370	8×11.5	400
470	6.3×11	330	6.3×11	360	8×11.5	440	10×12.5	520
680	8×11.5	445	8×11.5	445	10×12.5	500	10×16	605
1000	8×11.5	540	10×12.5	650	10×16	770	10×20	930
2200	10×16	930	10×20	1130	12.5×20	1300	12.5×25	1550
3300	10×20	1230	12.5×20	1450	12.5×25	1700	16×25	1730
4700	12.5×20	1520	12.5×25	1790	16×25	1840	16×31.5	2140
6800	12.5×25	1890	16×25	1940	16×31.5	2280	18×35.5	2630
10000	16×25	2030	16×31.5	2470	18×35.5	2750		
15000	16×35.5	2590	18×35.5	2870				
22000	18×35.5	3220	18×40	3300				

uF \ Vdc	35		50		63		100	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
0.1			5×11	2			5×11	3
0.22			5×11	3			5×11	5
0.33			5×11	5			5×11	7
0.47			5×11	14			5×11	16
1			5×11	20			5×11	23
2.2			5×11	30			5×11	34
3.3			5×11	37			5×11	42
4.7	5×11	35	5×11	40	5×11	45	5×11	50
10	5×11	60	5×11	65	5×11	65	6.3×11	80
22	5×11	90	5×11	95	5×11	95	6.3×11	120
33	5×11	110	6.3×11	120	6.3×11	130	8×11.5	170
47	5×11	130	6.3×11	160	6.3×11	160	10×12.5	220
68	6.3×11	160	6.3×11	170	8×11.5	180	10×12.5	235
100	6.3×11	210	8×11.5	270	10×12.5	290	10×16	340
150	8×11.5	290	10×12.5	345	10×12.5	345	12.5×20	490
220	8×11.5	360	10×12.5	430	10×16	470	12.5×25	710
330	10×12.5	490	10×20	600	12.5×20	660	12.5×25	870
470	10×16	580	12.5×20	760	12.5×20	850	16×25	1010
680	10×20	720	12.5×20	875	12.5×25	1000	16×35.5	1100
1000	12.5×20	1200	12.5×25	1360	16×25	1310	18×35.5	1350
2200	16×25	1880	16×35.5	2060	18×35.5	2220		
3300	16×35.5	2190	18×35.5	2500				
4700	18×35.5	2560						

ALUMINUM ELECTROLYTIC CAPACITORS



SM Series

◆ Case size & Permissible rated ripple current: (mA rms) at 85°C / 120Hz

uF \ Vdc	160		200		250		350	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
0.47	5×11	12	5×11	12	5×11	12	5×11	14
1	5×11	17	5×11	17	6.3×11	17	6.3×11	18
2.2	6.3×11	26	6.3×11	26	6.3×11	30	8×11.5	28
3.3	6.3×11	35	6.3×11	35	8×11.5	35	8×11.5	35
4.7	6.3×11	40	8×11.5	45	8×11.5	45	10×12.5	41
10	8×11.5	65	8×11.5	70	10×12.5	70	10×16	70
22	10×16	110	10×20	110	10×20	130	12.5×20	110
33	10×20	150	10×20	160	12.5×20	160	12.5×25	140
47	12.5×20	180	12.5×20	180	12.5×20	210	16×25	220
68	12.5×25	230	12.5×25	230	16×25	250	16×31.5	260
82	12.5×25	250	12.5×25	260	16×25	265	18×31.5	270
100	12.5×25	300	16×25	330	16×31.5	310	18×31.5	305
120	12.5×25	325	16×25	350	16×31.5	345	18×31.5	340
150	16×25	360	16×31.5	400	16×35.5	530	18×35.5	380
180	16×31.5	415	16×35.5	430	18×35.5	540	18×40	410
220	16×31.5	510	16×35.5	520	18×35.5	600		
330	18×35.5	600	18×35.5	635	18×40	650		
470	18×40	700	18×40	705				

uF \ Vdc	400		450	
	ΦD × L	RC	ΦD × L	RC
0.47	6.3×11	14	6.3×11	14
1	6.3×11	18	8×11.5	19
2.2	8×11.5	28	8×11.5	25
3.3	8×11.5	32	10×12.5	32
4.7	10×16	41	10×16	50
10	10×20	70	12.5×20	75
22	12.5×25	120	12.5×25	110
33	16×25	140	16×25	150
47	16×25	160	16×31.5	220
68	16×35.5	280	18×31.5	230
82	18×31.5	290	18×35.5	245
100	18×31.5	300	18×40	280
120	18×35.5	330	18×45	300
150	18×40	360		
180	18×45	400		

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
6.3 ~ 100	0.1 ~ 68	0.75	1.00	1.57	2.00	2.00
	100 ~ 680	0.80	1.00	1.34	1.40	1.50
	1000 ~ 22000	0.85	1.00	1.13	1.13	1.13
160 ~ 450	0.47 ~ 220	0.80	1.00	1.40	1.40	1.40
	330 ~ 470	0.90	1.00	1.13	1.13	1.13

- ## ◆ SPECIFICATIONS

Item	Performance Characteristics																																														
Category Temperature Range	-40 ~ +105℃								-25 ~ +105℃																																						
Working Voltage Range	6.3 ~ 100Vdc								160 ~ 450Vdc																																						
Capacitance Range	0.47 ~ 22,000μF								0.47 ~ 560 μF																																						
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																																														
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160 ~ 250</td><td>350 ~ 450</td></tr><tr><td>tanδ(Max)</td><td>0.26</td><td>0.22</td><td>0.18</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.10</td><td>0.15</td><td>0.20</td></tr></table>											Rated Voltage (V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450	tanδ(Max)	0.26	0.22	0.18	0.16	0.14	0.12	0.10	0.10	0.15	0.20														
	Rated Voltage (V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450																																				
	tanδ(Max)	0.26	0.22	0.18	0.16	0.14	0.12	0.10	0.10	0.15	0.20																																				
The above values should be increased by 0.02 for every additional 1000μF																																															
Leakage Current	I=0.01CV or 3μA whichever is greater(6.3 ~ 100V) I=0.03CV + 10μA(160 ~ 450V) I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																																														
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160 ~ 250</td><td>350</td><td>400 ~ 450</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>12</td><td>10</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>3</td><td>6</td><td>6</td></tr></table> (at 120Hz)											Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350	400 ~ 450	Z(-40℃)/Z(+20℃)	12	10	8	5	4	3	3	3	—	—	—	Z(-25℃)/Z(+20℃)	—	—	—	—	—	—	—	—	3	6	6
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350	400 ~ 450																																				
Z(-40℃)/Z(+20℃)	12	10	8	5	4	3	3	3	—	—	—																																				
Z(-25℃)/Z(+20℃)	—	—	—	—	—	—	—	—	3	6	6																																				
Endurance	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 2,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>											Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value																														
Capacitance change	≒ ±20% of the initial value																																														
Dissipation factor(tanδ)	≒ 200% of the specified value																																														
Leakage current	≒ specified value																																														
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>											Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value																														
Capacitance change	≒ ±20% of the initial value																																														
Dissipation factor(tanδ)	≒ 200% of the specified value																																														
Leakage current	≒ 200% of the specified value																																														
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																																														

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18	20	22
ΦD	ΦD +0.5 Max								ΦD +1.0 Max	
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8	1.0	1.0
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5	10	10
a	L+1.5 Max				≤ 35 L+1.5Max ≥ 40 L+2.0 Max			L+1.5 Max	L+2.0 Max	

P	F	2	D	3	3	1	M	N	N	1	8	3	6					
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--

Series code(PF)

ALUMINUM ELECTROLYTIC CAPACITORS



PF Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	6.3		10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
10					5×11	40	5×11	43
15					5×11	45	5×11	47
22	5×11	45	5×11	51	5×11	55	5×11	60
33	5×11	55	5×11	60	5×11	70	5×11	75
47	5×11	65	5×11	75	5×11	85	5×11	90
68	5×11	70	5×11	80	5×11	100	6.3×11	125
100	5×11	100	5×11	110	6.3×11	140	6.3×11	145
150	6.3×11	120	6.3×11	130	8×11.5	180	8×11.5	200
220	6.3×11	180	6.3×11	190	8×11.5	240	8×11.5	250
330	6.3×11	190	8×11.5	270	8×11.5	285	10×12.5	350
470	8×11.5	300	8×11.5	330	10×12.5	380	10×16	460
680	10×12.5	320	10×12.5	420	10×16	530	10×20	650
1000	10×12.5	480	10×16	570	10×20	680	12.5×20	830
1500	10×16	600	10×20	750	12.5×20	860	12.5×25	1020
2200	10×20	830	12.5×20	980	12.5×25	1130	16×25	1210
3300	12.5×20	1100	12.5×25	1250	16×25	1270	16×31.5	1540
4700	12.5×25	1320	16×25	1350	16×31.5	1570	16×35.5	1650
6800	16×25	1495	16×31.5	1670	18×35.5	1930	18×35.5	1950
10000	16×31.5	1832	18×35.5	2010	18×40	2060	18×40	2100
15000	18×35.5	2235	18×40	2360				
22000	18×40	2375						

uF \ Vdc	35		50		63		100	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
0.47			5×11	11	5×11	8	5×11	12
1			5×11	16	5×11	12	5×11	18
2.2			5×11	23	5×11	20	5×11	27
3.3			5×11	29	5×11	24	5×11	33
4.7			5×11	34	5×11	34	5×11	39
6.8			5×11	35	5×11	37	5×11	46
10	5×11	47	5×11	50	5×11	50	6.3×11	65
15	5×11	50	5×11	52	5×11	65	6.3×11	66
22	5×11	65	5×11	75	6.3×11	85	6.3×11	85
33	5×11	88	6.3×11	100	6.3×11	110	8×11.5	125
47	6.3×11	115	6.3×11	125	8×11.5	150	10×12.5	165
68	8×11.5	130	8×11.5	159	10×12.5	198	10×16	200
100	8×11.5	200	8×11.5	210	10×12.5	250	10×20	265
150	10×12.5	240	10×12.5	290	10×16	330	12.5×20	335
220	10×12.5	320	10×16	370	10×20	410	12.5×25	440
330	10×16	420	10×20	550	12.5×20	550	16×25	660
470	10×20	570	12.5×20	660	12.5×25	720	16×31.5	880
680	12.5×20	730	12.5×25	860	16×25	1000	16×35.5	1202
1000	12.5×25	1000	16×25	1020	16×31.5	1130	18×35.5	1300
1500	16×25	1110	16×31.5	1350	16×35.5	1450		
2200	16×31.5	1450	18×35.5	1690	18×40	1780		
3300	18×31.5	1600	18×40	2060				
4700	18×35.5	1910						

ALUMINUM ELECTROLYTIC CAPACITORS



PF Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		250		350	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
0.47	5×11	13	5×11	13	5×11	13	5×11	11
1	5×11	18	5×11	15	6.3×11	18	6.3×11	15
2.2	6.3×11	27	6.3×11	27	6.3×11	23	8×11.5	23
3.3	6.3×11	28	6.3×11	28	8×11.5	30	8×11.5	30
4.7	6.3×11	32	8×11.5	36	8×11.5	39	10×12.5	40
6.8	8×11.5	38	8×11.5	40	10×12.5	42	10×16	42
10	8×11.5	55	10×12.5	60	10×16	75	10×20	70
15	10×12.5	70	10×16	75	10×16	85	12.5×20	140
22	10×20	140	10×20	150	12.5×20	160	12.5×25	145
33	10×20	145	12.5×20	160	12.5×20	165	16×25	165
47	12.5×20	195	12.5×20	195	12.5×25	195	16×25	200
56	12.5×20	215	12.5×20	215	12.5×25	215	16×31.5	230
68	12.5×25	270	12.5×25	250	16×25	240	16×35.5	240
82	12.5×25	290	16×25	270	16×25	280	18×31.5	280
100	16×25	340	16×25	320	16×31.5	310	18×31.5	320
120	16×25	360	16×31.5	340	16×31.5	330	18×35.5	365
150	16×31.5	435	16×31.5	360	16×35.5	460	18×40	400
180	16×35.5	450	16×35.5	400	18×35.5	470	18×45	460
220	16×35.5	500	16×35.5	500	18×35.5	485		
330	18×35.5	600	18×35.5	610	18×45	610		
470	18×45	740	18×45	750				
560	18×50	800	18×50	805				

uF \ Vdc	400		450	
	ΦD × L	RC	ΦD × L	RC
0.47	6.3×11	15	6.3×11	16
1	6.3×11	14	8×11.5	21
2.2	8×11.5	25	8×11.5	22
3.3	8×11.5	30	10×12.5	30
4.7	10×16	42	10×16	36
6.8	10×16	45	10×20	40
10	10×20	70	12.5×20	75
15	12.5×20	90	12.5×25	80
22	12.5×25	140	16×25	105
33	16×25	165	16×31.5	130
47	16×25	200	18×31.5	160
56	16×31.5	210	18×31.5	170
68	16×35.5	240	18×35.5	190
82	18×31.5	270	18×40	200
100	18×31.5	310	18×40	215
120	18×35.5	340	18×45	230
150	18×40	375		
180	18×45	410		

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
6.3 ~ 250	0.47 ~ 68	0.75	1.00	1.57	2.00	2.00
	100 ~ 680	0.80	1.00	1.34	1.40	1.50
	1000 ~ 22000	0.85	1.00	1.13	1.13	1.13
350 ~ 450	0.47 ~ 220	0.80	1.00	1.40	1.40	1.40
	330 ~ 560	0.90	1.00	1.13	1.13	1.13

Four 1500µF 10V electrolytic capacitors are shown, used for power supply filtering.

- ## ◆ SPECIFICATIONS

◆ DIMENSIONS (mm)

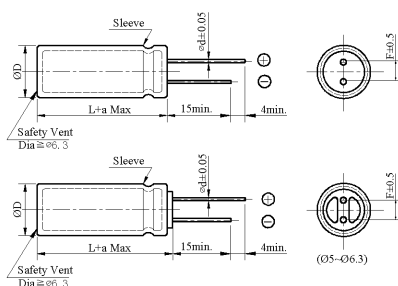

ΦD	5	6.3	8	10	12.5 L<35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 10V 5600μF)**

E	L	1	A	5	6	2	M	N	N	1	2	4	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (EL)

ALUMINUM ELECTROLYTIC CAPACITORS



EL Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	6.3V				10V				16V			
	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
100	5×11	1.780	2.690	175	5×11	1.480	2.480	250	6.3×11	1.280	2.160	290
220	6.3×11	0.880	1.760	280	6.3×11	0.580	1.660	405	8×11.5	0.460	1.560	410
330	6.3×11	0.450	1.320	405	8×11.5	0.380	1.280	500	8×11.5	0.280	1.080	760
470	8×11.5	0.110	0.380	560	8×11.5	0.072	0.220	760	8×15	0.056	0.170	995
560	8×11.5	0.072	0.220	760	8×15	0.069	0.200	805	8×20	0.052	0.160	1050
680	8×11.5	0.068	0.210	800	8×15	0.056	0.170	995	10×16	0.038	0.120	1430
820	8×15	0.056	0.170	995	8×20	0.052	0.160	1050	10×20	0.035	0.110	1520
1000	8×15	0.053	0.160	1030	8×20	0.041	0.130	1250	10×20	0.023	0.069	1820
1200	8×20	0.041	0.130	1250	10×20	0.023	0.069	1820	10×25	0.022	0.066	2150
1500	10×20	0.023	0.069	1820	10×25	0.022	0.066	2150	12.5×20	0.021	0.053	2360
2200	10×25	0.022	0.066	2150	12.5×20	0.021	0.053	2360	12.5×25	0.018	0.045	2770
2700	10×30	0.022	0.066	2200	12.5×20	0.021	0.053	2395	12.5×30	0.016	0.041	3290
3300	12.5×20	0.021	0.053	2360	12.5×25	0.018	0.045	2770	12.5×35	0.015	0.039	3400
3900	12.5×25	0.018	0.045	2770	12.5×30	0.016	0.041	3290	16×25	0.016	0.043	3460
4700	12.5×30	0.016	0.041	3290	12.5×35	0.015	0.039	3400	16×31.5	0.016	0.043	3500
5600	12.5×35	0.015	0.039	3400	12.5×40	0.016	0.043	3460	16×35.5	0.015	0.042	3540
6800	12.5×40	0.016	0.043	3460	16×31.5	0.017	0.040	3500	16×40	0.015	0.040	3585

Nominal Capacitance (uF)	25V				35V				50V			
	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
56	6.3×11	0.880	0.900	270	6.3×11	0.760	1.240	405	8×11.5	0.640	1.400	385
68	6.3×11	0.660	0.850	290	8×11.5	0.560	0.760	430	8×11.5	0.480	0.900	405
100	6.3×11	0.430	0.500	405	8×11.5	0.380	0.560	450	8×11.5	0.220	0.630	724
150	8×11.5	0.120	0.400	415	8×11.5	0.072	0.220	760	8×15	0.061	0.180	979
220	8×11.5	0.072	0.220	760	8×15	0.056	0.170	995	10×16	0.042	0.120	1370
330	8×15	0.056	0.170	995	10×16	0.038	0.120	1430	10×25	0.028	0.085	1870
470	10×16	0.038	0.120	1430	10×20	0.023	0.069	1820	12.5×20	0.027	0.068	2050
560	10×20	0.035	0.110	1505	10×25	0.022	0.066	2150	12.5×25	0.023	0.059	2410
680	10×20	0.023	0.069	1820	12.5×20	0.021	0.053	2360	12.5×30	0.021	0.052	2860
820	10×25	0.022	0.066	2150	12.5×20	0.020	0.052	2410	12.5×35	0.019	0.051	2960
1000	12.5×20	0.021	0.053	2360	12.5×25	0.018	0.045	2770	16×25	0.021	0.056	3010
1200	12.5×25	0.021	0.053	2400	12.5×30	0.016	0.041	3290				
1500	12.5×25	0.018	0.045	2770	12.5×35	0.015	0.039	3400				
2200	12.5×35	0.015	0.039	3400	16×31.5	0.015	0.039	3500				
2700	16×25	0.016	0.043	3460								

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
6.3 ~ 16	0.60	0.75	0.90	0.98	1.00
25 ~ 50	0.50	0.62	0.85	0.95	1.00

Three electrolytic capacitors are shown, each labeled 680µF 10V.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

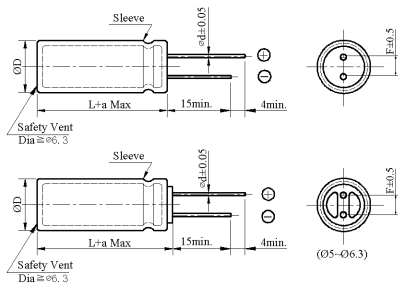

ΦD	5	6.3	8	10	12.5
ΦD	ΦD + 0.5 Max				
Φd	0.5	0.5	0.6	0.6	0.6
F	2.0	2.5	3.5	5.0	5.0
a	L + 1.5 Max				

◆ **PART NUMBER SYSTEM(Example : 6.3V 3300 μ F)**

E	B	0	J	3	3	2	M	N	N	1	0	2	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (EB)

EB Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	6.3V			10V			16V		
	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
82	5×11	1.850	165	5×11	1.350	200	6.3×11	1.200	250
100	5×11	1.650	180	5×11	1.180	260	6.3×11	0.980	300
150	6.3×11	1.320	215	6.3×11	0.960	340	6.3×11	0.880	350
220	6.3×11	0.680	295	6.3×11	0.480	425	8×11.5	0.420	430
330	6.3×11	0.320	425	8×11.5	0.250	525	8×11.5	0.180	795
470	8×11.5	0.078	605	8×11.5	0.052	805	8×11.5	0.036	1140
680	8×11.5	0.052	805	8×11.5	0.036	1140	8×15	0.028	1490
							10×12.5	0.026	1540
820	8×15	0.036	1140	8×15	0.033	1200	10×16	0.024	1605
1000	8×15	0.032	1210	8×15	0.028	1490	8×20	0.019	1870
				10×12.5	0.026	1540	10×16	0.019	2000
1200	8×15	0.028	1490	10×16	0.024	1605	10×20	0.017	2110
1500	8×20	0.016	1870	8×20	0.019	1870	10×20	0.013	2550
	10×12.5	0.026	1540	10×16	0.019	2000			
1800	8×20	0.021	1870	10×20	0.013	2550	10×25	0.012	2800
	10×16	0.019	2000						
2200	10×20	0.013	2550	10×25	0.012	2800	10×25	0.012	2950
3300	10×25	0.012	2800	10×25	0.012	2950	12.5×25	0.012	3050

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
6.3 ~16	0.60	0.75	0.90	0.98	1.00

- Suitable for use in high ripple current capability
- Miniaturized, Low E.S.R and low impedance



Item	Performance Characteristics																		
Category Temperature Range	-40 ~ +105℃																		
Working Voltage Range	6.3 ~ 100Vdc																		
Capacitance Range	10 ~10,000 μF																		
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																		
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr> <tr> <td>tanδ(Max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td></tr> </table> The above values should be increased by 0.02 for every additional 1000μF	Rated Voltage (V)	6.3	10	16	25	35	50	63	100	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
Rated Voltage (V)	6.3	10	16	25	35	50	63	100											
tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08											
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																		
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr> <tr> <td>Z(-40℃)/Z(+20℃)</td><td>8</td><td>6</td><td>6</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td></tr> </table> (at 120Hz)	Rated voltage (V)	6.3	10	16	25	35	50	63	100	Z(-40℃)/Z(+20℃)	8	6	6	5	4	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	100											
Z(-40℃)/Z(+20℃)	8	6	6	5	4	3	3	3											
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000~5,000 hours at 105℃ <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±25% of the initial value</td><td>Size</td><td>Life time (hours)</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td><td>D×L ~ 8×12</td><td>2,000</td></tr> <tr> <td>Leakage current</td><td>≒ specified value</td><td>8×16 ~ 10Φ</td><td>3,000</td></tr> <tr> <td></td><td></td><td>12.5Φ ~ 18Φ</td><td>5,000</td></tr> </table>	Capacitance change	≒ ±25% of the initial value	Size	Life time (hours)	Dissipation factor(tanδ)	≒ 200% of the specified value	D×L ~ 8×12	2,000	Leakage current	≒ specified value	8×16 ~ 10Φ	3,000			12.5Φ ~ 18Φ	5,000		
Capacitance change	≒ ±25% of the initial value	Size	Life time (hours)																
Dissipation factor(tanδ)	≒ 200% of the specified value	D×L ~ 8×12	2,000																
Leakage current	≒ specified value	8×16 ~ 10Φ	3,000																
		12.5Φ ~ 18Φ	5,000																
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 500 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ 200% of the specified value</td></tr> </table>	Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value												
Capacitance change	≒ ±25% of the initial value																		
Dissipation factor(tanδ)	≒ 200% of the specified value																		
Leakage current	≒ 200% of the specified value																		
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																		

The image shows two technical drawings of Safety Vents. The top drawing is for type (05) and the bottom drawing is for type (05~06.3). Both drawings include a side view and a top view.

Top Drawing (05):

- Side View:** Shows a cylindrical body with a "Sleeve" at the top. The total length is $L+a$ Max. The distance from the front face to the start of the sleeve is 15min. The distance from the end of the sleeve to the front face is 4min. The sleeve has a diameter of $\phi d \pm 0.05$.
- Top View:** Shows a circular cross-section with a diameter of ϕD . The distance from the center to the edge of the sleeve is $F \pm 0.5$.
- Labels:** "Safety Vent", "Din $\cong$ 06.3", "Sleeve", " $\phi d \pm 0.05$ ", "15min.", "4min.", " ϕD ", " $F \pm 0.5$ ".

Bottom Drawing (05~06.3):

- Side View:** Similar to the top drawing, but the sleeve has a different internal profile. The dimensions are the same: $L+a$ Max, 15min, 4min, and $\phi d \pm 0.05$.
- Top View:** Shows a circular cross-section with a diameter of ϕD . The distance from the center to the edge of the sleeve is $F \pm 0.5$.
- Labels:** "Safety Vent", "Din $\cong$ 06.3", "Sleeve", " $\phi d \pm 0.05$ ", "15min.", "4min.", " ϕD ", " $F \pm 0.5$ ".

ΦD	5	6.3	8	10	12.5 L< 35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 \text{ L}+1.5\text{Max}$ $\geq 40 \text{ L}+2.0 \text{ Max}$		L + 1.5 Max	

E	D	1	E	4	7	2	M	N	N	1	6	4	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Diagram illustrating the marking code structure for the capacitor, showing the sequence of codes from left to right:

- Special Request
- Size code(1640 : 16×40)
- Lead length code
- Lead forming Type code
- Capacitance tolerance code(M: $\pm 20\%$)
- Capacitance code (4700 μ F)
- Voltage code (25V)
- Series code (ED)

ED Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	6.3V				10V			
	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
100	5×11	0.650	3.600	155	5×11	0.580	2.300	210
220	6.3×11	0.400	1.600	255	6.3×11	0.220	0.870	340
330	6.3×11	0.220	0.870	340	8×11.5	0.210	0.850	410
470	8×11.5	0.180	0.800	400	8×11.5	0.130	0.520	640
560	8×11.5	0.170	0.750	460	8×15	0.120	0.480	675
680	8×11.5	0.130	0.520	640	8×15	0.087	0.350	840
820	8×15	0.095	0.480	730	8×20	0.085	0.330	875
1000	8×15	0.087	0.350	840	10×16	0.060	0.240	1210
1200	8×20	0.069	0.270	1050	10×20	0.046	0.180	1400
1500	10×20	0.046	0.180	1400	10×20	0.045	0.180	1440
2200	10×20	0.045	0.180	1440	12.5×20	0.035	0.120	1750
2700	10×25	0.042	0.170	1700	12.5×20	0.034	0.110	1945
3300	12.5×20	0.035	0.120	1900	12.5×25	0.027	0.089	2230
3900	12.5×25	0.027	0.089	2230	12.5×30	0.024	0.078	2650
4700	12.5×30	0.024	0.078	2650	12.5×35	0.020	0.065	2880
5600	12.5×35	0.020	0.065	2880	12.5×35	0.019	0.060	2930
6800	12.5×35	0.019	0.060	2930	16×31.5	0.017	0.050	3450
8200	16×31.5	0.017	0.050	3450	16×35.5	0.015	0.044	3610
10000	16×35.5	0.015	0.044	3610	16×40	0.013	0.038	4080

Nominal capacitance (uF)	16V				25V			
	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
47	5×11	0.800	2.800	120	5×11	0.580	2.300	210
68	6.3×11	0.560	2.200	220	6.3×11	0.360	1.800	230
100	6.3×11	0.520	1.500	255	6.3×11	0.220	0.870	340
150	8×11.5	0.210	0.860	350	8×11.5	0.200	0.690	405
220	8×11.5	0.200	0.790	405	8×11.5	0.130	0.520	640
330	8×11.5	0.130	0.520	640	8×15	0.087	0.350	840
470	8×15	0.087	0.350	840	10×16	0.060	0.240	1210
560	8×20	0.085	0.340	865	10×20	0.058	0.230	1220
680	8×20	0.069	0.270	1050	10×20	0.046	0.180	1400
820	10×20	0.058	0.230	1220	10×20	0.042	0.170	1450
1000	10×20	0.046	0.180	1400	12.5×20	0.035	0.120	1730
1200	10×25	0.042	0.170	1650	12.5×25	0.034	0.110	1936
1500	12.5×20	0.035	0.120	1900	12.5×25	0.027	0.089	2230
2200	12.5×25	0.027	0.089	2230	12.5×35	0.020	0.065	2880
2700	12.5×30	0.024	0.078	2650	12.5×35	0.019	0.060	2930
3300	12.5×35	0.020	0.065	2880	16×31.5	0.017	0.050	3450
3900	12.5×40	0.017	0.056	3350	16×35.5	0.015	0.044	3610
4700	16×31.5	0.017	0.050	3450	16×40	0.013	0.038	4080
5600	16×35.5	0.015	0.044	3610				
6800	16×40	0.013	0.038	4080				

ALUMINUM ELECTROLYTIC CAPACITORS



ED Series

◆ Case size & Permissible rated ripple current:

Nominal capacitance (uF)	35V				50V			
	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	1.500	3.800	100	5×11	1.450	3.500	105
22	5×11	0.750	3.200	160	5×11	0.700	2.800	180
33	5×11	0.580	2.300	210	6.3×11	0.480	1.700	215
47	6.3×11	0.490	1.800	250	6.3×11	0.400	1.600	220
68	8×11.5	0.210	0.870	350	8×11.5	0.280	1.100	355
100	8×11.5	0.200	0.850	405	8×11.5	0.170	0.680	555
150	8×11.5	0.130	0.520	640	8×15	0.120	0.480	730
220	8×15	0.087	0.350	840	10×16	0.084	0.340	1050
330	10×16	0.060	0.240	1210	10×25	0.055	0.220	1440
470	10×20	0.046	0.180	1400	12.5×20	0.045	0.150	1660
560	10×25	0.042	0.170	1650	12.5×25	0.034	0.110	1950
680	10×30	0.031	0.120	1910	12.5×30	0.030	0.100	2310
820	12.5×25	0.030	0.110	1938	12.5×35	0.025	0.083	2510
1000	12.5×25	0.027	0.089	2230	16×25	0.025	0.075	2555
1200	12.5×30	0.024	0.078	2650	16×31.5	0.022	0.066	3010
1500	12.5×35	0.020	0.065	2880	16×35.5	0.019	0.057	3150
2200	16×31.5	0.017	0.050	3450	18×35.5	0.017	0.046	3680
2700	16×35.5	0.015	0.044	3610	18×40	0.014	0.038	3800
3300	16×40	0.013	0.038	4080				
3900	18×40	0.012	0.032	4280				

Nominal capacitance (uF)	63V				100V			
	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	2.850	9.300	30	6.3×11	2.200	9.300	60
22	6.3×11	1.850	7.200	60	8×11.5	1.100	5.000	120
33	6.3×11	1.200	5.000	115	8×15	0.620	2.800	242
47	8×11.5	1.000	4.500	170	10×12.5	0.430	1.800	288
68	8×11.5	0.610	2.500	245	10×16	0.310	1.500	357
100	8×15	0.430	1.900	305	10×25	0.200	0.840	531
220	10×20	0.210	0.920	470	12.5×30	0.100	0.420	905
330	12.5×25	0.120	0.450	784	12.5×40	0.071	0.300	1180
470	12.5×30	0.100	0.420	905	16×35.5	0.045	0.170	1790
560	12.5×35	0.083	0.350	1050	16×40	0.040	0.150	2020
680	12.5×40	0.071	0.300	1180	18×35.5	0.040	0.150	2180
820	16×31.5	0.054	0.200	1570	18×40	0.036	0.130	2330
1000	16×35.5	0.045	0.170	1790				
1200	16×40	0.040	0.150	2020				
1500	18×40	0.036	0.130	2330				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
6.3 ~100	10 ~ 68	0.30	0.65	0.85	1.00
	82 ~ 220	0.50	0.70	0.90	1.00
	330 ~ 820	0.60	0.75	0.95	1.00
	1000 ~ 10000	0.70	0.80	0.98	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



EK Series


- Miniaturized, Low ESR and Low impedance
- Suitable for use in high ripple current capability



SPECIFICATIONS

Item	Performance Characteristics																				
Category Temperature Range	-40 ~ +105℃																				
Working Voltage Range	6.3 ~ 50Vdc																				
Capacitance Range	0.10 ~ 6,800 μF																				
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																				
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>tanδ(Max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td></tr></table>							Rated Voltage (V)	6.3	10	16	25	35	50	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10
	Rated Voltage (V)	6.3	10	16	25	35	50														
	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10														
The above values should be increased by 0.02 for every additional 1000μF																					
Leakage Current	I=0.03CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																				
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>8</td><td>6</td><td>6</td><td>5</td><td>4</td><td>3</td></tr></table>							Rated voltage (V)	6.3	10	16	25	35	50	Z(-40℃)/Z(+20℃)	8	6	6	5	4	3
	Rated voltage (V)	6.3	10	16	25	35	50														
Z(-40℃)/Z(+20℃)	8	6	6	5	4	3															
(at 120Hz)																					
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000~5,000 hours at 105℃																				
	Capacitance change		≒ ±25% of the initial value			Size	Life time (hours)														
	Dissipation factor(tanδ)		≒ 200% of the specified value			≒ 6.3Φ	2,000														
	Leakage current		≒ specified value			= 8 Φ	3,000														
						= 10Φ	4,000														
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 500 hours at 105℃ without voltage applied.																				
	Capacitance change		≒ ±25% of the initial value			≒ 12.5Φ	5,000														
	Dissipation factor(tanδ)		≒ 200% of the specified value																		
	Leakage current		≒ 200% of the specified value																		
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																				


DIMENSIONS (mm)

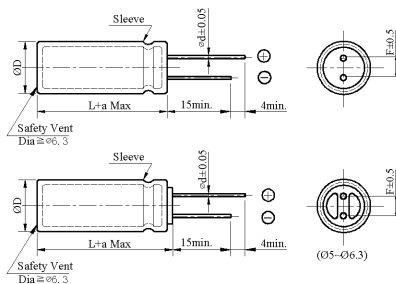

ΦD	5	6.3	8	10	12.5 L< 35	12.5 L ≥ 35	16
ΦD	ΦD + 0.5 Max						
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5
a	L + 1.5 Max				≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L + 1.5 Max

PART NUMBER SYSTEM(Example : 16V 2700μF)

E K 1 C 2 7 2 M N N 1 2 3 0

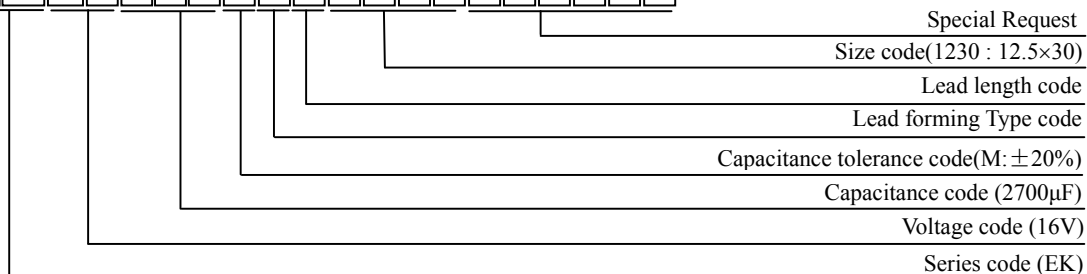

ALUMINUM ELECTROLYTIC CAPACITORS



EK Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	6.3V			10V			16V		
	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
2.2							5×11	4.500	40
4.7							5×11	4.000	80
10							5×11	1.300	90
22	6.3×11	0.150	150	5×11	0.500	80	5×11	0.800	150
47							5×11	0.350	100
56							5×11	0.300	250
100				5×11	0.300	250	5×11	0.240	320
							6.3×11	0.150	350
120							6.3×11	0.130	405
150	5×11	0.300	250	5×11	0.380	300			
220	5×11	0.300	350	6.3×11	0.130	405	6.3×11	0.110	680
				8×11.5	0.072	520	8×11.5	0.090	720
330	6.3×11	0.130	405				8×11.5	0.072	760
470				8×11.5	0.072	760	8×11.5	0.056	995
							8×15	0.056	995
				10×12.5	0.053	1030	10×12.5	0.053	1030
							10×16	0.050	1080
560	8×11.5	0.072	760						
680				8×15	0.056	995	8×15	0.045	1200
							8×20	0.041	1250
				10×12.5	0.053	1030	10×16	0.038	1430
820	8×15	0.056	995						
1000				8×20	0.041	1250			
	10×12.5	0.053	1030	10×12.5	0.038	1410			
				10×16	0.038	1430	10×20	0.023	1820
1200	8×20	0.041	1250	10×20	0.023	1820	10×25	0.022	2150
	10×16	0.038	1430						
1500	10×20	0.023	1820	10×25	0.022	2150			
				12.5×20	0.021	2150	12.5×20	0.021	2360
2200	10×25	0.022	2150	10×30	0.021	2500	12.5×25	0.018	2770
2700	12.5×20	0.022	2200				12.5×30	0.016	3290
							16×20	0.018	3140
3300	12.5×20	0.021	2360	12.5×25	0.018	2770	12.5×35	0.015	3400
3900	12.5×25	0.018	2770	12.5×30	0.016	3290			
				16×20	0.018	3140	16×25	0.016	3460
4700	12.5×30	0.016	3290	12.5×35	0.015	3400			
5600	12.5×35	0.015	3400	16×25	0.016	3460			
	16×20	0.018	3140						
6800	16×25	0.016	3460						

ALUMINUM ELECTROLYTIC CAPACITORS



EK Series

◆ Case size & Permissible rated ripple current:

Nominal Capacitance (uF)	25V			35V			50V		
	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance @20°C (Ωmax/100kHz)	Max. Rated ripple current @105°C 100kHz (mA rms)
0.1							5×11	20.000	38
0.22							5×11	15.000	40
0.33							5×11	12.000	45
0.47							5×11	4.000	50
1							5×11	3.600	100
2.2							5×11	3.600	140
4.7	5×11	1.200	100				5×11	3.600	140
10	5×11	1.200	100	5×11	0.800	170	5×11	0.900	180
22	5×11	1.000	120				5×11	0.750	238
33				5×11	0.300	250			
47	5×11	0.300	250				6.3×11	0.340	285
56				6.3×11	0.130	405	6.3×11	0.140	385
68									
100	6.3×11	0.130	405				8×11.5	0.074	724
120							8×15	0.061	950
150				8×11.5	0.072	760	10×12.5	0.061	979
180							8×20	0.046	1190
220	8×11.5	0.072	840	8×15	0.056	995	10×16	0.042	1370
270				10×12.5	0.053	1030			
330				8×20	0.041	1250	10×20	0.030	1580
470	8×15	0.056	995						
	10×12.5	0.053	1030	10×16	0.038	1430	10×25	0.028	1870
	8×20	0.041	1250						
	10×12.5	0.038	1300	10×16	0.030	1620			
560	10×16	0.038	1430	10×20	0.023	1820			
	12.5×16	0.035	1480	12.5×16	0.033	1750	12.5×20	0.027	2050
680				10×25	0.022	2150	12.5×25	0.023	2410
820	10×16	0.028	1750				12.5×20	0.028	2700
	10×20	0.023	1820	12.5×20	0.021	2360	12.5×30	0.021	2860
	10×25	0.022	2150				12.5×35	0.019	2960
1000							16×20	0.023	2730
	12.5×16	0.028	2250	12.5×20	0.050	2610			
1200	12.5×20	0.021	2360	12.5×25	0.018	2770	16×25	0.021	3010
				12.5×30	0.016	3290			
1500				16×20	0.018	3140			
1800	12.5×25	0.018	2770	12.5×35	0.015	3400			
	12.5×30	0.016	3290						
2200	16×20	0.018	3140	16×25	0.016	3460			
	12.5×35	0.015	3400						
2700	16×25	0.016	3460						

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
6.3 ~50	0.10 ~ 68	0.30	0.55	0.80	1.00
	82 ~ 220	0.40	0.60	0.85	1.00
	330 ~ 820	0.50	0.65	0.90	1.00
	1000 ~ 6800	0.60	0.70	0.95	1.00

Three electrolytic capacitors are shown, each labeled with "4700µF" and "6.3V". They are dark in color with two leads extending from the bottom.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

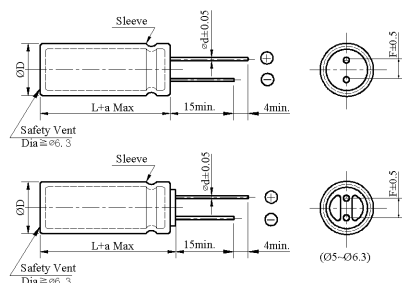

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L+1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 16V 3300 μ F)**

E	V	1	C	3	3	2	M	N	N	1	6	2	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (EV)

EV Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	6.3V				10V				16 V			
	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
100									5×11	0.230	0.760	360
150					5×11	0.230	0.760	360	6.3×11	0.100	0.330	450
220	5×11	0.230	0.760	360	6.3×11	0.100	0.330	450	6.3×11	0.100	0.330	550
330	6.3×11	0.100	0.330	460	6.3×11	0.100	0.330	550	8×11.5	0.059	0.181	830
470	6.3×11	0.100	0.330	550	8×11.5	0.059	0.181	820	8×11.5	0.059	0.181	990
680	8×11.5	0.059	0.181	860	8×11.5	0.059	0.181	990	8×15	0.046	0.143	1330
820	8×11.5	0.059	0.181	990	10×12.5	0.043	0.133	1250	10×12.5	0.043	0.133	1360
1000	10×12.5	0.043	0.133	1250	10×16	0.039	0.128	1450	10×16	0.030	0.095	1650
1200	10×12.5	0.043	0.133	1360	10×16	0.030	0.095	1650	8×20	0.031	0.105	1550
1500	8×15	0.046	0.143	1330	10×16	0.030	0.095	1650	10×16	0.030	0.095	1815
1800	8×20	0.031	0.105	1550	10×16	0.030	0.095	1815	10×20	0.019	0.057	1930
2200	10×16	0.030	0.095	1815	8×20	0.031	0.105	1550	10×20	0.019	0.057	2160
2700	10×20	0.019	0.057	2160	10×20	0.019	0.057	2160	10×25	0.017	0.051	2475
3300	10×25	0.017	0.051	2475	10×25	0.017	0.051	2475	12.5×20	0.016	0.041	2725
3900	12.5×20	0.016	0.041	2500	12.5×20	0.016	0.041	2725	12.5×25	0.014	0.036	3190
4700	12.5×25	0.014	0.036	3190	12.5×25	0.014	0.036	3190	12.5×30	0.012	0.031	3795
5600	12.5×30	0.012	0.031	3795	12.5×30	0.012	0.031	3795	16×20	0.014	0.036	3575
6800	16×20	0.014	0.036	3575	12.5×35	0.011	0.029	3925	12.5×35	0.011	0.029	3925
8200	16×25	0.012	0.033	3990	12.5×35	0.011	0.029	3925	16×25	0.012	0.033	3990

ALUMINUM ELECTROLYTIC CAPACITORS



EV Series

◆ Case size & Permissible rated ripple current

Nominal Capacitance (uF)	25 V				35 V			
	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case Size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	0.650	1.320	300	5×11	0.840	2.420	360
47					5×11	0.230	0.760	390
68	5×11	0.230	0.760	360	6.3×11	0.100	0.330	450
100	6.3×11	0.100	0.330	450	6.3×11	0.100	0.330	550
150	8×11.5	0.100	0.330	550	8×11.5	0.059	0.181	820
220	8×15	0.059	0.181	810	8×11.5	0.059	0.181	990
					8×15	0.048	0.150	1200
270	8×11.5	0.059	0.181	900	8×15	0.046	0.143	1330
330	8×11.5	0.059	0.181	990	10×12.5	0.043	0.133	1360
390	8×15	0.046	0.143	1330	8×20	0.031	0.105	1550
470	10×12.5	0.043	0.133	1360	10×16	0.030	0.095	1815
560	8×20	0.031	0.105	1550	10×20	0.019	0.057	2160
680	10×16	0.030	0.095	1815	10×25	0.017	0.051	2475
820	10×20	0.019	0.057	2160	12.5×20	0.016	0.041	2725
1000	10×25	0.017	0.051	2475	12.5×20	0.016	0.041	2920
1200	12.5×20	0.016	0.041	2570	12.5×25	0.014	0.041	3190
1500	12.5×20	0.016	0.041	2725	12.5×30	0.012	0.031	3795
					16×20	0.014	0.036	3575
1800	12.5×35	0.014	0.036	3190	12.5×35	0.011	0.029	3925
2200	12.5×30	0.012	0.031	3795	16×25	0.012	0.033	3990
	16×20	0.014	0.036	3575				
2700	12.5×35	0.011	0.029	3925				
3300	16×25	0.012	0.033	3990				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
6.3 ~ 35	10 ~ 68	0.30	0.55	0.80	1.00
	82 ~ 220	0.40	0.60	0.85	1.00
	330 ~ 820	0.50	0.65	0.90	1.00
	1000 ~ 8200	0.60	0.70	0.95	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



EJ Series


- Low impedance and High ripple current
- Load life 3,000 to 5,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics																							
Category Temperature Range	-55~ +105℃																							
Working Voltage Range	6.3 ~ 63Vdc																							
Capacitance Range	10 ~10,000μF																							
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																							
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>tanδ(Max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td></tr></table>								Rated Voltage (V)	6.3	10	16	25	35	50	63	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09
	Rated Voltage (V)	6.3	10	16	25	35	50	63																
	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																
The above values should be increased by 0.02 for every additional 1000μF																								
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																							
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>								Rated voltage (V)	6.3	10	16	25	35	50	63	Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3
	Rated voltage (V)	6.3	10	16	25	35	50	63																
Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3																	
(at 120Hz)																								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 3,000~5,000 hours at 105℃																							
	Capacitance change				≒ ±25% of the initial value																			
	Dissipation factor(tanδ)				≒ 200% of the specified value																			
	Leakage current				≒ specified value																			
		Size		Life time (hours)																				
		≒ 6.3Φ		3,000																				
		= 8 Φ		4,000																				
		≒ 10 Φ		5,000																				
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied.																							
	Capacitance change				≒ ±25% of the initial value																			
	Dissipation factor(tanδ)				≒ 200% of the specified value																			
	Leakage current				≒ 200% of the specified value																			
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																							

DIMENSIONS (mm)

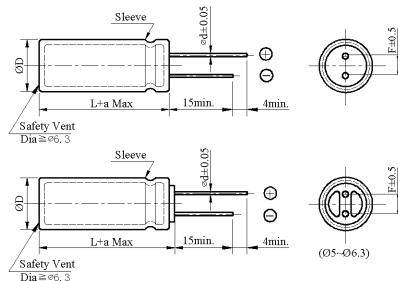

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 L+1.5\text{Max}$ $\geq 40 L+2.0\text{Max}$		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 6.3V 10000µF)

E J 0 J 1 0 3 M N N 1 6 3 6

Special Request

Size code(1636 : 16×36)

Lead length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (10000µF)

Voltage code (6.3V)

Series code (EJ)

ALUMINUM ELECTROLYTIC CAPACITORS



EJ Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	6.3V				10V			
	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
100	5×11	0.650	3.600	155	5×11	0.580	2.300	210
220	6.3×11	0.400	1.600	255	6.3×11	0.220	0.870	340
330	6.3×11	0.220	0.870	340	8×11.5	0.210	0.850	410
470	8×11.5	0.180	0.800	400	8×11.5	0.130	0.520	640
560	8×11.5	0.170	0.750	460	8×15	0.120	0.480	675
680	8×11.5	0.130	0.520	640	8×15	0.087	0.350	840
820	8×15	0.095	0.480	730	8×20	0.085	0.330	875
1000	8×15	0.087	0.350	840	10×16	0.060	0.240	1210
1200	8×20	0.069	0.270	1050	10×20	0.046	0.180	1400
1500	10×20	0.046	0.180	1400	10×20	0.045	0.180	1440
2200	10×20	0.045	0.180	1440	12.5×20	0.035	0.120	1900
2700	10×30	0.035	0.120	1910	12.5×25	0.034	0.110	1945
3300	12.5×20	0.030	0.120	1900	12.5×25	0.027	0.089	2230
3900	12.5×25	0.027	0.089	2230	12.5×30	0.024	0.078	2650
4700	12.5×30	0.024	0.078	2650	12.5×35	0.020	0.065	2880
5600	12.5×35	0.020	0.065	2880	12.5×40	0.017	0.056	3350
6800	12.5×40	0.017	0.056	3350	16×31.5	0.017	0.050	3450
8200	16×31.5	0.017	0.050	3450	16×35.5	0.015	0.044	3610
10000	16×35.5	0.015	0.044	3610	16×40	0.013	0.038	4080

Nominal capacitance (uF)	16V				25V			
	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
47	5×11	0.800	2.800	120	5×11	0.580	2.300	210
68	6.3×11	0.560	2.200	220	6.3×11	0.360	1.800	230
100	6.3×11	0.520	1.500	255	6.3×11	0.220	0.870	340
150	8×11.5	0.210	0.860	350	8×11.5	0.200	0.690	405
220	8×11.5	0.200	0.790	405	8×11.5	0.130	0.520	640
330	8×11.5	0.130	0.520	640	8×15	0.087	0.350	840
470	8×15	0.087	0.350	840	10×16	0.060	0.240	1210
560	8×20	0.085	0.340	865	10×20	0.058	0.230	1220
680	8×20	0.069	0.270	1050	10×20	0.046	0.180	1400
820	10×20	0.058	0.230	1220	10×25	0.042	0.170	1650
1000	10×20	0.046	0.180	1400	12.5×20	0.035	0.120	1900
1200	10×25	0.042	0.170	1650	12.5×25	0.034	0.110	1936
1500	12.5×20	0.035	0.120	1900	12.5×25	0.027	0.089	2230
2200	12.5×25	0.027	0.089	2230	12.5×35	0.020	0.065	2880
2700	12.5×30	0.024	0.078	2650	12.5×40	0.017	0.056	3350
3300	12.5×35	0.020	0.065	2880	16×31.5	0.017	0.050	3450
3900	12.5×40	0.017	0.056	3350	16×35.5	0.015	0.044	3610
4700	16×31.5	0.017	0.050	3450	16×40	0.013	0.038	4080
5600	16×35.5	0.015	0.044	3610				
6800	16×40	0.013	0.038	4080				

ALUMINUM ELECTROLYTIC CAPACITORS



EJ Series

◆ Case size & Permissible rated ripple current:

Nominal capacitance (uF)	35V				50V			
	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	1.500	3.800	100	5×11	1.450	3.500	105
22	5×11	0.750	3.200	160	5×11	0.700	2.800	180
33	5×11	0.580	2.300	210	6.3×11	0.480	1.700	215
47	6.3×11	0.490	1.800	215	6.3×11	0.400	1.600	220
68	8×11.5	0.210	0.870	350	8×11.5	0.280	1.100	355
100	8×11.5	0.200	0.850	405	8×11.5	0.170	0.680	555
150	8×11.5	0.130	0.520	640	8×15	0.120	0.480	730
220	8×15	0.087	0.350	840	10×16	0.084	0.340	1050
330	10×16	0.060	0.240	1210	10×25	0.055	0.220	1440
470	10×20	0.046	0.180	1400	12.5×20	0.045	0.150	1660
560	10×25	0.042	0.170	1650	12.5×25	0.034	0.110	1950
680	10×30	0.031	0.120	1910	12.5×30	0.030	0.100	2310
820	12.5×25	0.030	0.110	1938	12.5×35	0.025	0.083	2510
1000	12.5×25	0.027	0.089	2230	16×25	0.025	0.075	2555
1200	12.5×30	0.024	0.078	2650	16×31.5	0.022	0.066	3010
1500	12.5×35	0.020	0.065	2880	16×35.5	0.019	0.057	3150
2200	16×31.5	0.017	0.050	3450	18×35.5	0.017	0.046	3680
2700	16×35.5	0.015	0.044	3610	18×40	0.014	0.038	3800
3300	16×40	0.013	0.038	4080				
3900	18×40	0.012	0.032	4280				

Nominal capacitance (uF)	63V			
	Case size ΦD×L (mm)	Impedance (Ω _{max} /100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C	
10	5×11	2.850	9.300	30
22	6.3×11	1.850	7.200	60
33	6.3×11	1.200	5.000	115
47	8×11.5	1.000	4.500	170
68	8×11.5	0.610	2.500	245
100	8×15	0.430	1.900	305
100	10×12.5	0.430	1.900	305
220	10×20	0.210	0.920	470
220	10×25	0.200	0.840	531
330	12.5×25	0.120	0.450	784
470	12.5×30	0.100	0.420	905
560	12.5×35	0.083	0.350	1050
680	12.5×40	0.071	0.300	1180
820	16×31.5	0.054	0.200	1570
1000	16×35.5	0.045	0.170	1790
1200	16×40	0.040	0.150	2020
1500	18×40	0.036	0.130	2330

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
6.3 ~ 63	10 ~ 220	0.30	0.50	0.80	0.90	1.00
	330 ~ 820	0.57	0.71	0.90	0.98	1.00
	1000 ~ 10000	0.75	0.87	0.98	1.00	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



EG Series


- Low impedance and High ripple current
- Load life 3,000 to 6,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics																											
Category Temperature Range	-55~ +105℃																											
Working Voltage Range	6.3 ~ 63Vdc																											
Capacitance Range	10 ~10,000μF																											
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																											
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>tanδ(Max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td></tr></table> The above values should be increased by 0.02 for every additional 1000μF								Rated Voltage (V)	6.3	10	16	25	35	50	63	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09				
Rated Voltage (V)	6.3	10	16	25	35	50	63																					
tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																					
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																											
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table> (at 120Hz)								Rated voltage (V)	6.3	10	16	25	35	50	63	Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3				
Rated voltage (V)	6.3	10	16	25	35	50	63																					
Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3																					
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 3,000~6,000 hours at 105℃ <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td><td>Size</td><td>Life time (hours)</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td><td>≒ 6.3Φ</td><td>3,000</td></tr><tr><td>Leakage current</td><td>≒ specified value</td><td>= 8 Φ</td><td>4,000</td></tr><tr><td></td><td></td><td>= 10Φ</td><td>5,000</td></tr><tr><td></td><td></td><td>≒ 12.5Φ</td><td>6,000</td></tr></table>								Capacitance change	≒ ±25% of the initial value	Size	Life time (hours)	Dissipation factor(tanδ)	≒ 200% of the specified value	≒ 6.3Φ	3,000	Leakage current	≒ specified value	= 8 Φ	4,000			= 10Φ	5,000			≒ 12.5Φ	6,000
Capacitance change	≒ ±25% of the initial value	Size	Life time (hours)																									
Dissipation factor(tanδ)	≒ 200% of the specified value	≒ 6.3Φ	3,000																									
Leakage current	≒ specified value	= 8 Φ	4,000																									
		= 10Φ	5,000																									
		≒ 12.5Φ	6,000																									
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>								Capacitance change	≒ ±25% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value														
Capacitance change	≒ ±25% of the initial value																											
Dissipation factor(tanδ)	≒ 200% of the specified value																											
Leakage current	≒ 200% of the specified value																											
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																											

DIMENSIONS (mm)

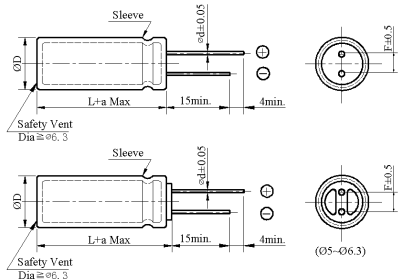

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				≅ 35 L+1.5Max ≅ 40 L+2.0 Max		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 35V 3900µF)

E G I V 3 9 2 M N N 1 8 4 0

Special Request

Size code(1840 : 18×40)

Lead length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (3900µF)

Voltage code (35V)

Series code (EG)

ALUMINUM ELECTROLYTIC CAPACITORS



EG Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	6.3V				10V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max.Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max.Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
100	5×11	0.650	3.600	155	5×11	0.580	2.300	210
220	6.3×11	0.400	1.600	255	6.3×11	0.220	0.870	340
330	6.3×11	0.220	0.870	340	8×11.5	0.210	0.850	410
470	8×11.5	0.180	0.800	400	8×11.5	0.130	0.520	640
560	8×11.5	0.170	0.750	460	8×15	0.120	0.480	675
680	8×11.5	0.130	0.520	640	8×15	0.087	0.350	840
820	8×15	0.095	0.480	730	8×20	0.085	0.330	875
1000	8×15	0.087	0.350	840	10×16	0.060	0.240	1210
1200	8×20	0.069	0.270	1050	10×20	0.046	0.180	1400
1500	10×20	0.046	0.180	1400	10×20	0.045	0.180	1440
2200	10×20	0.045	0.180	1440	12.5×20	0.035	0.120	1900
2700	10×30	0.035	0.120	1910	12.5×25	0.034	0.110	1945
3300	12.5×20	0.030	0.120	1900	12.5×25	0.027	0.089	2230
3900	12.5×25	0.027	0.089	2230	12.5×30	0.024	0.078	2650
4700	12.5×30	0.024	0.078	2650	12.5×35	0.020	0.065	2880
5600	12.5×35	0.020	0.065	2880	12.5×40	0.017	0.056	3350
6800	12.5×40	0.017	0.056	3350	16×31.5	0.017	0.050	3450
8200	16×31.5	0.017	0.050	3450	16×35.5	0.015	0.044	3610
10000	16×35.5	0.015	0.044	3610	16×40	0.013	0.038	4080

Nominal capacitance (uF)	16V				25V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max.Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max.Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
47	5×11	0.800	2.800	120	5×11	0.580	2.300	210
68	6.3×11	0.560	2.200	220	6.3×11	0.360	1.800	230
100	6.3×11	0.520	1.500	255	6.3×11	0.220	0.870	340
150	8×11.5	0.210	0.860	350	8×11.5	0.200	0.690	405
220	8×11.5	0.200	0.790	405	8×11.5	0.130	0.520	640
330	8×11.5	0.130	0.520	640	8×15	0.087	0.350	840
470	8×15	0.087	0.350	840	10×16	0.060	0.240	1210
560	8×20	0.085	0.340	865	10×20	0.058	0.230	1220
680	8×20	0.069	0.270	1050	10×20	0.046	0.180	1400
820	10×20	0.058	0.230	1220	10×25	0.042	0.170	1650
1000	10×20	0.046	0.180	1400	12.5×20	0.035	0.120	1900
1200	10×25	0.042	0.170	1650	12.5×25	0.034	0.110	1936
1500	12.5×20	0.035	0.120	1900	12.5×25	0.027	0.089	2230
2200	12.5×25	0.027	0.089	2230	12.5×35	0.020	0.065	2880
2700	12.5×30	0.024	0.078	2650	12.5×40	0.017	0.056	3350
3300	12.5×35	0.020	0.065	2880	16×31.5	0.017	0.050	3450
3900	12.5×40	0.017	0.056	3350	16×35.5	0.015	0.044	3610
4700	16×31.5	0.017	0.050	3450	16×40	0.013	0.038	4080
5600	16×35.5	0.015	0.044	3610				
6800	16×40	0.013	0.038	4080				

ALUMINUM ELECTROLYTIC CAPACITORS



EG Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	35V				50V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	1.500	3.800	100	5×11	1.450	3.500	105
22	5×11	0.750	3.200	160	5×11	0.700	2.800	180
33	5×11	0.580	2.300	210	6.3×11	0.480	1.700	215
47	6.3×11	0.490	1.800	215	6.3×11	0.400	1.600	220
68	8×11.5	0.210	0.870	350	8×11.5	0.280	1.100	355
100	8×11.5	0.200	0.850	405	8×11.5	0.170	0.680	555
150	8×11.5	0.130	0.520	640	8×15	0.120	0.480	730
220	8×15	0.087	0.350	840	10×16	0.084	0.340	1050
330	10×16	0.060	0.240	1210	10×25	0.055	0.220	1440
470	10×20	0.046	0.180	1400	12.5×20	0.045	0.150	1660
560	10×25	0.042	0.170	1650	12.5×25	0.034	0.110	1950
680	10×30	0.031	0.120	1910	12.5×30	0.030	0.100	2310
820	12.5×25	0.030	0.110	1938	12.5×35	0.025	0.083	2510
1000	12.5×25	0.027	0.089	2230	16×25	0.025	0.075	2555
1200	12.5×30	0.024	0.078	2650	16×31.5	0.022	0.066	3010
1500	12.5×35	0.020	0.065	2880	16×35.5	0.019	0.057	3150
2200	16×31.5	0.017	0.050	3450	18×35.5	0.017	0.046	3680
2700	16×35.5	0.015	0.044	3610	18×40	0.014	0.038	3800
3300	16×40	0.013	0.038	4080				
3900	18×40	0.012	0.032	4280				

Nominal capacitance (uF)	63V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C	
10	5×11	2.850	9.300	30
22	6.3×11	1.850	7.200	60
33	6.3×11	1.200	5.000	115
47	8×11.5	1.000	4.500	170
68	8×11.5	0.610	2.500	245
100	8×15	0.430	1.900	305
100	10×12.5	0.430	1.900	305
220	10×20	0.210	0.920	470
220	10×25	0.200	0.840	531
330	12.5×25	0.120	0.450	784
470	12.5×30	0.100	0.420	905
560	12.5×35	0.083	0.350	1050
680	12.5×40	0.071	0.300	1180
820	16×31.5	0.054	0.200	1570
1000	16×35.5	0.045	0.170	1790
1200	16×40	0.040	0.150	2020
1500	18×40	0.036	0.130	2330

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		60	120	1K	10K	100K
6.3 ~ 63	10 ~ 33	0.45	0.55	0.75	0.90	1.00
	47 ~ 330	0.60	0.70	0.85	0.95	1.00
	470 ~ 1000	0.65	0.75	0.90	0.98	1.00
	1200 ~ 10000	0.75	0.80	0.95	1.00	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



EY Series


- Miniaturized, Low E.S.R and Low impedance
- Suitable for use in high ripple current capability
- Load life 4,000~10,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics																										
Category Temperature Range	-55~ +105℃																										
Working Voltage Range	6.3 ~ 100Vdc																										
Capacitance Range	6.8 ~18,000μF																										
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																										
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>tanδ(Max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td></tr></table>									Rated Voltage (V)	6.3	10	16	25	35	50	63	100	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
	Rated Voltage (V)	6.3	10	16	25	35	50	63	100																		
	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																		
The above values should be increased by 0.02 for every additional 1000μF																											
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																										
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>									Rated voltage (V)	6.3	10	16	25	35	50	63	100	Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3	3
	Rated voltage (V)	6.3	10	16	25	35	50	63	100																		
Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3	3																			
(at 120Hz)																											
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 4,000~10,000 hours at 105℃																										
	Capacitance change		≒ ±25% of the initial value				<table><tr><td rowspan="2">Size</td><td colspan="2">Life time (hours)</td></tr><tr><td>(6.3~10WV)</td><td>(16~100WV)</td></tr><tr><td>≒ 6.3 Φ</td><td>4,000</td><td>5,000</td></tr><tr><td>8 ~ 10 Φ</td><td>6,000</td><td>7,000</td></tr><tr><td>≒ 12.5Φ</td><td>8,000</td><td>10,000</td></tr></table>			Size	Life time (hours)		(6.3~10WV)	(16~100WV)	≒ 6.3 Φ	4,000	5,000	8 ~ 10 Φ	6,000	7,000	≒ 12.5Φ	8,000	10,000				
	Size	Life time (hours)																									
		(6.3~10WV)	(16~100WV)																								
	≒ 6.3 Φ	4,000	5,000																								
8 ~ 10 Φ	6,000	7,000																									
≒ 12.5Φ	8,000	10,000																									
Dissipation factor(tanδ)		≒ 200% of the specified value																									
Leakage current		≒ specified value																									
The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied.																											
Shelf Life	Capacitance change		≒ ±25% of the initial value																								
	Dissipation factor(tanδ)		≒ 200% of the specified value																								
	Leakage current		≒ 200% of the specified value																								
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																										

DIMENSIONS (mm)

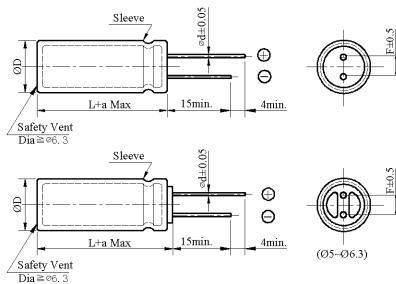

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 10V 5600μF)

E	Y	1	A	5	6	2	M	N	N	1	8	2	0						

ALUMINUM ELECTROLYTIC CAPACITORS



EY Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	6.3V				10V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
100					5×11	0.580	2.300	215
150	5×11	0.570	2.300	210	5×11	0.580	2.300	230
220	6.3×11	0.250	0.900	320	6.3×11	0.220	0.870	340
330	6.3×11	0.210	0.870	340	6.3×11	0.220	0.870	380
470	8×11.5	0.150	0.580	345	8×11.5	0.130	0.520	640
680	8×11.5	0.130	0.520	645	8×15	0.086	0.350	845
					10×12.5	0.080	0.310	865
820	10×12.5	0.080	0.320	865	10×16	0.070	0.280	1015
1000	8×15	0.085	0.350	870	8×20	0.068	0.270	1050
					10×16	0.060	0.240	1215
1200	8×20	0.071	0.260	1050	10×20	0.045	0.180	1410
	10×16	0.062	0.240	1215				
1500	10×20	0.045	0.180	1410	10×25	0.041	0.170	1610
					12.5×16	0.049	0.160	1450
1800	12.5×16	0.048	0.160	1460	12.5×20	0.039	0.150	1710
2200	10×25	0.042	0.170	1650	10×30	0.030	0.120	1920
					12.5×20	0.035	0.120	1910
					16×16	0.042	0.120	1900
2700	10×30	0.030	0.120	1900	18×15	0.042	0.110	2220
	16×15	0.041	0.120	1945				
3300	12.5×20	0.034	0.120	1900	12.5×25	0.026	0.089	2230
3900	12.5×25	0.026	0.088	2240	12.5×30	0.023	0.078	2660
	18×15	0.042	0.110	2210	16×20	0.026	0.078	2540
4700	12.5×30	0.023	0.078	2650	12.5×35	0.020	0.065	2890
5600	12.5×35	0.020	0.065	2890	12.5×40	0.016	0.055	3360
	16×20	0.026	0.077	2540	16×25	0.020	0.060	2940
					18×20	0.025	0.066	2870
6800	12.5×40	0.016	0.055	3350	16×31.5	0.016	0.050	3460
	16×25	0.020	0.060	2940	18×25	0.018	0.049	3150
	18×20	0.025	0.066	2870				
8200	16×31.5	0.016	0.050	3450	16×35.5	0.015	0.044	3610
					18×31.5	0.015	0.040	4180
10000	16×35.5	0.014	0.044	3620	16×40	0.013	0.038	4090
	18×25	0.018	0.049	3150	18×35.5	0.012	0.038	4150
12000	16×40	0.012	0.038	4090	18×40	0.011	0.032	4290
	18×31.5	0.014	0.040	4180				
15000	18×35.5	0.013	0.038	4230				
18000	18×40	0.012	0.032	4290				

ALUMINUM ELECTROLYTIC CAPACITORS



EY Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	16V				25V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	1.100	3.020	96	5×11	1.100	3.020	100
22	5×11	0.750	2.800	120	5×11	0.700	2.800	140
47	5×11	0.600	2.600	180	5×11	0.570	2.300	205
56	5×11	0.570	2.300	220	5×11	0.570	2.300	240
100	5×11	0.350	0.760	260	6.3×11	0.210	0.870	340
	6.3×11	0.210	0.820	310				
120	6.3×11	0.210	0.870	340				
220	6.3×11	0.150	0.650	450	8×11.5	0.120	0.520	650
	8×11.5	0.190	0.850	650				
330	8×11.5	0.120	0.520	760	8×15	0.087	0.350	850
					10×12.5	0.081	0.320	870
470	8×15	0.086	0.350	840	8×20	0.070	0.270	1050
	10×12.5	0.080	0.320	865	10×16	0.060	0.240	1210
680	8×20	0.069	0.270	1060	10×20	0.045	0.180	1410
	10×16	0.060	0.240	1210	12.5×16	0.049	0.160	1460
820	10×20	0.052	0.220	1310	10×25	0.041	0.170	1660
1000	10×20	0.045	0.180	1410	10×30	0.030	0.120	1920
	12.5×16	0.050	0.160	1450	12.5×20	0.034	0.120	1910
					16×16	0.042	0.120	1940
1200	10×25	0.043	0.170	1650	18×15	0.043	0.110	2220
1500	10×30	0.030	0.120	1920	12.5×25	0.026	0.089	2240
	12.5×20	0.035	0.120	1910				
	16×16	0.042	0.120	1940				
1800	12.5×25	0.028	0.095	2140	12.5×30	0.024	0.078	2660
					16×20	0.026	0.078	2540
2200	12.5×25	0.026	0.089	2240	12.5×35	0.020	0.065	2890
	18×15	0.042	0.110	2220	18×20	0.025	0.066	2870
2700	12.5×30	0.023	0.077	2650	12.5×40	0.016	0.056	3360
	16×20	0.026	0.078	2540	16×25	0.021	0.060	2940
3300	12.5×35	0.020	0.066	2890	16×30	0.016	0.050	3460
					18×25	0.018	0.048	3150
					16×35.5	0.014	0.043	3620
3900	12.5×40	0.016	0.056	3350	18×31.5	0.015	0.040	4180
	16×25	0.021	0.060	2930				
4700	16×20	0.025	0.067	2860	16×40	0.012	0.038	4090
	16×31.5	0.016	0.050	3450	18×35.5	0.013	0.038	4230
5600	18×25	0.018	0.049	3150	18×40	0.011	0.032	4290
	16×35.5	0.015	0.044	3620				
6800	18×31.5	0.015	0.040	4180				
	16×40	0.012	0.038	4080				
8200	18×35.5	0.014	0.038	4230				
18000	18×40	0.011	0.032	4290				

EY Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	35V				50V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10					5×11	1.300	2.800	135
22					5×11	0.700	2.500	180
33	5×11	0.560	2.300	220	6.3×11	0.600	1.900	205
47	6.3×11	0.350	1.400	280	6.3×11	0.380	1.500	220
56	6.3×11	0.210	0.860	340	8×11.5	0.300	1.200	300
100	8×11.5	0.150	0.560	510	8×11.5	0.160	0.670	560
150	8×11.5	0.130	0.520	650	8×15	0.120	0.480	740
220	8×15	0.086	0.350	850	10×16	0.083	0.340	1050
330	10×16	0.060	0.240	1210	10×25	0.053	0.220	1450
470	10×20	0.045	0.180	1410	12.5×20	0.044	0.150	1670
560	10×25	0.041	0.160	1650	12.5×25	0.033	0.110	1950
680	10×30	0.030	0.120	1920	12.5×30	0.030	0.100	2320
820	12.5×25	0.029	0.095	2050	12.5×35	0.023	0.081	2520
1000	12.5×25	0.028	0.088	2230	16×25	0.025	0.075	2555
1200	12.5×30	0.023	0.078	2660	16×31.5	0.021	0.066	3020
1500	12.5×35	0.020	0.065	2880	18×35.5	0.018	0.056	3150
2200	16×31.5	0.016	0.056	3350	18×35.5	0.017	0.046	3690
2700	18×35.5	0.015	0.044	3620	18×40	0.014	0.038	3810
3300	16×40	0.013	0.038	4090				
3900	18×40	0.012	0.033	4290				

Nominal capacitance (uF)	63V				100V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
6.8					5×11	2.200	9.200	56
15	5×11	2.200	9.200	56	6.3×11	1.200	5.000	120
33	6.3×11	1.200	5.000	120	8×15	0.580	3.200	160
47	8×11.5	0.680	3.100	190	10×12.5	0.430	1.800	290
68	8×11.5	0.600	2.900	245	10×16	0.300	1.500	350
100	10×16	0.350	1.800	320	10×25	0.200	0.840	535
120	10×16	0.300	1.500	355	10×30	0.150	0.710	665
180	10×20	0.200	0.940	470	12.5×25	0.120	0.450	790
220	10×25	0.200	0.840	535	12.5×30	0.100	0.420	905
330	12.5×25	0.120	0.450	790	12.5×40	0.070	0.300	1190
470	12.5×30	0.100	0.420	910	18×35.5	0.045	0.170	1790
560	12.5×35	0.082	0.350	1050	16×40	0.040	0.150	2030
680	12.5×40	0.070	0.300	1190	18×35.5	0.040	0.150	2100
820	16×31.5	0.053	0.200	1580	18×40	0.036	0.130	2340
1000	18×35.5	0.045	0.170	1790				
1200	16×40	0.040	0.150	2020				
1500	18×40	0.035	0.130	2340				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
6.3 ~ 100	6.8 ~ 68	0.30	0.55	0.80	1.00
	82 ~ 220	0.40	0.60	0.85	1.00
	330 ~ 820	0.50	0.65	0.90	1.00
	1000 ~ 18000	0.60	0.70	0.95	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



RF Series


- Miniaturized, Low E.S.R and Low impedance
- Suitable for use in high ripple current capability
- Load life 6,000~12,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics																										
Category Temperature Range	-55~ +105℃																										
Working Voltage Range	6.3 ~ 100Vdc																										
Capacitance Range	6.8 ~18,000μF																										
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																										
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>tanδ(Max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td></tr></table>									Rated Voltage (V)	6.3	10	16	25	35	50	63	100	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
	Rated Voltage (V)	6.3	10	16	25	35	50	63	100																		
	tanδ(Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																		
The above values should be increased by 0.02 for every additional 1000μF																											
Leakage Current	I=0.01CV or 3μA whichever is greater I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																										
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>									Rated voltage (V)	6.3	10	16	25	35	50	63	100	Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3	3
	Rated voltage (V)	6.3	10	16	25	35	50	63	100																		
Z(-55℃)/Z(+20℃)	4	3	3	3	3	3	3	3																			
(at 120Hz)																											
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 6,000~12,000 hours at 105℃																										
	Capacitance change		≒ ±25% of the initial value						<table><tr><td>Size</td><td>Life time (hours)</td></tr><tr><td>≒ 6.3Φ</td><td>6,000</td></tr><tr><td>8 Φ</td><td>8,000</td></tr><tr><td>10 Φ</td><td>10,000</td></tr><tr><td>≒ 12.5Φ</td><td>12,000</td></tr></table>		Size	Life time (hours)	≒ 6.3Φ	6,000	8 Φ	8,000	10 Φ	10,000	≒ 12.5Φ	12,000							
	Size	Life time (hours)																									
	≒ 6.3Φ	6,000																									
8 Φ	8,000																										
10 Φ	10,000																										
≒ 12.5Φ	12,000																										
Dissipation factor(tanδ)		≒ 200% of the specified value																									
Leakage current		≒ specified value																									
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied.																										
	Capacitance change		≒ ±25% of the initial value																								
	Dissipation factor(tanδ)		≒ 200% of the specified value																								
	Leakage current		≒ 200% of the specified value																								
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																										

DIMENSIONS (mm)

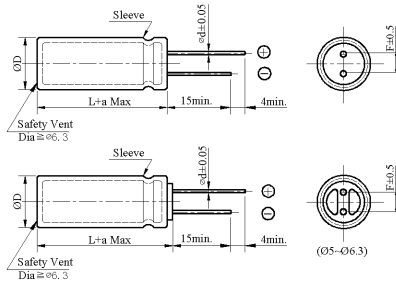

ΦD	5	6.3	8	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				≡ 35 L+1.5Max ≧ 40 L+2.0 Max		L + 1.5Max	

PART NUMBER SYSTEM(Example : 50V 2700μF)

R F 1 H 2 7 2 M N N 1 8 4 0

Special Request	
Size code(1840 : 18×40)	
Lead length code	
Lead forming Type code	
Capacitance tolerance code(M:±20%)	
Capacitance code (2700μF)	
Voltage code (50V)	
Series code (RF)	

ALUMINUM ELECTROLYTIC CAPACITORS



RF Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	6.3V				10V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
100					5×11	0.580	2.300	215
150	5×11	0.570	2.300	210	5×11	0.580	2.300	230
220	6.3×11	0.250	0.900	320	6.3×11	0.220	0.870	340
330	6.3×11	0.210	0.870	340	6.3×11	0.220	0.870	380
470	8×11.5	0.150	0.580	345	8×11.5	0.130	0.520	640
680	8×11.5	0.130	0.520	645	8×15	0.086	0.350	845
					10×12.5	0.080	0.310	865
820	10×12.5	0.080	0.320	865	10×16	0.070	0.280	1015
1000	8×15	0.085	0.350	870	8×20	0.068	0.270	1050
					10×16	0.060	0.240	1215
1200	8×20	0.071	0.260	1050	10×20	0.045	0.180	1410
	10×16	0.062	0.240	1215				
1500	10×20	0.045	0.180	1410	10×25	0.041	0.170	1610
					12.5×16	0.049	0.160	1450
1800	12.5×16	0.048	0.160	1460	12.5×20	0.039	0.150	1710
2200	10×25	0.042	0.170	1650	10×30	0.030	0.120	1920
					12.5×20	0.035	0.120	1910
					16×16	0.042	0.120	1900
2700	10×30	0.030	0.120	1900	18×15	0.042	0.110	2220
	16×15	0.041	0.120	1945				
3300	12.5×20	0.034	0.120	1900	12.5×25	0.026	0.089	2230
3900	12.5×25	0.026	0.088	2240	12.5×30	0.023	0.078	2660
	18×15	0.042	0.110	2210	16×20	0.026	0.078	2540
4700	12.5×30	0.023	0.078	2650	12.5×35	0.020	0.065	2890
5600	12.5×35	0.020	0.065	2890	12.5×40	0.016	0.055	3360
	16×20	0.026	0.077	2540	16×25	0.020	0.060	2940
					18×20	0.025	0.066	2870
6800	12.5×40	0.016	0.055	3350	16×31.5	0.016	0.050	3460
	16×25	0.020	0.060	2940	18×25	0.018	0.049	3150
	18×20	0.025	0.066	2870				
8200	16×31.5	0.016	0.050	3450	16×35.5	0.015	0.044	3610
					18×31.5	0.015	0.040	4180
10000	16×35.5	0.014	0.044	3620	16×40	0.013	0.038	4090
	18×25	0.018	0.049	3150	18×35.5	0.012	0.038	4150
12000	16×40	0.012	0.038	4090	18×40	0.011	0.032	4290
	18×31.5	0.014	0.040	4180				
15000	18×35.5	0.013	0.038	4230				
18000	18×40	0.012	0.032	4290				

ALUMINUM ELECTROLYTIC CAPACITORS



RF Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	16V				25V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	1.100	3.020	96	5×11	1.100	3.020	100
22	5×11	0.750	2.800	120	5×11	0.700	2.800	140
47	5×11	0.600	2.600	100	5×11	0.570	2.300	205
56	5×11	0.570	2.300	220	5×11	0.570	2.300	240
100	5×11	0.350	0.760	260	6.3×11	0.210	0.870	340
	6.3×11	0.210	0.820	310				
120	6.3×11	0.210	0.870	340	6.3×11	0.210	0.870	360
220	6.3×11	0.150	0.650	450	8×11.5	0.120	0.520	650
	8×11.5	0.190	0.850	650				
330	8×11.5	0.120	0.520	760	8×15	0.087	0.350	850
					10×12.5	0.081	0.320	870
470	8×15	0.086	0.350	840	8×20	0.070	0.270	1050
	10×12.5	0.080	0.320	865	10×16	0.060	0.240	1210
680	8×20	0.069	0.270	1060	10×20	0.045	0.180	1410
	10×16	0.060	0.240	1210	12.5×16	0.049	0.160	1460
820	10×20	0.052	0.220	1310	10×25	0.041	0.170	1660
1000	10×20	0.045	0.180	1410	10×30	0.030	0.120	1920
	12.5×16	0.050	0.160	1450	12.5×20	0.034	0.120	1910
					16×16	0.042	0.120	1940
1200	10×25	0.043	0.170	1650	18×15	0.043	0.110	2220
1500	10×30	0.030	0.120	1920	12.5×25	0.026	0.089	2240
	12.5×20	0.035	0.120	1910				
	16×16	0.042	0.120	1940				
1800	12.5×25	0.028	0.095	2140	12.5×30	0.024	0.078	2660
					16×20	0.026	0.078	2540
2200	12.5×25	0.026	0.089	2240	12.5×35	0.020	0.065	2890
	18×15	0.042	0.110	2220	18×20	0.025	0.066	2870
2700	12.5×30	0.023	0.077	2650	12.5×40	0.016	0.056	3360
	16×20	0.026	0.078	2540	16×25	0.021	0.060	2940
3300	12.5×35	0.020	0.066	2890	16×30	0.016	0.050	3460
					18×25	0.018	0.048	3150
3900	12.5×40	0.016	0.056	3350	16×35.5	0.014	0.043	3620
	16×25	0.021	0.060	2930	18×31.5	0.015	0.040	4180
	16×20	0.025	0.067	2860				
4700	16×31.5	0.016	0.050	3450	16×40	0.012	0.038	4090
	18×25	0.018	0.049	3150	18×35.5	0.013	0.038	4230
5600	16×35.5	0.015	0.044	3620	18×40	0.011	0.032	4290
	18×31.5	0.015	0.040	4180				
6800	16×40	0.012	0.038	4080				
8200	18×35.5	0.014	0.038	4230				
18000	18×40	0.011	0.032	4290				

ALUMINUM ELECTROLYTIC CAPACITORS



RF Series

◆ Case size & Permissible rated ripple current

Nominal capacitance (uF)	35V				50V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
10	5×11	0.700	2.500	120	5×11	1.300	2.800	135
22	5×11	0.600	1.900	165	5×11	0.700	2.500	180
33	5×11	0.560	2.300	220	6.3×11	0.600	1.900	205
47	6.3×11	0.350	1.400	280	6.3×11	0.380	1.500	220
56	6.3×11	0.210	0.860	340	8×11.5	0.300	1.200	300
100	8×11.5	0.150	0.560	510	8×11.5	0.160	0.670	560
150	8×11.5	0.130	0.520	650	8×15	0.120	0.480	740
220	8×15	0.086	0.350	850	10×16	0.083	0.340	1050
330	10×16	0.060	0.240	1210	10×25	0.053	0.220	1450
470	10×20	0.045	0.180	1410	12.5×20	0.044	0.150	1670
560	10×25	0.041	0.160	1650	12.5×25	0.033	0.110	1950
680	10×30	0.030	0.120	1920	12.5×30	0.030	0.100	2320
820	12.5×25	0.029	0.095	2050	12.5×35	0.023	0.081	2520
1000	12.5×25	0.028	0.088	2230	16×25	0.025	0.075	2555
1200	12.5×30	0.023	0.078	2660	16×31.5	0.021	0.066	3020
1500	12.5×35	0.020	0.065	2880	16×35.5	0.018	0.056	3150
2200	16×31.5	0.016	0.056	3350	18×35.5	0.017	0.046	3690
2700	16×35.5	0.015	0.044	3620	18×40	0.014	0.038	3810
3300	16×40	0.013	0.038	4090				
3900	18×40	0.012	0.033	4290				

Nominal capacitance (uF)	63V				100V			
	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)	Case size ΦD×L (mm)	Impedance (Ωmax/100kHz)		Max. Rated ripple current @105°C 100kHz (mA rms)
		20°C	-10°C			20°C	-10°C	
6.8					5×11	2.200	9.200	56
15	5×11	2.200	9.200	56	6.3×11	1.200	5.000	120
33	6.3×11	1.200	5.000	120	8×15	0.580	3.200	160
47	8×11.5	0.680	3.100	190	10×12	0.430	1.800	290
68	8×11.5	0.600	2.900	245	10×16	0.300	1.500	350
100	10×16	0.350	1.800	320	10×25	0.200	0.840	535
120	10×16	0.300	1.500	355	10×30	0.150	0.710	665
180	10×20	0.200	0.940	470	12.5×25	0.120	0.450	790
220	10×25	0.200	0.840	535	12.5×30	0.100	0.420	905
330	12.5×25	0.120	0.450	790	12.5×40	0.070	0.300	1190
470	12.5×30	0.100	0.420	910	16×35.5	0.045	0.170	1790
560	12.5×35	0.082	0.350	1050	16×40	0.040	0.150	2030
680	12.5×40	0.070	0.300	1190	18×35.5	0.040	0.150	1790
820	16×31.5	0.053	0.200	1580	18×40	0.036	0.130	2340
1000	16×35.5	0.045	0.170	1790				
1200	16×40	0.040	0.150	2020				
1500	18×40	0.035	0.130	2340				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
6.3 ~ 100	6.8 ~ 68	0.30	0.55	0.80	1.00
	82 ~ 220	0.40	0.60	0.85	1.00
	330 ~ 820	0.50	0.65	0.90	1.00
	1000 ~ 18000	0.60	0.70	0.95	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



PY Series


- High-temperature 125°C, High reliability
- Load life 2,000 hours at 125°C



SPECIFICATIONS


Item	Performance Characteristics																																										
Category Temperature Range	-40 ~ +125℃							-25 ~ +125℃																																			
Working Voltage Range	10 ~ 100Vdc							160 ~ 450Vdc																																			
Capacitance Range	4.7 ~ 1000 μF							4.7~ 150 μF																																			
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																																										
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160 ~ 250</td><td>350 ~ 450</td></tr><tr><td>tanδ(Max)</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.10</td><td>0.09</td><td>0.20</td><td>0.24</td></tr></table>										Rated Voltage (V)	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450	tanδ(Max)	0.20	0.16	0.14	0.12	0.10	0.10	0.09	0.20	0.24													
	Rated Voltage (V)	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450																																	
	tanδ(Max)	0.20	0.16	0.14	0.12	0.10	0.10	0.09	0.20	0.24																																	
The above values should be increased by 0.02 for every additional 1000μF																																											
Leakage Current	I≦0.01CV or 2μA whichever is greater (10 ~ 100V) I≦0.03CV +10μA (160 ~ 450V) I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																																										
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160 ~ 250</td><td>350</td><td>400 ~ 450</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>6</td><td>4</td><td>4</td><td>4</td><td>4</td><td>4</td><td>4</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>—</td><td>3</td><td>6</td><td>6</td></tr></table>										Rated voltage (V)	10	16	25	35	50	63	100	160 ~ 250	350	400 ~ 450	Z(-40℃)/Z(+20℃)	6	4	4	4	4	4	4	—	—	—	Z(-25℃)/Z(+20℃)	—	—	—	—	—	—	—	3	6	6
	Rated voltage (V)	10	16	25	35	50	63	100	160 ~ 250	350	400 ~ 450																																
	Z(-40℃)/Z(+20℃)	6	4	4	4	4	4	4	—	—	—																																
Z(-25℃)/Z(+20℃)	—	—	—	—	—	—	—	3	6	6																																	
(at 120Hz)																																											
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 125℃																																										
	Capacitance change		≧ ±25% of the initial value																																								
	Dissipation factor(tanδ)		≧ 200% of the specified value																																								
	Leakage current		≧ specified value																																								
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 125℃ without voltage applied. After test : UR to be applied for 30 minutes, 24 to 48 hours before measurement.																																										
	Capacitance change		≧ ±25% of the initial value																																								
	Dissipation factor(tanδ)		≧ 200% of the specified value																																								
	Leakage current		≧ 200% of the specified value																																								
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																																										

DIMENSIONS (mm)

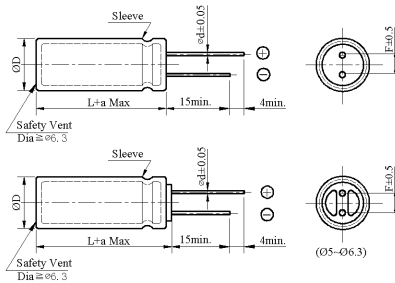

ΦD	6.3	8	10	12.5 L<35	12.5 ≥ 35	16
ΦD	ΦD + 0.5 Max					
Φd	0.5	0.6	0.6	0.6	0.8	0.8
F	2.5	3.5	5.0	5.0		7.5
a	L + 1.5 Max			≧ 35 L+1.5Max ≧ 40 L+2.0 Max		L + 1.5 Max

PART NUMBER SYSTEM(Example : 10V 1000µF)

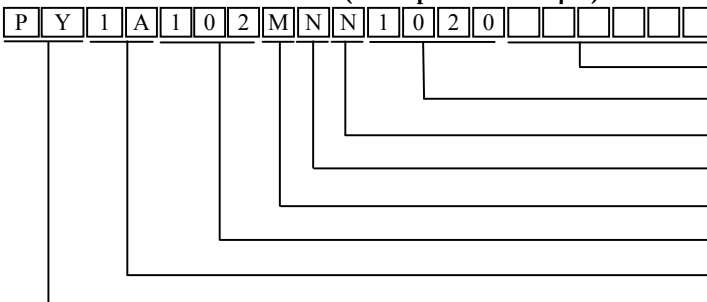

PY Series

◆ Case size & Permissible rated ripple current: (mA rms) at 125°C / 120Hz

uF \ Vdc	10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22					6.3×11	70
33			6.3×11	70	8×11.5	90
47	6.3×11	80	6.3×11	82	8×11.5	110
100	6.3×11	105	8×11.5	146	8×11.5	220
220	8×11.5	230	10×12.5	300	10×12.5	450
330	10×12.5	310	10×12.5	385	10×16	620
470	10×12.5	420	10×16	520	10×20	800
1000	10×20	760	12.5×20	800	12.5×25	900

uF \ Vdc	35		50		100	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
4.7					8×11.5	72
10					8×11.5	120
22	8×11.5	78	8×11.5	150	10×12.5	200
33	8×11.5	105	8×11.5	182	10×12.5	225
47	8×11.5	148	8×15	205	10×16	330
100	10×12.5	252	10×16	442	12.5×20	550
220	10×16	530	10×20	690	16×25	763
330	10×20	710	10×25	885	16×30	950
470	12.5×20	890	12.5×25	1120		
1000	16×25	1100	16×30	1405		

uF \ Vdc	160		200		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
10			10×20	86	10×20	90
22	10×20	120	10×25	138	12.5×20	140
33	10×25	160	12.5×20	172	12.5×25	188
47	12.5×20	195	12.5×25	224	16×25	250
68	12.5×25	255	16×20	275	16×30	320
100	16×25	345	16×25	360		
150	16×30	450				

uF \ Vdc	350		400		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
4.7	10×20	58	10×20	60	10×25	70
10	10×25	94	10×25	100	12.5×20	103
22	12.5×25	152	12.5×30	163	16×25	185
33	16×25	208	16×25	217	16×30	245
47	16×30	265	16×30	280		

◆ RIPPLE CURRENT MULTIPLIERS

(10 to 100Vdc) Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		50/60	120	1K	≥10K
10 ~ 100	<100	0.75	1.00	1.57	2.00
	100 ~ 470	0.80	1.00	1.34	1.50
	>470	0.85	1.00	1.10	1.15


(160 to 450Vdc) Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50	120	1 K	10 K	100 K
160 ~ 450	4.7~33	0.75	1.00	1.50	1.75	1.80
	47~150	0.80	1.00	1.30	1.40	1.50

Four 470µF 16V electrolytic capacitors are shown, used for power supply filtering.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

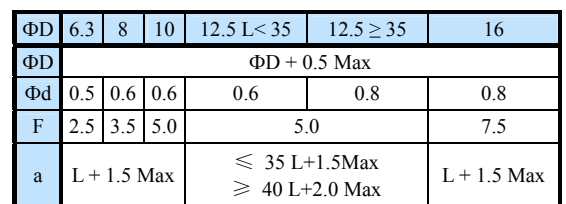

◆ **PART NUMBER SYSTEM(Example : 16V 470μF)**

110

TL Series

◆ Case size & Permissible rated ripple current: (mA rms) at 125°C / 120Hz

uF \ Vdc	10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22					6.3×11	100
33			6.3×11	90	8×11.5	115
47	6.3×11	90	6.3×11	100	8×11.5	130
100	6.3×11	130	8×11.5	155	8×11.5	250
220	8×11.5	242	10×12.5	348	10×12.5	472
330	10×12.5	335	10×16	405	10×16	690
470	10×16	440	10×20	550	10×20	875
1000	10×20	800	12.5×20	900	12.5×25	1050

uF \ Vdc	35		50	
	ΦD × L	RC	ΦD × L	RC
22	8×11.5	130	8×11.5	185
33	8×11.5	155	8×11.5	210
47	8×11.5	170	8×15	245
100	10×12.5	272	10×16	480
220	10×16	565	10×20	810
330	10×20	733	10×25	1085
470	12.5×20	895	12.5×25	1210
1000	16×25	1137	16×30	1470

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		50/60	120	1K	≥10K
10 ~ 50	<100	0.75	1.00	1.57	2.00
	100 ~ 470	0.80	1.00	1.34	1.50
	>470	0.85	1.00	1.10	1.15

- High-temperature 130℃, high reliability
- Load life 1,000~ 4,000 hours at 130℃
- For automotive electronics and lighting equipment and other high temperature applications



SPECIFICATIONS													
Item	Performance Characteristics												
Category Temperature Range	-40 ~ +130℃						-25 ~ +130℃						
Working Voltage Range	10 ~ 100Vdc						200 ~ 450Vdc						
Capacitance Range	4.7 ~ 4,700 μF						3.3~ 100 μF						
Capacitance Tolerance	±20% (at 25℃ and 120Hz)												
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	10	16	25	35	50	63	100	200	250	400	420	450
	tanδ(Max)	0.20	0.16	0.14	0.12	0.10	0.10	0.09	0.20	0.20	0.24	0.24	0.24
	The above values should be increased by 0.02 for every additional 1000μF												
Leakage Current	I ≤ 0.01CV or 2μA whichever is greater (10 ~ 100V) I ≤ 0.03CV + 10μA (200 ~ 450V) I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes												
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	10	16	25	35	50	63	100	200 ~ 250	350	400 ~ 450	(at 120Hz)	
	Z(-40℃)/Z(+20℃)	6	4	4	4	4	4	4	—	—	—		
	Z(-25℃)/Z(+20℃)	—	—	—	—	—	—	—	3	6	6		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 1,000~4,000 hours at 130℃												
		10~100 Vdc			200~450Vdc			Case Size	Life time (hours)				
	Capacitance change	≒ ±30% of the initial value			≒ ±20% of the initial value				10~100V	200~450			
	Dissipation factor(tanδ)	≒ ±300% of the specified value			≒ ±200% of the specified value				ΦD=6.3	—		1,000	
	Leakage curren	≒ Specified value							ΦD=8,10	2,000		2,000	
								ΦD≥12.5	4,000		3,000		
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 130℃ without voltage applied. After test : UR to be applied for 30 minutes, 24 to 48 hours before measurement.												
		10~100 Vdc			200~450Vdc								
	Capacitance change	≒ ± 30% of the initial value			≒ ± 20% of the initial value								
	Dissipation factor(tanδ)	≒ ± 300% of the specified value			≒ ± 200% of the specified value								
	Leakage current	≒ Specified value											
Others	Conforms to JIS-C-5101-4 (1998), characteristic W												

(a) Safety Vent with 2 holes

(b) Safety Vent with 1 hole

ΦD	6.3	8	10	$12.5 \text{ L} < 35$	$12.5 \geq 35$	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$						
Φd	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max			$\leq 35 \text{ L} + 1.5 \text{ Max}$ $> 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5Max	

T D 1 A 1 0 2 M N N 1 0 2 0

ALUMINUM ELECTROLYTIC CAPACITORS



TD Series

◆ Case size & Permissible rated ripple current: (mA rms) at 130°C / 100KHz

uF \ Vdc	10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
220					8×11.5	360
330	8×11.5	360	8×11.5	360	10×12.5	620
470	10×12.5	620	10×12.5	620	10×16	800
1000	10×20	960	10×20	960	12.5×20	1100
2200	12.5×25	1430	12.5×25	1430	16×31.5	2300
3300	16×25	1900	16×31.5	2300	16×35.5	2550
4700	16×31.5	2300	16×35.5	2550		

uF \ Vdc	35		50		63	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
4.7			8×11.5	100		
10			8×11.5	200		
22			8×11.5	260		
33			8×11.5	300	8×11.5	250
47			8×11.5	300	10×12.5	400
100	8×11.5	360	10×12.5	520	10×16	450
220	10×12.5	620	10×20	890	12.5×25	820
330	10×16	800	12.5×20	1000	12.5×30	1000
470	10×25	960	12.5×25	1200	16×25	1500
1000	12.5×30	1430	16×31.5	2180	18×35.5	1850
1500	16×31.5	1800	18×35.5	2450	18×45	2350
2200	16×35.5	2550	18×40	2800		
3300	18×35.5	2800				

uF \ Vdc	100		200		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
4.7			6.3×11	100	8×11.5	115
5.6			8×11.5	130	8×11.5	140
6.8			8×11.5	130	8×11.5	140
10	8×16	200	8×16	200	8×16	220
15	8×16	210	8×16	220	8×20	245
22	8×16	220	8×20	300	10×16	320
33	10×12.5	260	10×20	320	10×25	350
47	10×16	330	10×25	345	12.5×20	375
56	10×20	350	10×30	370	12.5×25	400
68	10×25	400	12.5×25	450	16×20	480
82	10×30	435	12.5×30	485	16×25	505
100	12.5×25	670	16×25	600		
220	16×25	1100				
330	16×31.5	1300				
470	16×40	1650				

TD Series

◆ Case size & Permissible rated ripple current: (mA rms) at 130°C / 100KHz

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
3.3	8×16	110	8×16	120	8×20	135
4.7	8×20	120	8×20	130	10×12.5	150
5.6	10×16	130	10×16	140	10×16	160
6.8	10×20	150	10×20	155	10×20	170
10	10×25	220	10×25	240	12.5×20	260
15	10×30	240	10×30	255	12.5×25	300
22	12.5×20	270	12.5×25	300	16×20	345
33	12.5×25	305	12.5×30	340		
47	16×25	400	16×31.5	445		
56	16×31.5	435				
68	16×35.5	480				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers: (10 to 100Vdc)

(200 to 450Vdc)

Vdc	Cap(uF)	Frequency (Hz)			
		120K	1K	10K	≥100K
10 ~ 100	<100	0.40	0.75	0.90	1.00
	100 ~ 470	0.50	0.85	0.94	1.00
	>470	0.60	0.87	0.95	1.00

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
200 ~ 450	3.3~15	0.30	0.60	0.90	1.00
	22~100	0.50	0.80	0.90	1.00

ALUMINUM ELECTROLYTIC CAPACITORS



TX Series


- High-temperature 135°C, high reliability
- Load life 1,000~2,000 hours at 135°C
- For automotive electronics and lighting equipment and other high temperature applications



SPECIFICATIONS

Item	Performance Characteristics																	
Category Temperature Range	-55 ~ +135℃																	
Working Voltage Range	10 ~ 50Vdc																	
Capacitance Range	22 ~ 1000 μF																	
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																	
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>tanδ(Max)</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td></tr></table>						Rated Voltage (V)	10	16	25	35	50	tanδ(Max)	0.20	0.16	0.14	0.12	0.10
	Rated Voltage (V)	10	16	25	35	50												
	tanδ(Max)	0.20	0.16	0.14	0.12	0.10												
The above values should be increased by 0.02 for every additional 1000μF																		
Leakage Current	I ≦ 0.03CV I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																	
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>6</td><td>4</td><td>4</td><td>4</td><td>4</td></tr></table> (at 120Hz)						Rated voltage (V)	10	16	25	35	50	Z(-55℃)/Z(+20℃)	6	4	4	4	4
Rated voltage (V)	10	16	25	35	50													
Z(-55℃)/Z(+20℃)	6	4	4	4	4													
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 1,000~2,000 hours at 135℃ <table><tr><td>Capacitance change</td><td>≦ ±25% of the initial value</td><td>Size</td><td>Life time (hours)</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≦ 200% of the specified value</td><td>≦ 10Φ</td><td>1,000</td></tr><tr><td>Leakage current</td><td>≦ specified value</td><td>≦ 12.5Φ</td><td>2,000</td></tr></table>						Capacitance change	≦ ±25% of the initial value	Size	Life time (hours)	Dissipation factor(tanδ)	≦ 200% of the specified value	≦ 10Φ	1,000	Leakage current	≦ specified value	≦ 12.5Φ	2,000
Capacitance change	≦ ±25% of the initial value	Size	Life time (hours)															
Dissipation factor(tanδ)	≦ 200% of the specified value	≦ 10Φ	1,000															
Leakage current	≦ specified value	≦ 12.5Φ	2,000															
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 135℃ without voltage applied. After test : UR to be applied for 30 minutes, 24 to 48 hours before measurement. <table><tr><td>Capacitance change</td><td>≦ ±25% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≦ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≦ 200% of the specified value</td></tr></table>						Capacitance change	≦ ±25% of the initial value	Dissipation factor(tanδ)	≦ 200% of the specified value	Leakage current	≦ 200% of the specified value						
Capacitance change	≦ ±25% of the initial value																	
Dissipation factor(tanδ)	≦ 200% of the specified value																	
Leakage current	≦ 200% of the specified value																	
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																	

DIMENSIONS (mm)

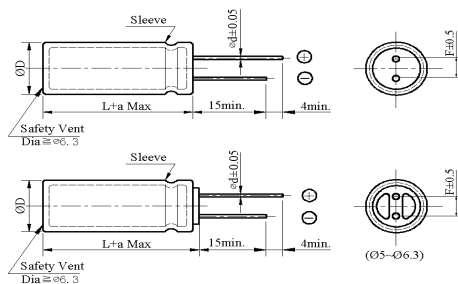

ΦD	6.3	8	10	12.5 L < 35	12.5 ≥ 35	16
ΦD	ΦD + 0.5 Max					
Φd	0.5	0.6	0.6	0.6	0.8	0.8
F	2.5	3.5	5.0	5.0		7.5
a	L + 1.5 Max		≒ 35 L + 1.5 Max ≒ 40 L + 2.0 Max		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 16V 470µF)

T	X	I	C	4	7	1	M	N	N	1	0	1	6						

Special Request
 Size code(1016 : 10×16)
 Lead length code
 Lead forming Type code
 Capacitance tolerance code(M: ±20%)
 Capacitance code (470µF)
 Voltage code (16V)
 Series code (TX)

TX Series

◆ Case size & Permissible rated ripple current: (mA rms) at 135°C / 100KHz

uF \ Vdc	10		16		25	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22					6.3×11	135
33			6.3×11	155	8×11.5	175
47	6.3×11	180	6.3×11	190	8×11.5	225
100	6.3×11	420	8×11.5	455	8×11.5	480
220	8×11.5	500	10×12.5	590	10×12.5	600
330	10×12.5	580	10×12.5	600	10×16	745
470	10×12.5	620	10×16	755	10×20	900
1000	10×20	900	12.5×20	1010	12.5×25	1290

uF \ Vdc	35		50	
	ΦD × L	RC	ΦD × L	RC
22	8×11.5	170	8×11.5	185
33	8×11.5	185	8×11.5	210
47	8×11.5	240	8×15	280
100	10×12.5	490	10×12.5	490
220	10×16	770	10×20	820
330	10×20	880	12.5×20	900
470	12.5×20	1020	12.5×25	1095
1000	16×25	1450	16×31.5	1510


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120K	1K	10K	100K
10 ~ 50	<100	0.40	0.75	0.90	1.00
	100 ~ 470	0.50	0.85	0.94	1.00
	>470	0.60	0.87	0.95	1.00

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

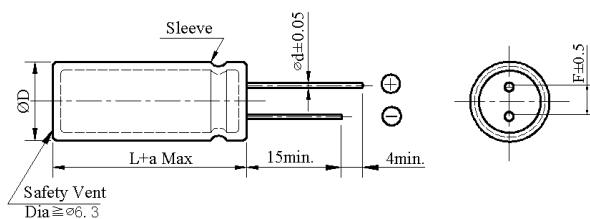

ΦD	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max			
Φd	0.6	0.8	0.8	0.8
F	5.0		7.5	7.5
a	$\leq 35 L+1.5\text{Max}$ $\geq 40 L+2.0 \text{ Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 500V 22μF)**

P	W	2	H	2	2	0	M	N	N	1	2	3	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code(PW)

PW Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		220		250		400	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68							16×30	480
82							16×31.5	500
							18×31.5	520
100							16×35.5	560
							18×31.5	580
120							16×40	660
							18×35.5	670
150			16×30	580	16×31.5	620	18×40	770
180			16×31.5	650	16×35.5	720	18×45	880
220	16×35.5	760	16×35.5	785	16×40	810		
	18×31.5	810	18×31.5	820	18×35.5	830		
330	16×40	980	18×40	1040	18×45	1070		
	18×35.5	1010						
470	18×45	1270	18×50	1350				

uF \ Vdc	420		450		475		500	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
10					12.5×20	100	12.5×20	117
15					12.5×25	128	12.5×25	144
22					12.5×30	160	12.5×30	180
33					16×25	255	16×25	279
47					18×25	340	18×25	360
68	16×31.5	495	16×35.5	505	18×31.5	475	18×35.5	495
	18×30	520	18×31.5	530				
82	16×35.5	520	16×40	535	18×35.5	550	18×40	575
	18×31.5	535	18×35.5	550				
100	16×40	590	18×40	650	18×40	630	18×45	648
	18×35.5	625						
120	18×40	720	18×45	740	18×45	675	18×50	693
150	18×45	785	18×50	800	18×50	830		
180	18×50	950						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	100K
200 ~ 500	0.80	1.00	1.30	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS



PC Series


- Downsize, high ripple current design
- Load life 2,000 hours at 105°C
- Ideal for low profile power supply application



SPECIFICATIONS

Item	Performance Characteristics				
Category Temperature Range	-25 ~ +105℃				
Working Voltage Range	200 ~ 450Vdc				
Capacitance Range	56 ~ 560 μF				
Capacitance Tolerance	±20% (at 25℃ and 120Hz)				
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	200	400	420	450
	tanδ(Max)	0.15	0.20	0.20	0.20
	The above values should be increased by 0.02 for every additional 1000μF				
Leakage Current	I=0.03CV + 10μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes				
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	200	400	420 ~ 450	
	Z(-25℃)/Z(+20℃)	3	5	6	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃				
	Capacitance change		≒ ±20% of the initial value		
	Dissipation factor(tanδ)		≒ 200% of the specified value		
	Leakage current		≒ specified value		
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied.				
	Capacitance change		≒ ±20% of the initial value		
	Dissipation factor(tanδ)		≒ 200% of the specified value		
	Leakage current		≒ 200% of the specified value		
Others	Conforms to JIS-C-5101-4 (1998), characteristic W				

DIMENSIONS (mm)

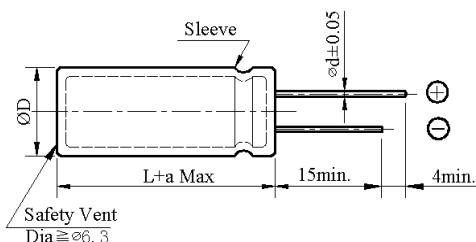

ΦD	16	18
ΦD	$\Phi D + 0.5$ Max	
Φd	0.8	0.8
F	7.5	7.5
a	L + 1.5 Max	

PART NUMBER SYSTEM(Example : 450V 150 μ F)

P	C	2	W	1	5	1	M	N	N	1	8	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(1845 : 18 $\times$ 45)

Lead length code

Lead forming Type code

Capacitance tolerance code(M: $\pm 20\%$)

Capacitance code (150 μ F)

Voltage code (450V)

Series code (PC)

ALUMINUM ELECTROLYTIC CAPACITORS



PC Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
56							16×30	390
68			16×30	400	16×30	430	16×35.5	450
82					16×35.5	490	16×40	510
							18×30	510
100			16×35.5	500	16×40	520	18×35.5	600
					18×30	520		
120			16×40	570	18×31.5	570	18×40	700
			18×30	570	18×35.5	620		
150			16×50	700	18×40	790	18×45	810
			18×35.5	700				
180			18×45	880				
220			18×50	1000				
270	16×35.5	810						
330	16×40	930						
	18×35.5	930						
390	16×45	1050						
	18×35.5	1050						
470	18×40	1180						
560	18×50	1320						

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap.(uF)	Frequency (Hz)			
		120	1K	10K	100K
200 ~ 450	56 ~ 82	1.00	1.50	1.75	1.80
	100 ~ 560	1.00	1.30	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS



PV Series


- Downsize and high ripple current
- Load life 2,000 ~ 5,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics																				
Category Temperature Range	-25 ~ +105℃																				
Working Voltage Range	200 ~ 450Vdc																				
Capacitance Range	6.8 ~ 470 μF																				
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																				
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>250</td><td>350</td><td>400</td><td>420</td><td>450</td></tr><tr><td>tanδ(Max)</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td></tr></table> The above values should be increased by 0.02 for every additional 1000μF							Rated Voltage (V)	200	250	350	400	420	450	tanδ(Max)	0.20	0.20	0.20	0.20	0.20	0.20
Rated Voltage (V)	200	250	350	400	420	450															
tanδ(Max)	0.20	0.20	0.20	0.20	0.20	0.20															
Leakage Current	I=0.02CV or 3000μA whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes																				
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>200~250</td><td>350</td><td>400</td><td>420 ~ 450</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>3</td><td>5</td><td>5</td><td>6</td></tr></table> (at 120Hz)							Rated voltage (V)	200~250	350	400	420 ~ 450	Z(-25℃)/Z(+20℃)	3	5	5	6				
Rated voltage (V)	200~250	350	400	420 ~ 450																	
Z(-25℃)/Z(+20℃)	3	5	5	6																	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 ~5,000 hours at 105℃ <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table> <table><tr><td>Size</td><td>Life time (hours)</td></tr><tr><td>ΦD ≒ 12.5Φ</td><td>2,000</td></tr><tr><td>ΦD ≒ 16 Φ</td><td>5,000</td></tr></table>							Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value	Size	Life time (hours)	ΦD ≒ 12.5Φ	2,000	ΦD ≒ 16 Φ	5,000		
Capacitance change	≒ ±20% of the initial value																				
Dissipation factor(tanδ)	≒ 200% of the specified value																				
Leakage current	≒ specified value																				
Size	Life time (hours)																				
ΦD ≒ 12.5Φ	2,000																				
ΦD ≒ 16 Φ	5,000																				
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>							Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value								
Capacitance change	≒ ±20% of the initial value																				
Dissipation factor(tanδ)	≒ 200% of the specified value																				
Leakage current	≒ 200% of the specified value																				
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																				

DIMENSIONS (mm)

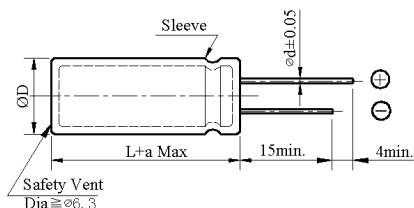

ΦD	10	12.5 L < 35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5$ Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	$\leq 35 L + 1.5 \text{ Max}$ $\geq 40 L + 2.0 \text{ Max}$		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 420V 68 μ F)

P	V	2	S	6	8	0	M	N	N	1	6	4	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(1640 : 16 $\times$ 40)

Lead length code

Lead forming Type code

Capacitance tolerance code(M: $\pm 20\%$)

Capacitance code (68 μ F)

Voltage code (420V)

Series code (PV)

PV Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		250		350	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8					10×16	90
10	10×16	100	10×20	110	10×20	110
15	10×16	110	10×20	130	10×20	130
22	10×20	180	10×20	180	12.5×20	235
33	10×20	215	12.5×20	245	12.5×25	265
47	12.5×20	310	12.5×25	340	16×25	400
68	12.5×25	420	16×20	460	18×25	510
82	16×25	490	16×25	490	18×31.5	570
100	18×25	560	18×25	610	18×35.5	650
120	18×25	600	18×25	650	18×40	750
150	18×31.5	780	18×31.5	810	20×34	840
220	18×35.5	920	18×35.5	940		
330	18×40	1010	18×50	1050		
390	18×45	1130				
470	18×50	1270				

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8	10×16	90	10×16	90	10×20	80
10	10×20	110	10×20	110	12.5×20	130
15	12.5×20	180	12.5×20	180	12.5×20	160
22	12.5×25	240	12.5×25	240	12.5×25	200
33	16×25	280	16×25	290	16×25	310
47	16×31.5	390	16×31.5	390	18×25	400
68	16×35.5	505	16×40	510	18×31.5	550
82	18×31.5	560	18×31.5	570	18×35.5	635
100	18×35.5	640	18×35.5	610	18×40	720
120	18×40	745	18×40	660	18×45	770
150	18×45	760	18×50	710	18×50	820

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	100K
200 ~ 450	0.80	1.00	1.30	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS



LF Series


- Standard size downsized
- 2,000 hours assured at 105°C



SPECIFICATIONS

Item	Performance Characteristics				
Category Temperature Range	-25 ~ +105℃				
Working Voltage Range	200 ~ 450Vdc				
Capacitance Range	1 ~ 68 μF				
Capacitance Tolerance	±20% (at 25℃ and 120Hz)				
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	200 ~ 250	350	400 ~ 450	
	tanδ(Max)	0.15	0.20	0.20	
	The above values should be increased by 0.02 for every additional 1000μF				
Leakage Current	I ≦ 0.03CV + 10 μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes				
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	200 ~ 250	350	400	420 ~ 450
	Z(-25℃)/Z(+20℃)	3	5	5	6
(at 120Hz)					
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃				
	Capacitance change		≦ ±20% of the original value		
	Dissipation factor(tanδ)		≦ 200% of the specified value		
	Leakage current		≦ specified value		
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 105℃ without voltage applied.				
	Capacitance change		≦ ±20% of the original value		
	Dissipation factor(tanδ)		≦ 200% of the specified value		
	Leakage current		≦ 200% of the specified value		
Others	Conforms to JIS-C-5101-4 (1998), characteristic W				

DIMENSIONS (mm)

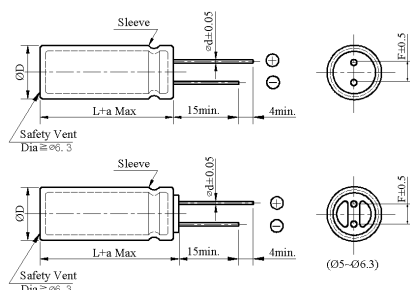

ΦD	5	6.3	8	10	12.5 L < 35	12.5 L ≥ 35	16	18
ΦD	ΦD + 0.5 Max							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 L + 1.5 \text{ Max}$ $\geq 40 L + 2.0 \text{ Max}$		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 400V 47μF)

L F 2 G 4 7 0 M N N 1 6 3 2

Special Request	
Size code(1632 : 16×32)	
Lead length code	
Lead forming Type code	
Capacitance tolerance code(M: ±20%)	
Capacitance code (47μF)	
Voltage code (400V)	
Series code (LF)	

LF Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

Vdc uF	200		250		350		400		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
1	5×11	18	5×11	16	6.3×11	16	6.3×11	18	6.3×11	15
2.2	6.3×11	27	6.3×11	26	6.3×11	28	8×11.5	33	10×12.5	28
2.7	6.3×11	30	6.3×11	30	8×11.5	35	8×11.5	38	10×12.5	35
3.3	6.3×11	33	8×11.5	35	10×12.5	41	10×12.5	41	10×16	38
4.7	8×11.5	43	8×11.5	41	10×16	49	10×16	55	10×20	41
5.6	8×11.5	46	8×11.5	49	10×16	55	10×16	60	10×20	48
6.8	8×11.5	61	8×11.5	66	10×16	60	10×20	62	12.5×20	51
8.2	8×11.5	66	10×12.5	71	10×16	71	12.5×20	82	12.5×20	62
10	10×12.5	82	10×16	81	10×20	88	12.5×20	100	12.5×25	78
15	10×16	88	10×20	104	12.5×20	110	12.5×20	145	12.5×25	104
22	10×20	132	12.5×20	143	12.5×20	126	12.5×25	180	16×25	130
33	12.5×20	175	12.5×20	171	16×20	215	16×25	235	16×31.5	185
47	12.5×25	215	12.5×25	230	16×25	290	16×31.5	290	16×35.5	215
68	16×25	230	16×25	275	16×31.5	300	18×35.5	340	18×35.5	245

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
200 ~ 450	1 ~ 68	0.80	1.00	1.40	1.60	1.60

Three electrolytic capacitors are shown, each labeled with "10µF" and "450V". They are black with silver leads.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

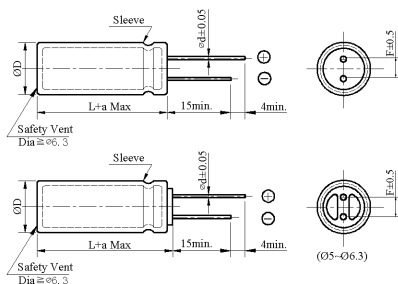

ΦD	5	6.3	8	10	12.5 L<35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$							
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0		7.5	7.5
a	L + 1.5 Max				$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 350V 15μF)**

L	L	2	V	1	5	0	M	N	N	1	2	2	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (LL)

LL Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

Vdc uF	200		250		350		400		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
1	5×11	16	5×11	15	6.3×11	15	6.3×11	17	6.3×11	14
2.2	6.3×11	25	6.3×11	23	6.3×11	26	8×11.5	30	10×12.5	24
2.7	6.3×11	28	6.3×11	28	8×11.5	32	10×12.5	35	10×12.5	30
3.3	8×11.5	30	8×11.5	32	10×12.5	38	10×12.5	38	10×16	32
4.7	8×11.5	39	8×11.5	39	10×16	45	10×16	50	10×20	41
5.6	8×11.5	42	10×12.5	45	10×16	50	10×20	55	10×20	46
6.8	10×12.5	55	10×12.5	60	10×16	55	10×20	60	12.5×20	55
8.2	10×12.5	60	10×12.5	65	10×20	65	12.5×20	75	12.5×20	60
10	10×16	65	10×16	74	10×20	80	12.5×20	90	12.5×25	75
15	10×20	80	10×20	95	12.5×20	100	12.5×25	130	12.5×25	95
22	12.5×20	120	12.5×20	130	12.5×20	115	16×25	165	16×25	125
33	12.5×20	160	12.5×25	160	16×20	195	16×31.5	215	16×31.5	175
47	12.5×25	195	12.5×25	210	16×25	270	16×35.5	270	16×35.5	205
68	16×25	210	16×25	250	16×31.5	280	18×35.5	310	18×35.5	230

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
200 ~ 450	1 ~ 68	0.80	1.00	1.40	1.60	1.60


- For electronic ballast circuits and long life
- required applications
- High ripple current
- Load life: 8,000 to 10,000 hours at 105°C



◆

◆

◆

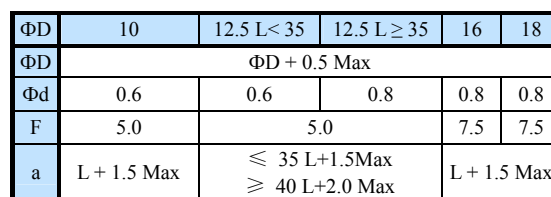

◆

3

Size code(1840 : 18×40)

Lead forming Type codeCapacitance tolerance code(M: $\pm 20\%$)

Capacitance code (150μF)

Voltage code (350V)

Series code (PJ)

PJ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
10	10×16	125	10×16	125	10×20	140
22	10×20	200	10×20	200	10×20	200
33	10×20	250	10×20	260	12.5×20	320
47	10×20	300	12.5×20	390	12.5×20	390
68	12.5×20	470	12.5×25	470	16×20	520
82	12.5×20	510	16×20	550	16×20	550
100	12.5×25	620	16×20	630	16×25	680
	16×20	630				
150	16×25	770	16×25	840	18×25	860
220	16×30	1020	18×25	1050	18×31.5	1130
330	18×31.5	1390	18×35.5	1430		

uF \ Vdc	350		400		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8	10×16	110	10×16	110	10×20	110
10	10×20	140	10×20	140	12.5×20	180
15			12.5×20	220	12.5×25	240
22	12.5×20	260	12.5×25	260	16×20	290
33	16×20	360	16×20	360	16×25	390
					18×20	380
47	16×25	430	16×25	470	18×25	480
			18×20	450		
68	16×30	560	18×25	585	18×31.5	630
	18×20	550				
82	18×25	610	18×30	610	18×35.5	715
100	18×30	700	18×31.5	765	18×40	800
120	18×31.5	830	18×35.5	865		
150	18×40	960	18×45	985		

uF \ Vdc	500	
	ΦD × L	RC
6.8	10×20	130
10	12.5×20	230
15	12.5×25	280
22	16×25	390
33	16×31.5	460
	18×25	450
47	18×31.5	555
68	18×35	690
82	18×40	770
100	18×50	880

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	100K
160 ~ 500	0.80	1.00	1.30	1.40	1.50


Three electrolytic capacitors are shown, each labeled with "150µF" and "400V". They are cylindrical components with two leads extending from the bottom.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

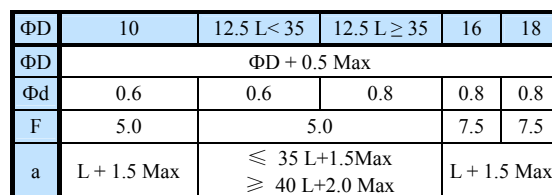

◆ **PART NUMBER SYSTEM(Example : 200V 82μF)**

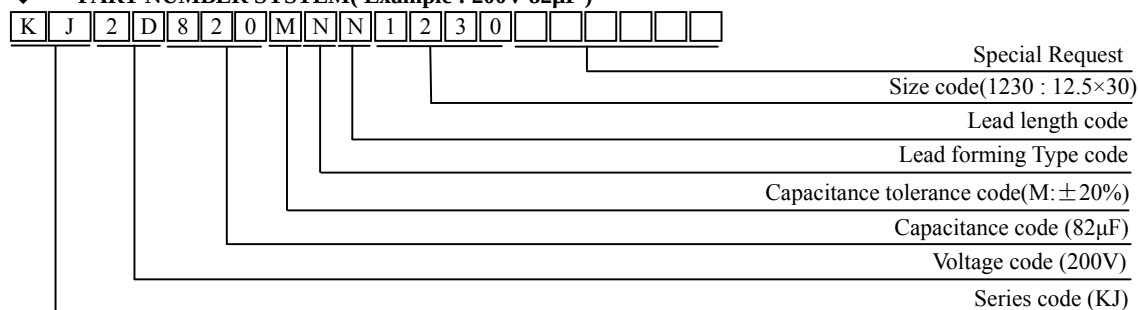

KJ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
10	10×16	150	10×16	150	10×20	160
22	10×20	210	10×20	210	10×20	215
33	10×20	265	10×20	270	10×25	330
47	10×25	330	12.5×20	405	12.5×25	405
68	12.5×20	485	12.5×25	475	16×20	530
82	12.5×25	520	12.5×30	560	16×25	565
100	12.5×30	625	16×20	640	16×30	690
	16×20	640				
150	16×25	785	16×25	855	18×30	875
220	16×30	1040	18×30	1055	18×35.5	1150
330	18×31.5	1400	18×35.5	1440	18×45	1455
470	18×40	1495	18×45	1530		
560	18×45	1535	18×50	1575		

uF \ Vdc	350		400		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8	10×16	125	10×16	125	10×20	125
10	10×20	150	10×20	150	12.5×20	190
15	10×20	205	12.5×20	235	12.5×25	255
22	12.5×20	270	12.5×25	275	12.5×30	308
33	16×20	370	16×20	370	16×25	400
					18×20	390
47	16×25	450	16×25	485	18×25	495
			18×20	460		
68	16×30	575	18×25	600	18×31.5	640
82	18×25	630	18×30	630	18×35.5	730
100	18×30	708	18×31.5	770	18×40	835
120	18×31.5	845	18×35.5	875	18×50	920
150	18×40	975	18×45	990		

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Cap(uF)	Frequency (Hz)			
	120	1K	10K	100K
<100	1.00	1.75	2.25	2.50
≥100	1.00	1.67	2.05	2.25

Three electrolytic capacitors are shown, each labeled with "47µF" and "450V". They are black cylindrical components with two leads extending from the bottom.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

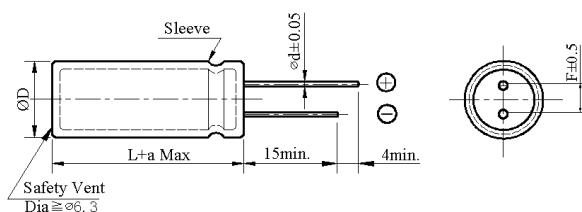

ΦD	10	12.5 L < 35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 450V 47μF)**

K	Y	2	W	4	7	0	M	N	N	1	8	N	3						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (KY)

KY Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
10	10×16	160	10×16	160	10×20	170
22	10×20	225	10×20	225	10×20	230
33	10×20	280	12.5×20	340	10×25	330
47	10×25	350	12.5×25	425	12.5×25	425
68	12.5×20	500	12.5×30	510	16×25	550
82	12.5×25	540	16×20	550	16×31.5	580
100	12.5×30	650	16×25	680	18×31.5	740
150	16×25	800	16×31.5	880	18×35.5	905
220	16×31.5	1075	18×35.5	1100	18×40	1195
330	18×35.5	1450	18×45	1500		
470	18×45	1540	18×50	1580		

uF \ Vdc	400		420		450	
	ΦD × L	ΦD × L	ΦD × L	RC	ΦD × L	RC
6.8	10×16	150	10×16	150	10×20	150
10	10×20	175	10×20	190	12.5×20	215
15	12.5×20	255	12.5×20	265	12.5×25	275
22	12.5×25	300	12.5×25	310	16×20	320
33	16×20	395	16×20	420	16×25	460
47	18×20	490	18×25	510	18×31.5	550
56	18×25	560	18×25	590	18×31.5	630
68	18×31.5	650	18×31.5	685	18×35.5	725
82	18×31.5	680	18×35.5	730	18×40	810
100	18×35.5	805	18×40	835	18×50	900
120	18×40	900	18×45	940		
150	18×45	1000				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap(uF)	Frequency (Hz)			
	120	1K	10K	100K
<100	1.00	1.75	2.25	2.50
≥100	1.00	1.67	2.05	2.25

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**



◆ **PART NUMBER SYSTEM(Example : 450V 150μF)**

Special Request

Size code(1850 : 18×50)

Lead length code

Lead forming Type code

Capacitance tolerance code(M: $\pm 20\%$)

Capacitance code (150μF)

Voltage code(450V)

Series code(MW)

MW Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
150			16×31.5	610	16×31.5	650
180			16×31.5	680	16×31.5	720
220	16×31.5	750	16×35.5	825	16×35.5	830
	18×31.5	850	18×31.5	860	18×31.5	870
330	16×40	1030	18×40	1092	18×40	1100
	18×35.5	1060				
470	18×45	1335	18×50	1410		

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68	16×25	455	16×31.5	520	16×35.5	530
			18×31.5	545	18×31.5	557
82	16×31.5	525	16×35.5	545	16×40	560
	18×25	535	18×31.5	560	18×35.5	578
100	16×35.5	590	16×40	620	18×40	683
	18×31.5	610	18×35.5	660		
120	16×40	690	18×40	755	18×45	778
	18×35.5	703				
150	18×40	805	18×45	787	18×50	840
180	18×45	925	18×50	998		

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)				
		50/60	120	1K	10K	100K
200 ~ 450	68 ~ 220	0.80	1.00	1.40	1.40	1.40
	330 ~ 470	0.90	1.00	1.13	1.13	1.13

- **High ripple current**
- **Low ESR**
- **Load life 5,000 hours at 105°C**



Item	Performance Characteristics										
Category Temperature Range	-25 ~ +105℃										
Working Voltage Range	200 ~ 450Vdc										
Capacitance Range	6.8 ~ 470 μF										
Capacitance Tolerance	±20% (at 25℃ and 120Hz)										
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>200 ~ 450</td></tr> <tr> <td>tanδ(Max)</td><td>0.15</td></tr> </table>	Rated Voltage (V)	200 ~ 450	tanδ(Max)	0.15						
Rated Voltage (V)	200 ~ 450										
tanδ(Max)	0.15										
Leakage Current	$I=0.03CV + 10\mu A$ I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes.										
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>200~250</td><td>350</td><td>400</td><td>420 ~ 450</td></tr> <tr> <td>Z(-25℃)/Z(+20℃)</td><td>3</td><td>5</td><td>5</td><td>6</td></tr> </table> (at 120Hz)	Rated voltage (V)	200~250	350	400	420 ~ 450	Z(-25℃)/Z(+20℃)	3	5	5	6
Rated voltage (V)	200~250	350	400	420 ~ 450							
Z(-25℃)/Z(+20℃)	3	5	5	6							
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105℃. <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ specified value</td></tr> </table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value				
Capacitance change	≒ ±20% of the initial value										
Dissipation factor(tanδ)	≒ 200% of the specified value										
Leakage current	≒ specified value										
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≒ 200% of the specified value</td></tr> </table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value				
Capacitance change	≒ ±20% of the initial value										
Dissipation factor(tanδ)	≒ 200% of the specified value										
Leakage current	≒ 200% of the specified value										
Others	Conforms to JIS-C-5101-4 (1998), characteristic W										

Sleeve

$\varnothing D$

$L+a \text{ Max}$

$\varnothing d \pm 0.05$

15min.

4min.


Safety Vent

$\text{Dia} \cong \varnothing 6, 8, 3$

$F \pm 0.5$

ΦD	10	12.5 L < 35	12.5 L ≥ 35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

M	V	2	V	1	0	1	M	N	N	1	8	P	1						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

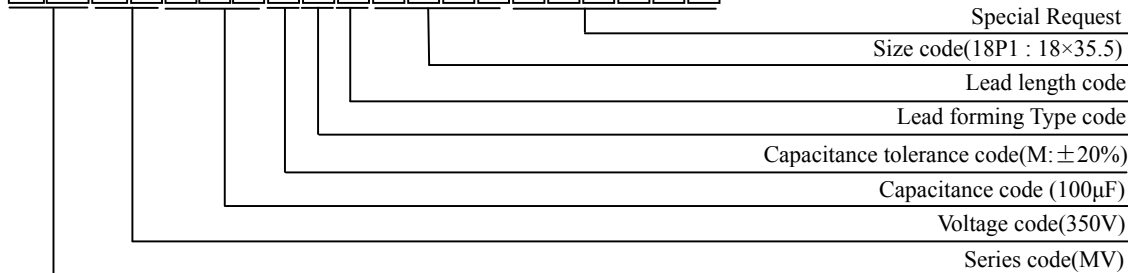

MV Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		250		350	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8					10×12.5	100
10	10×12.5	110	10×16	120	10×16	120
15	10×16	143	10×20	165	10×20	162
22	10×20	225	10×20	235	12.5×20	255
33	10×20	268	12.5×20	295	12.5×25	300
47	12.5×20	385	12.5×25	408	16×25	410
68	12.5×25	525	16×20	540	18×25	540
82	16×25	595	16×25	610	18×31.5	630
100	18×25	700	18×25	730	18×35.5	735
120	18×25	730	18×25	770	18×40	775
150	18×31.5	855	18×31.5	875	18×45	880
220	18×35.5	1010	18×35.5	1030		
330	18×40	1120	18×45	1130		
390	18×45	1240				
470	18×50	1400				

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8	10×12.5	105	10×16	105	10×20	115
10	10×16	120	10×20	130	12.5×20	140
15	12.5×16	180	12.5×20	180	12.5×20	190
22	12.5×20	260	12.5×25	275	12.5×25	290
33	16×20	300	16×25	320	16×25	355
47	16×25	390	16×31.5	430	18×25	460
68	16×31.5	540	16×35.5	550	18×31.5	590
82	18×31.5	650	18×31.5	675	18×35.5	695
100	18×35.5	735	18×35.5	740	18×40	782
120	18×35.5	760	18×40	805	18×45	840
150	18×45	895	18×50	915	18×50	965

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
200 ~ 350	0.80	1.00	1.20	1.30	1.40
400 ~ 450	0.80	1.00	1.15	1.25	1.35


- For electronic ballast circuits and long life
- Low ESR
- High ripple current
- Load life: 8,000 to 10,000 hours at 105°C

Item	Performance Characteristics					
Category Temperature Range	-25~ +105℃					
Working Voltage Range	200 ~ 450Vdc					
Capacitance Range	6.8 ~ 330 μF					
Capacitance Tolerance	±20% (at 25℃ and 120Hz)					
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)		200 ~ 450			
	tanδ(Max)		0.15			
Leakage Current	I=0.03CV + 10μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes					
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)		200~250	350	400	420 ~ 450
	Z(-25℃)/Z(+20℃)		3	5	5	6
	(at 120Hz)					
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 10,000 (8,000 hours for Φ 10) hours at 105℃.					
	Capacitance change		≒ ±20% of the initial value			
	Dissipation factor(tanδ)		≒ 200% of the specified value			
	Leakage current		≒ specified value			
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied.					
	Capacitance change		≒ ±20% of the initial value			
	Dissipation factor(tanδ)		≒ 200% of the specified value			
	Leakage current		≒ 200% of the specified value			
Others	Conforms to JIS-C-5101-4 (1998), characteristic W					

ΦD	10	12.5 L < 35	12.5 L ≥ 35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	≤ 35 L + 1.5 Max ≥ 40 L + 2.0 Max		L + 1.5 Max	

ΦD	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L + 1.5 Max	

M	J	2	E	2	2	1	M	N	N	1	8	N	3						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

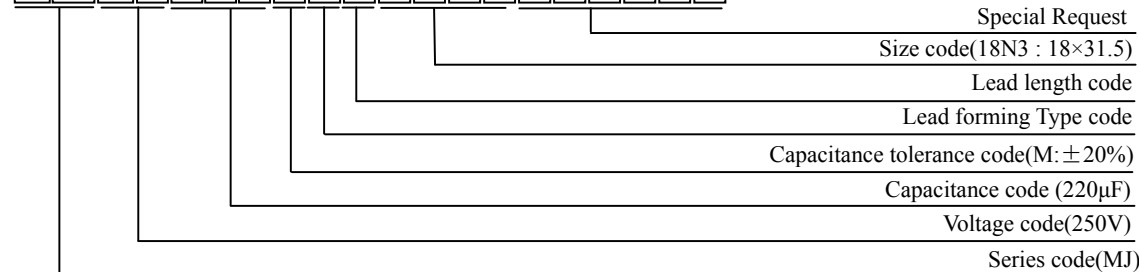

MJ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		250		350	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8					10×12.5	110
10	10×12.5	120	10×16	135	10×16	140
22	10×16	220	10×20	245	12.5×20	260
33	10×20	270	12.5×20	320	16×20	360
47	12.5×20	390	12.5×20	408	16×25	430
68	12.5×25	535	16×20	550	16×31.5	560
					18×20	550
82	16×20	595	16×20	610	18×25	610
100	16×20	630	16×25	680	18×31.5	700
120	16×25	750	16×31.5	790	18×31.5	830
150	16×25	840	18×25	860	18×40	960
220	18×25	1050	18×31.5	1130		
330	18×35.5	1430				

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
6.8	10×16	110	10×16	110	10×20	120
10	10×20	140	10×20	150	12.5×20	180
15	12.5×20	220	12.5×20	225	12.5×25	240
22	12.5×25	275	12.5×25	280	16×20	300
33	16×20	360	16×20	375	16×25	390
					18×20	380
47	16×25	470	18×20	465	18×25	480
	18×20	450				
68	18×25	585	18×31.5	595	18×31.5	630
82	18×31.5	660	18×31.5	670	18×35.5	715
100	18×31.5	765	18×35.5	775	18×40	800
120	18×35.5	865	18×40	875		
150	18×45	985	18×50	990		

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap(uF)	Frequency (Hz)			
	120	1K	10K	100K
6.8 ~ 82	1.00	1.75	2.25	2.50
100 ~ 330	1.00	1.67	1.75	2.25

- **Rated voltage range: 200 to 450Vdc, Capacitance: 18 to 270μF**
- **Load life 2,000 hours at 105°C**
- **Ideal for low profile power supply applications**



SPECIFICATIONS													
Item	Performance Characteristics												
Category Temperature Range	-40 ~ +105℃												
Working Voltage Range	200 ~ 400Vdc												
Capacitance Range	27 ~ 270 μF												
Capacitance Tolerance	±20% (at 25℃ and 120Hz)												
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>200</td> <td>400</td> <td>420</td> <td>450</td> </tr> <tr> <td>tanδ(Max)</td> <td>0.12</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> </tr> </table>	Rated Voltage (V)	200	400	420	450	tanδ(Max)	0.12	0.15	0.20	0.20		
Rated Voltage (V)	200	400	420	450									
tanδ(Max)	0.12	0.15	0.20	0.20									
Leakage Current	I=0.03CV + 10μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes												
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>200</td> <td>400</td> <td>420 ~ 450</td> </tr> <tr> <td>Z(-40℃)/Z(+20℃)</td> <td>6</td> <td>6</td> <td>—</td> </tr> <tr> <td>Z(-25℃)/Z(+20℃)</td> <td>3</td> <td>5</td> <td>6</td> </tr> </table> (at 120Hz)	Rated voltage (V)	200	400	420 ~ 450	Z(-40℃)/Z(+20℃)	6	6	—	Z(-25℃)/Z(+20℃)	3	5	6
Rated voltage (V)	200	400	420 ~ 450										
Z(-40℃)/Z(+20℃)	6	6	—										
Z(-25℃)/Z(+20℃)	3	5	6										
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃. <table border="1"> <tr> <td>Capacitance change</td> <td>≒ ±20% of the initial value</td> </tr> <tr> <td>Dissipation factor(tanδ)</td> <td>≒ 200% of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>≒ specified value</td> </tr> </table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value						
Capacitance change	≒ ±20% of the initial value												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ specified value												
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td> <td>≒ ±20% of the initial value</td> </tr> <tr> <td>Dissipation factor(tanδ)</td> <td>≒ 200% of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>≒ 200% of the specified value</td> </tr> </table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value						
Capacitance change	≒ ±20% of the initial value												
Dissipation factor(tanδ)	≒ 200% of the specified value												
Leakage current	≒ 200% of the specified value												
Others	Conforms to JIS-C-5101-4 (1998), characteristic W												

Technical drawing of a Safety Vent assembly. The drawing includes a side view and a top view.

Side View Dimensions:

- Overall diameter: $\varnothing D$
- Body length: $L+a \text{ Max}$
- Sleeve diameter: $\varnothing d \pm 0.05$
- Sleeve length: 15 min.
- Distance from end of body to sleeve end: 4 min.

Top View Dimensions:


- Overall diameter: $\varnothing D$
- Central hole diameter: $\varnothing d \pm 0.05$
- Distance from center of hole to edge of body: 4 min.

Labels:

- Sleeve
- Safety Vent
- Dia $\cong \varnothing 6.3$

ΦD	10	12.5 L<35	12.5 L $\geq$ 35	14.5
ΦD	$\Phi D + 0.5 \text{ Max}$			
Φd	0.6	0.6	0.8	0.8
F	5.0	5.0		7.5
a	L+ 1.5 Max	$\leq 35 \text{ L}+1.5\text{Max}$ $\geq 40 \text{ L}+2.0 \text{ Max}$		L+ 2.0 Max

P	Z	2	W	5	6	0	M	N	N	1	4	3	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

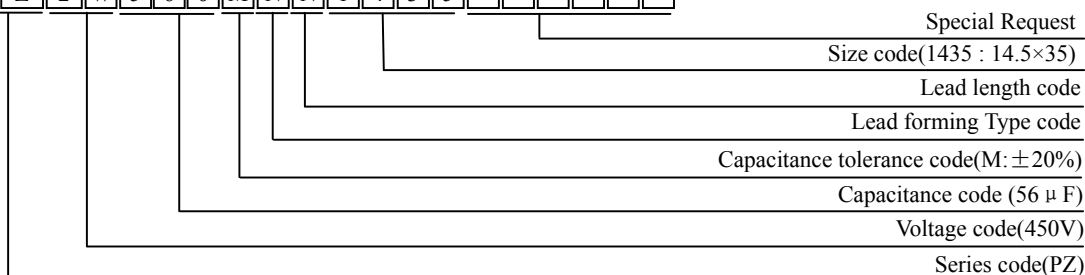

PZ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
18							10×30	190
22					10×30	205	10×35	215
27			10×30	240	10×35	245	10×40	250
33			10×35	270	10×40	280	12.5×30	300
39			10×40	295	10×45	295	10×50	315
			12.5×30	305	12.5×30	295	12.5×35	315
47			10×50	335	10×55	350	12.5×40	350
			12.5×35	335	12.5×35	350	14.5×30	350
56			12.5×40	380	12.5×40	390	14.5×35	395
					14.5×30	390		
68			12.5×50	435	12.5×50	440	12.5×50	400
			14.5×35	435	14.5×35	460	14.5×40	450
82	10×35	420	14.5×40	480	14.5×40	515	14.5×50	490
100	10×40	460	14.5×45	525	14.5×50	570		
120	10×50	530						
	12.5×30	530						
150	12.5×35	585						
180	12.5×40	675						
220	14.5×35	750						
270	14.5×40	865						


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers


Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
200 ~ 450	18 ~ 82	1.00	1.50	1.75	1.80
	100 ~ 270	1.00	1.30	1.40	1.50

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

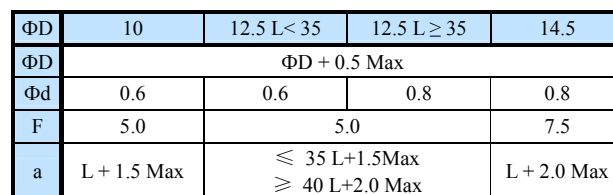

P	A	2	W	3	9	0	M	N	N	1	0	4	5					
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--

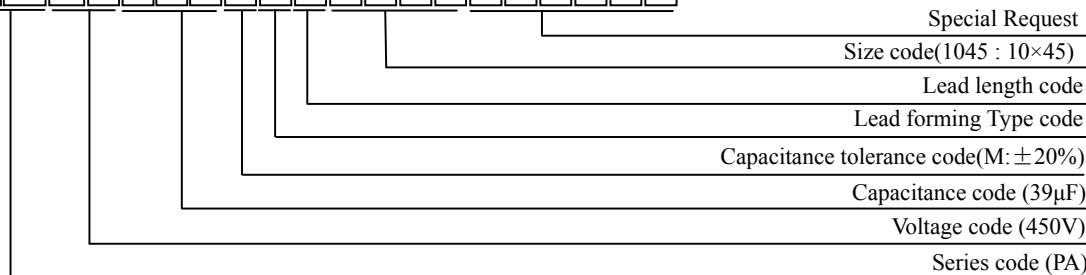

PA Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
33					10×50	340
39	10×45	370	10×50	360	10×55	380
47	10×50	420	10×55	430	12.5×40	440
56	10×55	470	12.5×40	480	12.5×45	490
68	12.5 ×40	540	14.5×40	520	12.5×50	550
					14.5×40	530
82	12.5×50	610	12.5×50	590	14.5×45	630
	14.5×40	570	14.5×45	590		
100	14.5×45	690	14.5×50	670	14.5×55	710
120	14.5×55	790				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60(50)	120	500	1K	≥10K
400 ~ 450	0.80	1.00	1.25	1.40	1.50

- **105°C Long Life (10,000 hours), Miniature size**
Body diameter of Φ10mm to Φ12.5mm with high ripple current capability




Item	Performance Characteristics														
Category Temperature Range	-25 ~ +105℃														
Working Voltage Range	200 ~ 450Vdc														
Capacitance Range	33 ~ 220 μF														
Capacitance Tolerance	±20% (at 25℃ and 120Hz)														
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>200</td><td>220</td><td>250</td><td>400</td><td>420</td><td>450</td></tr> <tr> <td>tanδ(Max)</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.25</td><td>0.25</td></tr> </table>	Rated Voltage (V)	200	220	250	400	420	450	tanδ(Max)	0.20	0.20	0.20	0.20	0.25	0.25
Rated Voltage (V)	200	220	250	400	420	450									
tanδ(Max)	0.20	0.20	0.20	0.20	0.25	0.25									
Leakage Current	$I=0.03CV + 10\mu A$ I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes														
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>200~250</td><td>400</td><td>420 ~ 450</td></tr> <tr> <td>Z(-25℃)/Z(+20℃)</td><td>3</td><td>5</td><td>6</td></tr> </table> (at 120Hz)	Rated voltage (V)	200~250	400	420 ~ 450	Z(-25℃)/Z(+20℃)	3	5	6						
Rated voltage (V)	200~250	400	420 ~ 450												
Z(-25℃)/Z(+20℃)	3	5	6												
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 10,000 hours at 105℃. <table border="1"> <tr> <td>Capacitance change</td><td>≧ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≧ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≧ specified value</td></tr> </table>	Capacitance change	≧ ±20% of the initial value	Dissipation factor(tanδ)	≧ 200% of the specified value	Leakage current	≧ specified value								
Capacitance change	≧ ±20% of the initial value														
Dissipation factor(tanδ)	≧ 200% of the specified value														
Leakage current	≧ specified value														
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≧ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≧ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≧ 200% of the specified value</td></tr> </table>	Capacitance change	≧ ±20% of the initial value	Dissipation factor(tanδ)	≧ 200% of the specified value	Leakage current	≧ 200% of the specified value								
Capacitance change	≧ ±20% of the initial value														
Dissipation factor(tanδ)	≧ 200% of the specified value														
Leakage current	≧ 200% of the specified value														
Others	Conforms to JIS-C-5101-4 (1998), characteristic W														

Technical drawing of a sleeve component. The drawing includes a side view and a cross-sectional view. The side view shows a cylindrical body with a diameter of ϕD and a length of $L+a$ Max. A sleeve is shown inserted into the body, with a diameter of $\phi d \pm 0.05$. The sleeve has a length of 15 min. and a diameter of $\phi 4$. The cross-sectional view shows the sleeve with a diameter of $\phi 4 \pm 0.5$. The sleeve is labeled "Sleeve". The side view is labeled "Safety Vent" and "Dia $\geq \phi 6.3$ ".

ΦD	10	12.5 L<35	12.5 L≥35
ΦD	ΦD + 0.5 Max		
Φd	0.6	0.6	0.8
F	5.0	5.0	
a	L + 1.5 Max	$\leq 35 L + 1.5 \text{Max}$ $\geq 40 L + 2.0 \text{Max}$	

P	Q	2	D	2	2	1	M	N	N	1	2	5	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

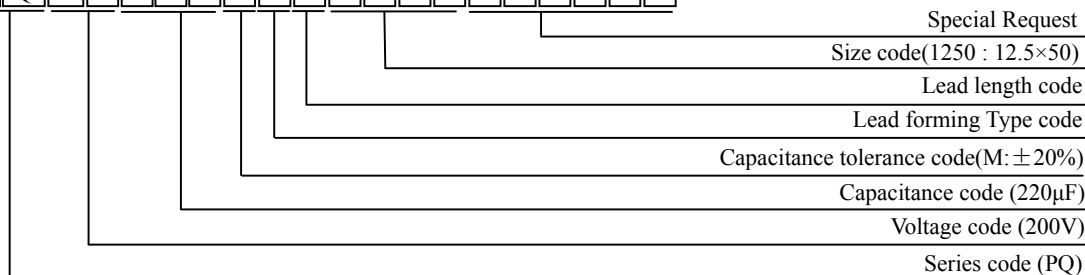

ALUMINUM ELECTROLYTIC CAPACITORS



PQ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×45	505
82			10×45	530	10×50	610
100	10×45	630	10×50	660	12.5×35	690
120	10×55	750	12.5×35	740	12.5×40	790
150	12.5×35	800	12.5×40	860	12.5×45	920
180	12.5×40	920	12.5×45	990		
220	12.5×50	1090				


uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
33			10×50	370	10×55	360
					12.5×30	370
39	10×50	400	10×55	410	12.5×35	420
			12.5×30	390		
47	10×55	450	12.5×35	450	12.5×40	480
	12.5×35	440				
56	12.5×40	500	12.5×40	520	12.5×45	530
68	12.5×45	580	12.5×50	580		
82	12.5×55	650				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60(50)	120	500	1K	≥10K
200 ~ 250	0.80	1.00	1.20	1.30	1.40
400 ~ 450	0.80	1.00	1.25	1.40	1.50

- **Low ESR**
- **Load life 2,000 hours at 105°C**
- **Ideal for low profile power supply applications**



Item	Performance Characteristics			
Category Temperature Range	-40 ~ +105℃		-25 ~ +105℃	
Working Voltage Range	200 ~ 400Vdc		420 ~ 450Vdc	
Capacitance Range	27 ~ 270 μF		18 ~ 100 μF	
Capacitance Tolerance	±20% (at 25℃ and 120Hz)			
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	200 ~ 450		
	tanδ(Max)	0.15		
Leakage Current	I=0.03CV + 10μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes			
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	200	400	420 ~ 450
	Z(-40℃)/Z(+20℃)	6	6	—
	Z(-25℃)/Z(+20℃)	3	5	6
	(at 120Hz)			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃.			
	Capacitance change	≧ ±20% of the initial value		
	Dissipation factor(tanδ)	≧ 200% of the specified value		
	Leakage current	≧ specified value		
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied.			
	Capacitance change	≧ ±20% of the initial value		
	Dissipation factor(tanδ)	≧ 200% of the specified value		
	Leakage current	≧ 200% of the specified value		
Others	Conforms to JIS-C-5101-4 (1998), characteristic W			

Technical drawing of a Safety Vent assembly. The drawing shows a side view and a top view.

Side View Dimensions:

- Overall diameter: $\varnothing D$
- Length of the main body: $L+a \text{ Max}$
- Flange thickness: 15 min.
- Flange diameter: $\varnothing d \pm 0.05$
- Sleeve diameter: 4 min.

Top View Dimensions:

- Overall diameter: $\varnothing D$
- Central hole diameter: $\varnothing d \pm 0.05$
- Sleeve diameter: $\varnothing d \pm 0.05$
- Sleeve length: 4 min.

Labels:

- Sleeve
- Safety Vent
- Dia $\cong \varnothing 6.3$

ΦD	10	12.5 L<35	12.5 L≥35	14.5
ΦD	ΦD + 0.5 Max			
Φd	0.6	0.6	0.8	0.8
F	5.0	5.0		7.5
a	L+ 1.5 Max	$\begin{matrix} \leq & 35 \text{ L}+1.5\text{Max} \\ \geq & 40 \text{ L}+2.0 \text{ Max} \end{matrix}$		L+ 2.0 Max

A diagram showing a 16-bit bus system. At the top, there are 16 input boxes. The first 14 boxes are labeled: M, Z, 2, G, 1, 0, 1, M, N, N, 1, 4, 4, 5. The last two boxes are empty. Below these boxes is a horizontal line representing the bus. Vertical lines connect each box to the bus line. The connections for the first 14 boxes are as follows: M (1st) connects to the bus; Z (2nd) connects to the bus; 2 (3rd) connects to the bus; G (4th) connects to the bus; 1 (5th) connects to the bus; 0 (6th) connects to the bus; 1 (7th) connects to the bus; M (8th) connects to the bus; N (9th) connects to the bus; N (10th) connects to the bus; 1 (11th) connects to the bus; 4 (12th) connects to the bus; 4 (13th) connects to the bus; 5 (14th) connects to the bus. The last two empty boxes do not have connections to the bus line.

MZ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
18							10×30	200
22					10×30	215	10×35	235
27			10×30	252	10×35	260	10×40	275
33			10×35	284	10×40	295	12.5×30	330
39			10×40	320	10×45	340	10×45	305
			12.5×30	315	12.5×30	330	12.5×30	295
47			10×50	355	10×55	375	12.5×35	350
			12.5×35	340	12.5×35	360	14.5×30	380
56			12.5×40	400	12.5×40	420	14.5×35	435
					14.5×30	410		
68			12.5×50	450	12.5×50	470	12.5×50	485
			14.5×35	430	14.5×35	455	14.5×40	470
82	10×35	440	14.5×40	505	14.5×40	540	14.5×50	560
100	10×40	480	14.5×45	550	14.5×50	600		
120	10×45	517						
	12.5×30	545						
150	12.5×35	614						
180	12.5×40	709						
220	14.5×35	785						
270	14.5×40	890						

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Cap(uF)	Frequency (Hz)			
		120	1K	10K	100K
200 ~ 450	18 ~ 82	1.00	1.50	1.75	1.80
	100 ~ 270	1.00	1.30	1.40	1.50

Four electrolytic capacitors, each labeled 68mF 400V.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

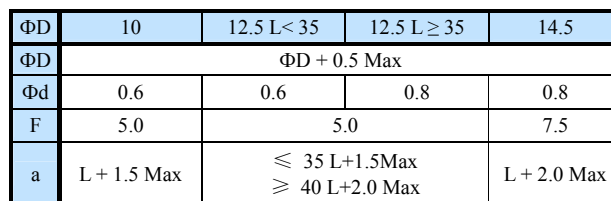

M	A	2	G	6	8	0	M	N	N	1	2	4	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--



MA Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
33					10×45	304
39	10×40	330	10×45	340	10×50	358
47	10×45	393	10×50	405	12.5×35	405
56	10×50	435	12.5×40	497	12.5×45	505
68	12.5 ×40	555	14.5×40	570	12.5×50	563
					14.5×40	547
82	12.5×50	628	12.5×50	635	14.5×45	650
	14.5×40	585	14.5×45	590		
100	14.5×45	710	14.5×50	728	14.5×50	708
120	14.5×55	813				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60(50)	120	500	1K	≥10K
400 ~ 450	0.80	1.00	1.25	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS



MQ Series


- Low ESR
- 105°C Long Life (10,000 hours), Miniature size
Body diameter of $\Phi 10\text{mm}$ to $\Phi 12.5\text{mm}$ with high ripple current capability



SPECIFICATIONS

Item	Performance Characteristics			
Category Temperature Range	-25 ~ +105℃			
Working Voltage Range	200 ~ 450Vdc			
Capacitance Range	33 ~ 220 μF			
Capacitance Tolerance	±20% (at 25℃ and 120Hz)			
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	200 ~ 250	400 ~ 450	
	tanδ(Max)	0.15	0.15	
Leakage Current	I=0.03CV + 10μA I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes			
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	200~250	400	420 ~ 450
	Z(-25℃)/Z(+20℃)	3	5	6
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 10,000 hours at 105℃.			
	Capacitance change		≒ ±20% of the initial value	
	Dissipation factor(tanδ)		≒ 200% of the specified value	
	Leakage current		≒ specified value	
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied.			
	Capacitance change		≒ ±20% of the initial value	
	VDissipation factor(tanδ)		≒ 200% of the specified value	
	Leakage current		≒ 200% of the specified value	
Others	Conforms to JIS-C-5101-4 (1998), characteristic W			

DIMENSIONS (mm)

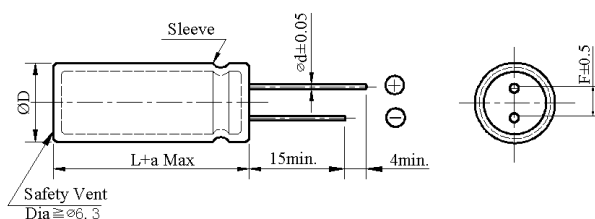

ΦD	10	12.5 L < 35	12.5 L ≥ 35
ΦD	$\Phi D + 0.5 \text{ Max}$		
Φd	0.6	0.6	0.8
F	5.0	5.0	
a	L + 1.5 Max	$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$	

PART NUMBER SYSTEM(Example : 450V 33 μF)

M Q 2 W 3 3 0 M N N 1 0 5 5

Special Request	
Size code(1055 : 10 $\times$ 55)	
Lead length code	
Lead forming Type code	
Capacitance tolerance code(M: $\pm 20\%$)	
Capacitance code (33 μF)	
Voltage code (450V)	
Series code (MQ)	

ALUMINUM ELECTROLYTIC CAPACITORS



MQ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×40	450
82			10×45	538	10×45	553
100	10×45	640	10×50	670	12.5×35	702
120	10×50	700	12.5×35	780	12.5×40	798
150	12.5×35	813	12.5×40	873	12.5×45	930
180	12.5×40	935	12.5×45	1002		
220	12.5×50	1100				

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
33			10×45	325	10×50	330
					12.5×30	373
39	10×45	350	10×50	378	12.5×35	425
			12.5×30	395		
47	10×50	407	12.5×35	455	12.5×40	490
	12.5×35	445				
56	12.5×40	508	12.5×40	524	12.5×45	538
68	12.5×45	585	12.5×50	592		
82	12.5×55	658				


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60(50)	120	500	1K	≥10K
200 ~ 250	0.80	1.00	1.20	1.30	1.40
400 ~ 450	0.80	1.00	1.25	1.40	1.50

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

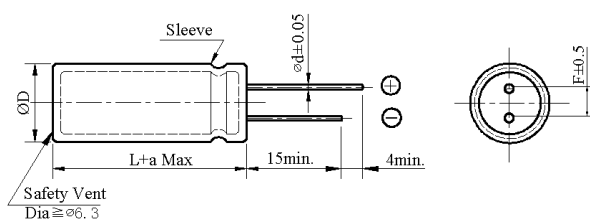

ΦD	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L +1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 450V 150μF)**

S	W	2	W	1	5	1	M	N	N	1	8	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

151

ALUMINUM ELECTROLYTIC CAPACITORS



SW Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×35	380	10×40	395
82			10×35	435	10×40	450	10×45	480
100	10×30	410	10×40	470	10×45	505	10×50	550
							12.5×35	530
120	10×35	500	10×45	535	10×50	580	12.5×40	565
					12.5×35	540		
150	10×40	575	12.5×35	610	12.5×40	620	12.5×45	635
180	10×50	640	12.5×40	700	12.5×45	715	12.5×50	740
	12.5×30	620					16×31.5	730
220	12.5×35	740	12.5×50	860	16×35.5	870	16×40	950
	16×25	725	16×31.5	825			18×30	920
270	12.5×45	860	16×35.5	860	16×40	930	16×45	1100
	16×30	830	18×30	855	18×30	910	18×35.5	1030
330	12.5×50	930	16×40	1150	16×45	1200	18×40	1300
	16×31.5	910	18×35.5	1200	18×35.5	1245		
	18×25	895						
470	18×31.5	1210	18×45	1380	18×45	1400	18×50	1460
560	18×35.5	1350	18×50	1500				
680	18×40	1460						

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22			10×30	210	10×30	225
27	10×30	250	10×35	260	10×35	280
33	10×35	275	10×40	290	10×40	305
39	10×40	305	10×45	315	10×50	330
47	10×45	330	10×50	350	12.5×40	390
	12.5×30	320	12.5×35	340		
56	12.5×35	375	12.5×40	395	12.5×45	450
68	12.5×40	455	12.5×45	480	12.5×50	570
			16×31.5	470	16×35.5	560
82	12.5×50	535	16×35.5	560	16×40	630
	16×31.5	530			18×31.5	605
100	16×35.5	615	16×40	670	16×45	740
			18×31.5	655	18×35.5	720
120	16×40	730	18×35.5	750	18×40	805
	18×31.5	700				
150	18×40	845	18×45	900	18×45	950
180	18×45	950	18×50	1040		
220	18×50	1100				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
160 ~ 450	0.80	1.00	1.30	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS



SQ Series


- Counter-plan product for safety
- Load life 5,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics													
Category Temperature Range	-25 ~ +105℃													
Working Voltage Range	160 ~ 450Vdc													
Capacitance Range	22 ~ 680 μF													
Capacitance Tolerance	±20% (at 25℃ and 120Hz)													
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>160 ~ 250</td><td colspan="2">400 ~ 450</td></tr><tr><td>tanδ(Max)</td><td>0.12</td><td colspan="2">0.15</td></tr></table>				Rated Voltage (V)	160 ~ 250	400 ~ 450		tanδ(Max)	0.12	0.15			
Rated Voltage (V)	160 ~ 250	400 ~ 450												
tanδ(Max)	0.12	0.15												
Leakage Current	I=0.02CV or 3000 μA whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) . Impress the rated voltage for 2 minutes													
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>160~250</td><td>400</td><td colspan="2">420 ~ 450</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>3</td><td>5</td><td colspan="2">6</td></tr></table> (at 120Hz)				Rated voltage (V)	160~250	400	420 ~ 450		Z(-25℃)/Z(+20℃)	3	5	6	
Rated voltage (V)	160~250	400	420 ~ 450											
Z(-25℃)/Z(+20℃)	3	5	6											
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>				Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value				
Capacitance change	≒ ±20% of the initial value													
Dissipation factor(tanδ)	≒ 200% of the specified value													
Leakage current	≒ specified value													
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>				Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value				
Capacitance change	≒ ±20% of the initial value													
Dissipation factor(tanδ)	≒ 200% of the specified value													
Leakage current	≒ 200% of the specified value													
Others	Conforms to JIS-C-5101-4 (1998), characteristic W													

DIMENSIONS (mm)

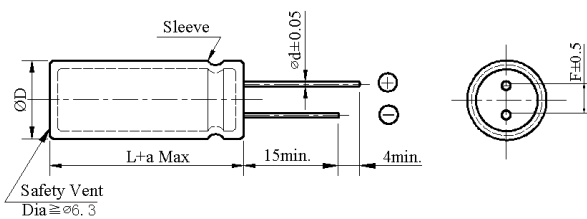

ΦD	10	12.5 L < 35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5$ Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	≤ 35 L + 1.5 Max ≥ 40 L + 2.0 Max		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 450V 47 μ F)

S Q 2 W 4 7 0 M N N 1 2 4 5

Special Request	
Size code(1245 : 12.5x45)	
Lead length code	
Lead forming Type code	
Capacitance tolerance code(M: $\pm 20\%$)	
Capacitance code (47 μ F)	
Voltage code (450V)	
Series code (SQ)	

SQ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×35	410	10×40	425
82			10×35	450	10×40	465	10×45	485
100	10×30	425	10×40	485	10×45	520	12.5×35	550
120	10×35	510	10×45	545	10×50	590	12.5×40	575
					12.5×35	560		
150	10×40	590	12.5×35	630	12.5×40	645	12.5×50	655
	12.5×30	570						
180	10×50	655	12.5×45	725	12.5×50	740	16×35.5	770
	12.5×35	640						
220	12.5×40	770	12.5×50	880	16×35.5	900	16×40	965
	16×25	735	16×31.5	865			18×31.5	950
270	12.5×45	880	16×40	890	16×40	960	16×50	1120
	16×30	860	18×30	875	18×31.5	935	18×40	1070
330	12.5×50	945	16×45	1180	16×50	1240	18×45	1350
	16×35.5	930	18×35.5	1250	18×40	1280		
	18×30	920						
470	18×35.5	1240	18×45	1410	18×50	1440		
560	18×40	1375	18×50	1520				
680	18×45	1480						

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22			10×30	220	10×35	235
27	10×30	265	10×35	270	10×40	290
33	10×35	280	10×40	305	10×45	315
39	10×40	315	10×45	325	10×50	350
					12.5×40	335
47	10×45	350	10×50	370	12.5×45	405
	12.5×35	340	12.5×40	360		
56	12.5×40	385	12.5×45	405	12.5×50	470
68	12.5×45	465	12.5×50	490	16×40	590
			16×35.5	485		
82	12.5×50	555	16×40	590	16×45	650
	16×35.5	545			18×35.5	630
100	16×40	630	16×45	695	16×50	770
			18×35.5	680	18×40	750
120	16×45	760	18×40	775	18×45	835
	18×35.5	735				
150	18×40	870	18×45	930	18×50	980
180	18×45	980	18×50	1070		


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
160 ~ 250	0.80	1.00	1.20	1.30	1.40
400 ~ 450	0.80	1.00	1.15	1.25	1.35

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

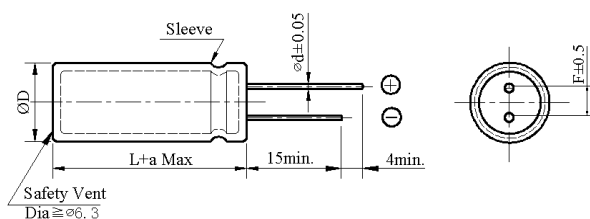

ΦD	10	12.5 L<35	12.5 L≥35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	$\leq 35 L + 1.5 \text{Max}$ $\geq 40 L + 2.0 \text{Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 160V 560μF)**

S	P	2	C	5	6	1	M	N	N	1	8	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (SP)

SP Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×40	425	10×45	440
82			10×40	460	10×45	480	10×50	505
100	10×35	445	10×45	490	10×50	545	12.5×40	570
120	10×40	525	10×50	555	12.5×40	580	12.5×50	610
							16×30	590
150	10×50	610	12.5×40	650	12.5×45	670	16×35.5	735
	12.5×35	595						
180	12.5×40	670	12.5×45	745	12.5×50	765	16×40	820
220	12.5×45	785	12.5×50	900	16×40	930	16×50	1050
	16×30	760	16×35.5	885			18×40	1010
270	12.5×50	905	16×40	910	16×45	990	18×45	1120
	16×35.5	880	18×31.5	890	18×35.5	975		
	18×30	870						
330	16×40	960	16×45	1210	16×50	1270	18×50	1380
	18×31.5	945	18×35.5	1285	18×40	1300		
470	18×40	1270	18×45	1450	18×50	1475		
560	18×45	1400	18×50	1550				
680	18×50	1520						

Vdc uF	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22			10×35	240	10×40	260
27	10×35	280	10×40	285	10×45	310
33	10×40	295	10×45	320	10×50	340
					12.5×35	330
39	10×45	325	10×50	345	12.5×40	365
47	10×50	370	12.5×40	385	12.5×45	440
	12.5×35	360				
56	12.5×40	400	12.5×45	420	12.5×50	510
68	12.5×45	475	12.5×50	520	16×40	630
			16×35.5	515		
82	12.5×50	580	16×40	620	16×45	690
	16×35.5	575			18×35.5	670
100	16×40	655	16×45	730	18×40	800
	18×31.5	635	18×35.5	715		
120	16×45	780	18×45	800	18×50	880
	18×40	765				
150	18×45	890	18×50	955		
180	18×50	1000				

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
160 ~ 450	0.80	1.00	1.30	1.40	1.50

Three electrolytic capacitors are shown, each labeled with "150µF" and "450V". They are black cylindrical components with two leads extending from the bottom.

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

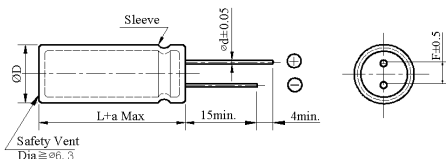

ΦD	10	12.5 L < 35	12.5 L $\geq$ 35	16	18
ΦD	$\Phi D + 0.5 \text{ Max}$				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 450V 150μF)**

V	W	2	W	1	5	1	M	N	N	1	8	4	5					
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--

Series code (VW)

ALUMINUM ELECTROLYTIC CAPACITORS



VW Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×35	365	10×40	380
82			10×35	420	10×40	435	10×45	460
100	10×30	395	10×40	450	10×45	480	10×50	530
							12.5×35	510
120	10×35	480	10×45	515	10×50	555	12.5×40	545
					12.5×35	520		
150	10×40	555	12.5×35	585	12.5×40	595	12.5×45	610
180	10×50	615	12.5×40	670	12.5×45	685	12.5×50	710
	12.5×30	595					16×31.5	700
220	12.5×35	710	12.5×50	830	16×35.5	840	16×40	915
	16×25	695	16×31.5	795			18×30	880
270	12.5×45	825	16×35.5	825	16×40	900	16×45	1060
	16×30	800	18×30	820	18×30	875	18×35.5	990
330	12.5×50	890	16×40	1105	16×45	1150	18×40	1250
	16×31.5	875	18×35.5	1150	18×35.5	1195		
	18×25	860						
470	18×31.5	1160	18×45	1325	18×45	1350	18×50	1400
560	18×35.5	1295	18×50	1440				
680	18×40	1400						

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22			10×30	202	10×30	215
27	10×30	240	10×35	250	10×35	270
33	10×35	265	10×40	280	10×40	295
39	10×40	290	10×45	305	10×50	320
47	10×45	320	10×50	335	12.5×40	375
	12.5×30	310	12.5×35	325		
56	12.5×35	360	12.5×40	380	12.5×45	430
68	12.5×40	435	12.5×45	460	12.5×50	545
			16×31.5	450	16×35.5	535
82	12.5×50	515	16×35.5	540	16×40	605
	16×31.5	510			18×31.5	580
100	16×35.5	590	16×40	645	16×45	710
			18×31.5	630	18×35.5	690
120	16×40	700	18×35.5	720	18×40	775
	18×31.5	675				
150	18×40	810	18×45	865	18×45	920
180	18×45	915	18×50	1000		
220	18×50	1055				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
160 ~ 450	0.80	1.00	1.30	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS






VQ Series


- Capacitor For Over Voltage Application
- Load life 5,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics															
Category Temperature Range	-25 ~ +105℃															
Working Voltage Range	160 ~ 450Vdc															
Capacitance Range	22 ~ 680 μF															
Capacitance Tolerance	±20% (at 25℃ and 120Hz)															
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>160 ~ 250</td><td colspan="2">400 ~ 450</td></tr><tr><td>tanδ(Max)</td><td>0.12</td><td colspan="2">0.15</td></tr></table>				Rated Voltage (V)	160 ~ 250	400 ~ 450		tanδ(Max)	0.12	0.15					
Rated Voltage (V)	160 ~ 250	400 ~ 450														
tanδ(Max)	0.12	0.15														
Leakage Current	I=0.02CV or 3000 μA whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 2 minutes															
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>160~250</td><td>400</td><td>420 ~ 450</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>3</td><td>5</td><td>6</td></tr></table> (at 120Hz)				Rated voltage (V)	160~250	400	420 ~ 450	Z(-25℃)/Z(+20℃)	3	5	6				
Rated voltage (V)	160~250	400	420 ~ 450													
Z(-25℃)/Z(+20℃)	3	5	6													
Charge and Discharge	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to charge and discharge test with the voltage waveform shown below at room temperature(15 to 35℃) <table><tr><td>Frequency</td><td>Number of cycles</td><td>Voltage waveform</td></tr><tr><td>5Hz</td><td>200million times</td><td> Rated voltage  0V 1 cycle </td></tr></table> <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>				Frequency	Number of cycles	Voltage waveform	5Hz	200million times	Rated voltage  0V 1 cycle	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value
Frequency	Number of cycles	Voltage waveform														
5Hz	200million times	Rated voltage  0V 1 cycle														
Capacitance change	≒ ±20% of the initial value															
Dissipation factor(tanδ)	≒ 200% of the specified value															
Leakage current	≒ specified value															
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>				Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value						
Capacitance change	≒ ±20% of the initial value															
Dissipation factor(tanδ)	≒ 200% of the specified value															
Leakage current	≒ specified value															
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>				Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value						
Capacitance change	≒ ±20% of the initial value															
Dissipation factor(tanδ)	≒ 200% of the specified value															
Leakage current	≒ 200% of the specified value															
Others	Conforms to JIS-C-5101-4 (1998), characteristic W															

DIMENSIONS (mm)



ΦD	10	12.5 L < 35	12.5 L ≥ 35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	≤ 35 L+1.5Max ≥ 40 L+2.0 Max		L + 1.5 Max	

PART NUMBER SYSTEM(Example : 450V 47μF)

V	Q	2	W	4	7	0	M	N	N	1	2	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(1245 : 12.5×45)

Lead length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (47μF)

Voltage code (450V)

Series code (VQ)

ALUMINUM ELECTROLYTIC CAPACITORS



VQ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×35	395	10×40	410
82			10×35	430	10×40	445	10×45	465
100	10×30	410	10×40	465	10×45	500	12.5×35	530
120	10×35	490	10×45	520	10×50	565	12.5×40	555
					12.5×35	540		
150	10×40	565	12.5×35	605	12.5×40	620	12.5×50	630
	12.5×30	545						
180	10×50	630	12.5×45	700	12.5×50	710	16×35.5	740
	12.5×35	615						
220	12.5×40	740	12.5×50	845	16×35.5	865	16×40	925
	16×25	705	16×31.5	830			18×31.5	910
270	12.5×45	845	16×40	855	16×40	920	16×50	1080
	16×30	825	18×30	840	18×31.5	900	18×40	1025
330	12.5×50	910	16×45	1135	16×50	1190	18×45	1300
	16×35.5	900	18×35.5	1200	18×40	1230		
	18×30	890						
470	18×35.5	1190	18×45	1355	18×50	1385		
560	18×40	1320	18×50	1460				
680	18×45	1425						

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22			10×30	210	10×35	225
27	10×30	255	10×35	260	10×40	280
33	10×35	270	10×40	295	10×45	300
39	10×40	300	10×45	310	10×50	335
					12.5×40	320
47	10×45	335	10×50	355	12.5×45	390
	12.5×35	325	12.5×40	345		
56	12.5×40	370	12.5×45	390	12.5×50	450
68	12.5×45	445	12.5×50	470	16×40	565
			16×35.5	465		
82	12.5×50	535	16×40	565	16×45	630
	16×35.5	520			18×35.5	610
100	16×40	605	16×45	670	16×50	740
			18×35.5	655	18×40	720
120	16×45	730	18×40	750	18×45	805
	18×35.5	705				
150	18×40	835	18×45	900	18×50	950
180	18×45	940	18×50	1030		

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
160 ~ 250	0.80	1.00	1.20	1.30	1.40
400 ~ 450	0.80	1.00	1.15	1.25	1.35

Three electrolytic capacitors are shown, each labeled with "120µF" and "420V". They are black cylindrical components with two leads extending from the bottom.

- ## ◆ SPECIFICATIONS

◆ DIMENSIONS (mm)



ΦD	10	12.5 L< 35	12.5 L≥ 35	16	18
ΦD	ΦD + 0.5 Max				
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0		7.5	7.5
a	L + 1.5 Max	$\leq 35 \text{ L} + 1.5 \text{ Max}$ $\geq 40 \text{ L} + 2.0 \text{ Max}$		L + 1.5 Max	

◆ **PART NUMBER SYSTEM(Example : 160V 560μF)**

V	J	2	C	5	6	1	M	N	N	1	8	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Series code (VJ)

ALUMINUM ELECTROLYTIC CAPACITORS



VJ Series

◆ Case size & Permissible rated ripple current: (mA rms) at 105°C / 120Hz

uF \ Vdc	160		200		220		250	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
68					10×40	410	10×45	425
82			10×40	440	10×45	460	10×50	480
100	10×35	430	10×45	470	10×50	525	12.5×40	550
120	10×40	505	10×50	535	12.5×40	560	12.5×50	590
							16×30	570
150	10×50	585	12.5×40	630	12.5×45	645	16×35.5	710
	12.5×35	570						
180	12.5×40	650	12.5×45	715	12.5×50	740	16×40	790
220	12.5×45	755	12.5×50	865	16×40	895	16×50	1005
	16×30	730	16×35.5	850			18×40	970
270	12.5×50	870	16×40	875	16×45	950	18×45	1080
	16×35.5	845	18×31.5	860	18×35.5	940		
	18×30	835						
330	16×40	920	16×45	1165	16×50	1220	18×50	1330
	18×31.5	905	18×35.5	1240	18×40	1250		
470	18×40	1220	18×45	1400	18×50	1420		
560	18×45	1345	18×50	1490				
680	18×50	1460						

uF \ Vdc	400		420		450	
	ΦD × L	RC	ΦD × L	RC	ΦD × L	RC
22			10×35	230	10×40	250
27	10×35	270	10×40	275	10×45	300
33	10×40	285	10×45	310	10×50	325
					12.5×35	315
39	10×45	310	10×50	330	12.5×40	350
47	10×50	355	12.5×40	370	12.5×45	420
	12.5×35	345				
56	12.5×40	380	12.5×45	400	12.5×50	490
68	12.5×45	460	12.5×50	500	16×40	605
			16×35.5	490		
82	12.5×50	560	16×40	595	16×45	660
	16×35.5	550			18×35.5	640
100	16×40	630	16×45	700	18×40	770
	18×31.5	610	18×35.5	685		
120	16×45	750	18×45	770	18×50	845
	18×40	735				
150	18×45	855	18×50	920		
180	18×50	960				

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
160 ~ 450	0.80	1.00	1.30	1.40	1.50

ALUMINUM ELECTROLYTIC CAPACITORS



PART NUMBER SYSTEM (II)

◆ SNAP-IN TYPE

Series	Rated Voltage	Capacitance	Tolerance	Lead Forming Type	Lead Length	Case Dimension	Special Request
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)

(1) Series

Series	GM	GR	GSF	GVF	PM	PL	PK	PT	PG	PO	PI
	TG	GD	PX								

(2) Rated Voltage

Code	1C	1E	1F	1V	1H	1J	1K	2A	2C	2Z	2D	2P	2E	2V	2G	2S	2W	2H
WV	16	25	30	35	50	63	80	100	160	180	200	220	250	350	400	420	450	500

(3) Capacitance

Code	470	101	471	102	472	473	683
μF	47	100	470	1000	4700	47000	68000

(4) Capacitance Tolerance

Code	J	Q	R	K	V	M	H
%	± 5	+30 / -10	+20 / -0	± 10	+20 / -10	± 20	+20 / -5

(5) Lead Forming Type

Code	K	N	R
Description	Four Terminals	Snap-in Terminal	Forming & Cutting

(6) Terminal Length

Code	D	4	N	6
Length	4.0	4.5	5.5	6.3
Tolerance	±0.5	±0.5	±0.5	±1.0

(7) Case Dimension

Code	2225	2530	2545	2550	3035	3540	3550
Size	22 x 25	25 x 30	25 x 45	25 x 50	30 x 35	35 x 40	35 x 50

(8) Special Request

Code	R	F	L	D
Description	High Rated ripple current	Endurance	Low Leakage Current	Low Dissipation Factor
Code	H	E	P	---
Description	High Temperature	Low Impedance & ESR	PET Sleeve	---

ALUMINUM ELECTROLYTIC CAPACITORS



GM Series

- Large size for PCB board mounting hole





SPECIFICATIONS

Item	Performance Characteristics	
Category Temperature Range	-40 ~ +85°C	-25 ~ +85°C
Working Voltage Range	16 ~ 100Vdc	160 ~ 500Vdc
Capacitance Range	820 ~ 68,000µF	56 ~ 2,700 µF
Capacitance Tolerance	±20% (at 25°C and 120Hz)	
Dissipation Factor (tanδ) (at 25°C, 120Hz)	Rated Voltage (V)	16 25 35 50 63 80 ~ 100 160 ~ 250 350 ~ 450 500
	tanδ(Max)	0.35 0.35 0.25 0.25 0.25 0.20 0.15 0.15 0.20
	The above values should be increased by 0.02 for every additional 1000µF	
Leakage Current	I=0.02CV or 3000µA, whichever is smaller I : Leakage current (µA) C : Rated capacitance (µF) V : Rated voltage (V) Impress the rated voltage for 5 minutes	
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	16 25 35 50 63 80 100 160 ~ 250 350 400 420 ~ 450 500
	Z(-40°C)/Z(+20°C)	15 10 8 6 6 5 5 — — — — —
	Z(-25°C)/Z(+20°C)	— — — — — — — 4 4 4 8 8 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.	
Shelf Life	Capacitance change	≒ ±20% of the initial value
	Dissipation factor(tanδ)	≒ 200% of the specified value
	Leakage current	≒ specified value
Others	The following requirements shall be satisfied when the capacitor are restored to 25°C after exposing them for 1,000 hours at 85°C without voltage applied.	
	Capacitance change	≒ ±20% of the initial value
	Dissipation factor(tanδ)	≒ 200% of the specified value
	Leakage current	≒ 200% of the specified value
	Conforms to JIS-C-5101-4 (1998), characteristic W	

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

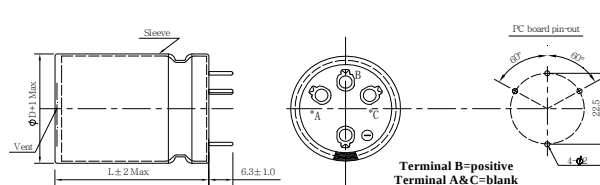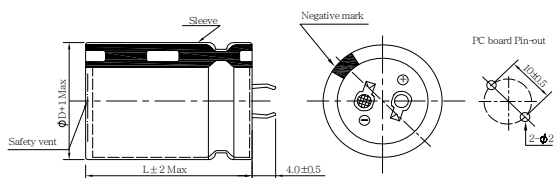

PART NUMBER SYSTEM(Example : 400V 470µF)

G M 2 G 4 7 1 M N D 3 0 5 1

Special Request

Size code(3051 : 30×51)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code(470µF)

Voltage code(400V)

Series code (GM)

ALUMINUM ELECTROLYTIC CAPACITORS



GM Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

Vdc ΦD uF	16								Vdc ΦD uF	25							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
8200	22×25	2455							4700								
10000	22×25	2710							5600	22×25	2165						
12000	22×30	2890	25×25	2890					6800	22×30	2500	25×25	2500				
15000	22×35	3390	25×30	3390	30×25	3390			8200	22×35	2740	25×25	2740				
18000	22×40	3900	25×35	3900	30×25	3900			10000	22×40	3055	25×30	3055	30×25	3055		
22000	22×50	4170	25×40	4170	30×30	4170	35×25	4170	12000	22×45	3410	25×35	3410	30×30	3410	35×25	3410
27000			25×45	4625	30×35	4625	35×30	4625	15000	22×50	3920	25×40	3920	30×30	3920	35×25	3920
33000			25×50	5250	30×40	5250	35×30	5250	18000			25×45	4370	30×35	4370	35×30	4370
39000					30×45	5885	35×35	5885	22000			25×50	5050	30×45	5050	35×35	5050
47000					30×50	6650	35×40	6650	27000					30×50	5820	35×40	5820
56000							35×45	7465	33000							35×45	6615
68000							35×50	8455	39000							35×50	7400

Vdc ΦD uF	35								Vdc ΦD uF	50							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
3900	22×25	2175							2200	22×25	1870						
4700	22×30	2370	25×25	2370					3300	22×30	2330	25×25	2330				
5600	22×35	2695	25×25	2695					3900	22×35	2595	25×30	2595	30×25	2595		
6800	22×40	2740	25×30	2740	30×25	2740			4700	22×40	2750	25×35	2750	30×25	2750		
8200	22×45	3065	25×35	3065	30×30	3065	35×25	3065	5600	22×45	3300	25×35	3300	30×30	3300	35×25	3300
10000	22×50	3495	25×40	3495	30×30	3495	35×25	3495	6800	22×50	3730	25×40	3730	30×35	3730	35×30	3730
12000			25×45	3925	30×35	3925	35×30	3925	8200			25×50	4270	30×40	4270	35×30	4270
15000			25×50	4445	30×40	4445	35×35	4445	10000					30×45	4870	35×35	4870
18000					30×45	5425	35×40	5425	12000					30×50	5485	35×40	5485
22000					30×50	5915	35×45	5915	15000							35×45	6310
27000							35×50	6750	18000							35×50	6575

Vdc ΦD uF	63								Vdc ΦD uF	80							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1500									1200	22×25	1655						
1800	22×25	1780							1500	22×25	1840						
2200	22×30	2260	25×25	2260					1800	22×30	2210	25×25	2210				
2700	22×35	2350	25×25	2350					2200	22×35	2410	25×30	2410	30×25	2410		
3300	22×35	2585	25×30	2585	30×25	2585			2700	22×40	2720	25×35	2720	30×25	2720		
3900	22×40	2940	25×35	2940	30×30	2940	35×25	2940	3300	22×45	3145	25×40	3145	30×30	3145	35×25	3145
4700	22×50	3290	25×40	3290	30×30	3290	35×25	3290	3900	22×50	3430	25×45	3430	30×35	3430	35×25	3430
5600			25×45	3690	30×35	3690	35×30	3690	4700			25×50	3965	30×40	3965	35×30	3965
6800			25×50	4180	30×40	4180	35×30	4180	5600					30×45	4455	35×35	4455
8200					30×45	4730	35×35	4730	6800					30×50	5050	35×40	5050
10000					30×50	5280	35×40	5280	8200							35×45	5710
12000							35×45	6065	10000							35×50	6495

ALUMINUM ELECTROLYTIC CAPACITORS



GM Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

uF	ΦD	100								uF	ΦD	160							
		Φ 22		Φ 25		Φ 30		Φ 35				Φ 22		Φ 25		Φ 30		Φ 35	
		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC			ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
820	22×25	1650							330	22×25	1050								
1200	22×30	1890	25×25	1890					390	22×25	1310								
1500	22×35	2080	25×30	2080	30×25	2080			470	22×30	1600	25×25	1600						
1800	22×40	2470	25×35	2470	30×25	2470			560	22×35	1810	25×25	1810						
2200	22×45	2850	25×40	2850	30×30	2850	35×25	2850	680	22×40	2250	25×30	2250	30×25	2250				
2700	22×50	3180	25×45	3180	30×35	3180	35×30	3180	820	22×45	2510	25×35	2510	30×30	2510	35×25	2510		
3300			25×50	3650	30×40	3650	35×30	3650	1000	22×50	2780	25×40	2780	30×30	2780	35×25	2780		
3900					30×45	4050	35×35	4050	1200			25×45	3050	30×35	3050	35×30	3050		
4700					30×50	4300	35×40	4300	1500			25×50	3210	30×45	3210	35×35	3210		
5600							35×45	4650	1800					30×50	3800	35×40	3800		
6800							35×50	5150	2200							35×45	4150		
8200									2700							35×50	4780		

uF	ΦD	200								uF	ΦD	220							
		Φ 22		Φ 25		Φ 30		Φ 35				Φ 22		Φ 25		Φ 30		Φ 35	
		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC			ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×25	1180							220	22×25	1130								
330	22×30	1350	25×25	1350					270	22×25	1200	25×25	1200						
390	22×30	1410	25×25	1410					330	22×30	1410	25×25	1410						
470	22×35	1650	25×30	1650	30×25	1650			390	22×35	1580	25×30	1580	30×25	1580				
560	22×40	1980	25×35	1980	30×25	1980			470	22×40	1800	25×35	1800	30×25	1800				
680	22×45	2450	25×40	2450	30×30	2450	35×25	2450	560	22×45	2030	25×40	2030	30×30	2030	35×25	2030		
820			25×45	2690	30×35	2690	35×25	2690	680	22×50	2330	25×45	2330	30×35	2330	35×25	2330		
1000			25×50	2900	30×40	2900	35×30	2900	820			25×50	2560	30×40	2560	35×30	2560		
1200					30×45	3200	35×35	3200	1000					30×45	2850	35×35	2850		
1500					30×50	3650	35×40	3650	1200					30×50	3130	35×40	3130		
1800							35×45	3870	1500							35×45	3750		
2200							35×50	4100	1800							35×50	3900		

uF	ΦD	250								uF	ΦD	400							
		Φ 22		Φ 25		Φ 30		Φ 35				Φ 22		Φ 25		Φ 30		Φ 35	
		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC			ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
180	22×25	1050							82	22×25	750								
220	22×25	1160							100	22×30	880	25×25	880						
270	22×30	1240	25×25	1240					120	22×35	1050	25×25	1050						
330	22×35	1580	25×30	1580	30×25	1580			150	22×40	1150	25×30	1150	30×25	1150				
390	22×40	1760	25×35	1760	30×25	1760			180	22×45	1400	25×35	1400	30×30	1400	35×25	1400		
470	22×45	1910	25×35	1910	30×30	1910	35×25	1910	220	22×45	1530	25×40	1530	30×30	1530	35×25	1530		
560	22×50	2080	25×40	2080	30×35	2080	35×25	2080	270	22×50	1650	25×45	1650	30×35	1650	35×30	1650		
680			25×50	2260	30×40	2260	35×30	2260	330			25×50	1850	30×40	1850	35×30	1850		
820					30×45	2480	35×35	2480	390					30×45	2100	35×35	2100		
1000					30×50	2780	35×40	2780	470					30×50	2350	35×40	2350		
1200							35×45	3150	560							35×45	2500		
1500							35×50	3980	680							35×50	2860		

ALUMINUM ELECTROLYTIC CAPACITORS



GM Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	735							56	22×25	450						
82	22×25	755	25×25	755					68	22×25	580						
100	22×30	860	25×25	860					82	22×30	760	25×25	760				
120	22×35	1030	25×25	1030	30×25				100	22×35	810	25×25	810				
150	22×40	1165	25×30	1165	30×25	1165	35×25	1165	120	22×40	890	25×30	890	30×25	890		
180	22×45	1370	25×35	1370	30×30	1370	35×25	1370	150	22×45	1210	25×35	1210	30×30	1210	35×25	1210
220	22×50	1500	25×40	1500	30×35	1500	35×25	1500	180	22×50	1360	25×40	1360	30×35	1360	35×25	1360
270			25×45	1615	30×40	1615	35×30	1615	220			25×50	1580	30×40	1580	35×30	1580
330			25×50	1805	30×45	1805	35×35	1805	270					30×45	1760	35×35	1760
390					30×50	1950	35×40	1950	330					30×50	1930	35×40	1930
470							35×45	2400	390							35×45	2060
560							35×50	2550	470							35×50	2410

Vdc uF ΦD	500							
	Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
56	22×25	465						
68	22×30	600	25×25	600				
82	22×35	785	25×25	785				
100	22×40	840	25×30	840	30×25	840		
120	22×45	920	25×35	920	30×25	920	35×25	920
150	22×50	1245	25×40	1245	30×30	1245	35×25	1245
180			25×45	1380	30×35	1380	35×25	1380
220			25×50	1610	30×40	1610	35×30	1610
270					30×45	1810	35×35	1810
330					30×50	1985	35×40	1985
390							35×45	2120
470							35×50	2480

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	≥50K
16 ~ 100	0.80	1.00	1.15	1.15	1.15
160 ~ 250	0.81	1.00	1.32	1.45	1.50
350 ~ 500	0.77	1.00	1.30	1.41	1.43

ALUMINUM ELECTROLYTIC CAPACITORS



GM Series

Downsize

High current

Rated Voltage Range: 200~450V

◆ Case size & Permissible rated ripple current (mA rms) at 85°C/ 120Hz

Vdc ΦD μF	200										Vdc ΦD μF	250									
	Φ20		Φ22		Φ 25		Φ30		Φ35			Φ20		Φ22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
220	20×25	930									220	20×25	1000								
330	20×25	1235									330	20×30	1325	22×30	1325						
390	20×30	1510	22×25	1510							390	20×40	1715	22×30	1715	25×25	1715				
470	20×35	1725	22×30	1725	25×25	1725					470			22×35	1980	25×30	1980	30×25	1980		
560	20×40	1895	22×30	1895	25×25	1895					560			22×40	2090	25×35	2090	30×25	2090		
680			22×35	2000	25×30	2000	30×25	2000			680			22×45	2260	25×40	2260	30×30	2260	35×25	2260
820			22×40	2360	25×35	2360	30×25	2360			820			22×50	2485	25×45	2485	30×35	2485	35×30	2485
1000					25×40	3000	30×30	3000	35×25	3000	1000					25×50	2845	30×40	2845	35×30	2845

Vdc ΦD μF	400										Vdc ΦD μF	450									
	Φ20		Φ22		Φ 25		Φ30		Φ35			Φ20		Φ22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
100	20×25	845									82	20×25	680								
120	20×30	970	22×25	970							100	20×30	700	22×25	700						
150	20×35	1000	22×30	1000	25×25	1000					120	20×35	850	22×30	850	25×25	850				
180	20×40	1260	22×35	1260	25×30	1260					150	20×40	1015	22×35	1015	25×30	1015				
220	20×50	1355	22×40	1355	25×35	1355	30×25	1355			180			22×40	1250	25×30	1250	30×25	1250		
270			22×45	1560	25×35	1560	30×30	1560			220			22×45	1450	25×35	1450	30×30	1450		
330			22×50	1690	25×40	1690	30×35	1690	35×25	1690	270			22×50	1600	25×40	1600	30×35	1600	35×25	1600
390					25×50	1870	30×35	1870	35×30	1870	330					25×50	1785	30×40	1785	35×30	1785
470							30×40	2185	35×35	2185	390							30×45	2000	35×35	2000



- **2,000 hours assured at 85°C**



Item	Performance Characteristics										
Category Temperature Range	-25 ~ +85℃										
Working Voltage Range	350 ~ 450Vdc										
Capacitance Range	82 ~ 680 μF										
Capacitance Tolerance	±20% (at 25℃ and 120Hz)										
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table border="1"> <tr> <td>Rated Voltage (V)</td><td>350</td><td>400</td><td>420</td><td>450</td></tr> <tr> <td>tanδ(Max)</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.15</td></tr> </table>	Rated Voltage (V)	350	400	420	450	tanδ(Max)	0.15	0.15	0.15	0.15
Rated Voltage (V)	350	400	420	450							
tanδ(Max)	0.15	0.15	0.15	0.15							
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes										
Low Temperature Characteristics Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated voltage (V)</td><td>350</td><td>400</td><td>420 ~ 450</td></tr> <tr> <td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>4</td><td>8</td></tr> </table> (at 120Hz)	Rated voltage (V)	350	400	420 ~ 450	Z(-25℃)/Z(+20℃)	4	4	8		
Rated voltage (V)	350	400	420 ~ 450								
Z(-25℃)/Z(+20℃)	4	4	8								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85℃. <table border="1"> <tr> <td>Capacitance change</td><td>≧ ±15% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≧ 175% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≧ specified value</td></tr> </table>	Capacitance change	≧ ±15% of the initial value	Dissipation factor(tanδ)	≧ 175% of the specified value	Leakage current	≧ specified value				
Capacitance change	≧ ±15% of the initial value										
Dissipation factor(tanδ)	≧ 175% of the specified value										
Leakage current	≧ specified value										
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 85℃ without voltage applied. <table border="1"> <tr> <td>Capacitance change</td><td>≧ ±15% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≧ 175% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≧ 200% of the specified value</td></tr> </table>	Capacitance change	≧ ±15% of the initial value	Dissipation factor(tanδ)	≧ 175% of the specified value	Leakage current	≧ 200% of the specified value				
Capacitance change	≧ ±15% of the initial value										
Dissipation factor(tanδ)	≧ 175% of the specified value										
Leakage current	≧ 200% of the specified value										
Others	Conforms to JIS-C-5101-4 (1998), characteristic W										

Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

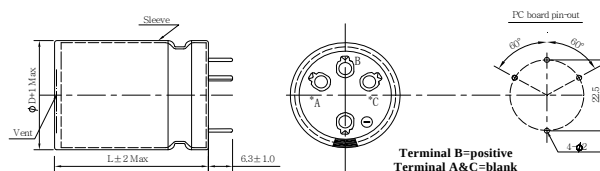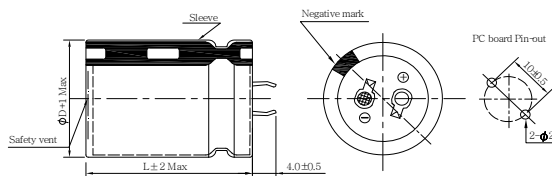

G	R	2	V	3	9	1	M	N	D	2	5	5	1						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Size code(2551 : 25×51)

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (390μF)

Voltage code (350V)

Series code (GR)

GR Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

Vdc ΦD uF	350								Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
100	22×25	760							100	22×25	920						
120	22×30	890	25×25	880					120	22×30	1070	25×25	1060				
150	22×30	990	25×25	980					150	22×30	1200	25×30	1260				
180	22×35	1150	25×30	1150	30×25	1150			180	22×35	1380	25×30	1380	30×25	1380		
220	22×40	1340	25×35	1340	30×25	1280			220	22×40	1620	25×35	1620	30×30	1620		
270	22×45	1630	25×40	1560	30×30	1500	35×25	1500	270	22×50	1880	25×40	1880	30×30	1790	35×25	1790
330			25×45	1800	30×35	1750	35×30	1750	330			25×50	2260	30×35	2080	35×30	2100
390			25×50	2040	30×40	1990	35×30	1900	390					30×40	2380	35×35	2420
470					30×45	2190	35×35	2220	470					30×45	2730	35×35	2630
560					30×50	2590	35×40	2540	560					30×50	3100	35×40	3010
680							35×45	2880	680							35×50	3590

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82									82	22×25	830						
100	22×25	920							100	22×30	980	25×25	960				
120	22×30	1070	25×25	1060					120	22×30	1070	25×30	1130				
150	22×35	1260	25×30	1260					150	22×35	1260	25×30	1260	30×25	1260		
180	22×40	1460	25×35	1460	30×25	1380			180	22×40	1460	25×35	1460	30×30	1460		
220	22×45	1700	25×40	1700	30×30	1620	35×25	1620	220	22×50	1770	25×40	1700	30×30	1620	35×25	1620
270	22×50	1960	25×45	1960	30×35	1900	35×30	1900	270			25×45	1960	30×35	1900	35×30	1900
330			25×50	2260	30×40	2190	35×30	2100	330					30×40	2190	35×35	2230
390					30×45	2380	35×35	2400	390					30×45	2480	35×40	2510
470					30×50	2840	35×40	2750	470					30×50	2840	35×45	2880
560							35×45	3130	560							35×50	3260
680							35×50	3590	680								

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	300	1K	≥10K
350 ~ 450	0.80	1.00	1.10	1.30	1.40

GSF Series

- Standard, Long life down size and high ripple current





SPECIFICATIONS

Item	Performance Characteristics																											
Category Temperature Range	-25 ~ +85℃																											
Working Voltage Range	200 ~ 450Vdc																											
Capacitance Range	68 ~ 2,200 μF																											
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																											
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>220</td><td>250</td><td>400</td><td>420</td><td>450</td></tr><tr><td>tanδ(Max)</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td></tr></table>							Rated Voltage (V)	200	220	250	400	420	450	tanδ(Max)	0.20	0.20	0.20	0.20	0.20	0.20							
	Rated Voltage (V)	200	220	250	400	420	450																					
	tanδ(Max)	0.20	0.20	0.20	0.20	0.20	0.20																					
The above value should be increased by 0.02 for every additional 1000μF																												
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes																											
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>200 ~ 250</td><td>400</td><td>420 ~ 450</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>4</td><td>8</td></tr></table>							Rated voltage (V)	200 ~ 250	400	420 ~ 450	Z(-25℃)/Z(+20℃)	4	4	8													
	Rated voltage (V)	200 ~ 250	400	420 ~ 450																								
Z(-25℃)/Z(+20℃)	4	4	8																									
(at 120Hz)																												
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 85℃.																											
	<table><tr><td>Capacitance change</td><td colspan="6">≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td colspan="6">≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td colspan="6">≒ specified value</td></tr></table>							Capacitance change	≒ ±20% of the initial value						Dissipation factor(tanδ)	≒ 200% of the specified value						Leakage current	≒ specified value					
	Capacitance change	≒ ±20% of the initial value																										
	Dissipation factor(tanδ)	≒ 200% of the specified value																										
Leakage current	≒ specified value																											
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 85℃ without voltage applied.																											
	<table><tr><td>Capacitance change</td><td colspan="6">≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td colspan="6">≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td colspan="6">≒ 200% of the specified value</td></tr></table>							Capacitance change	≒ ±20% of the initial value						Dissipation factor(tanδ)	≒ 200% of the specified value						Leakage current	≒ 200% of the specified value					
	Capacitance change	≒ ±20% of the initial value																										
	Dissipation factor(tanδ)	≒ 200% of the specified value																										
Leakage current	≒ 200% of the specified value																											
Others																												
Conforms to JIS-C-5101-4 (1998), characteristic W																												

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code :K6 ($\phi 35$)

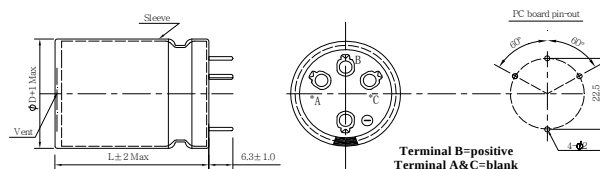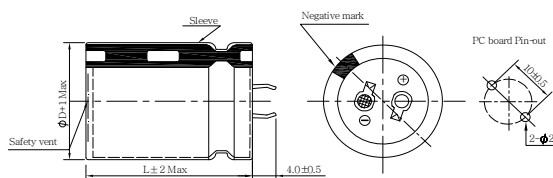

PART NUMBER SYSTEM(Example : 250V 560 μ F)

G S F 2 E 5 6 1 M N D 2 2 5 0

Special Request	
Size code(2250 : 22 $\times$ 50)	
Terminal length code	
Lead forming Type code	
Capacitance tolerance code(M: $\pm 20\%$)	
Capacitance code(560 μ F)	
Voltage code(250V)	
Series code (GSF)	

ALUMINUM ELECTROLYTIC CAPACITORS



GSF Series

◆ Case size & Permissible rated ripple current (mA rms) at 85 °C / 120Hz

Vdc ΦD uF	200								Vdc ΦD uF	220							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×25	1250							270								
330	22×25	1320							330	22×30	1450						
390	22×30	1510	25×25	1560					390	22×35	1640	25×30	1590				
470	22×30	1730	25×30	1780					470	22×35	1870	25×35	1900				
560	22×35	1910	25×30	1960	30×25	1960			560	22×40	2030	25×35	2170	30×30	1990		
680	22×40	2170	25×35	2260	30×30	2270			680	22×45	2390	25×40	2330	30×35	2290		
820	22×45	2450	25×40	2540	30×30	2530			820			25×48	2650	30×40	2590	35×30	2540
1000	22×55	2880	25×45	2990	30×35	2870			1000					30×45	3060	35×35	3000
1200			25×50	3290	30×40	3280	35×35	3250	1200					30×50	3390	35×40	3360
1500					30×50	3760	35×40	3710	1500							35×45	3730
1800					30×55	4200	35×45	4190	1800							35×50	4120
2200							35×50	4780	2200								

Vdc ΦD uF	250								Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
120									82	22×25	760						
150									100	22×30	900						
180									120	22×30	1000	25×25	1030				
220	22×30	1130							150	22×35	1130	25×30	1160				
270	22×30	1370							180	22×40	1290	25×35	1320	30×25	1380		
330	22×35	1520	25×30	1470					220	22×45	1440	25×40	1500	30×30	1520		
390	22×40	1720	25×35	1720					270			25×45	1630	30×35	1660		
470	22×45	1960	25×40	1960	30×30	1860			330			25×50	1820	30×40	1870	35×30	1870
560	22×50	2270	25×45	2140	30×35	2140			390					30×45	2060	35×35	2080
680			25×50	2440	30×40	2470			470					30×50	2280	35×40	2310
820					30×45	2720	35×35	2700	560							35×45	2600
1000					30×50	3240	35×40	3180	680							35×50	2830
1200							35×50	3500	820								

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82	22×25	780							68	22×25	640						
100	22×30	880	25×25	890					82	22×25	790						
120	22×30	980	25×30	990					100	22×30	860	25×25	880				
150	22×35	1100	25×30	1150	30×25	1190			120	22×35	980	25×30	1000	30×25	1020		
180	22×40	1210	25×35	1300	30×30	1350			150	22×40	1080	25×35	1130	30×25	1180		
220	22×48	1410	25×40	1440	30×35	1510			180	22×45	1200	25×40	1280	30×30	1320		
270			25×48	1580	30×40	1740	35×30	1770	220			25×45	1450	30×35	1500	35×30	1460
330			25×55	2010	30×45	1800	35×35	1980	270			25×50	1570	30×40	1730	35×30	1730
390					30×50	2030	35×40	2070	330					30×45	1930	35×35	1960
470					30×55	2280	35×45	2380	390					30×50	2170	35×40	2170
560							35×50	2690	470							35×45	2450
680									560							35×50	2630

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	300	1K	≥10K
200 ~ 250	0.80	1.00	1.15	1.17	1.20
400 ~ 450	0.77	1.00	1.10	1.12	1.15

ALUMINUM ELECTROLYTIC CAPACITORS



GVF Series

- High ripple current
- Load life 5,000 hours at 85°C





SPECIFICATIONS

Item	Performance Characteristics														
Category Temperature Range	-25 ~ +85℃														
Working Voltage Range	200 ~ 500Vdc														
Capacitance Range	56 ~ 2200 μF														
Capacitance Tolerance	±20% (at 25℃ and 120Hz)														
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200 ~ 450</td><td>500</td></tr><tr><td>tanδ(Max)</td><td>0.15</td><td>0.20</td></tr></table>					Rated Voltage (V)	200 ~ 450	500	tanδ(Max)	0.15	0.20				
	Rated Voltage (V)	200 ~ 450	500												
	tanδ(Max)	0.15	0.20												
The above values should be increased by 0.02 for every additional 1000μF															
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes														
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>200 ~250</td><td>400</td><td>420 ~ 450</td><td>500</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>4</td><td>8</td><td>8</td></tr></table>					Rated voltage (V)	200 ~250	400	420 ~ 450	500	Z(-25℃)/Z(+20℃)	4	4	8	8
	Rated voltage (V)	200 ~250	400	420 ~ 450	500										
Z(-25℃)/Z(+20℃)	4	4	8	8											
(at 120Hz)															
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 85℃														
	Capacitance change		≒ ±20% of the initial value												
	Dissipation factor(tanδ)		≒ 200% of the specified value												
	Leakage current		≒ specified value												
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 85℃ without voltage applied.														
	Capacitance change		≒ ±20% of the initial value												
	Dissipation factor(tanδ)		≒ 200% of the specified value												
	Leakage current		≒ 200% of the specified value												
Others	Conforms to JIS-C-5101-4 (1998), characteristic W														

DIMENSIONS (mm)


Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

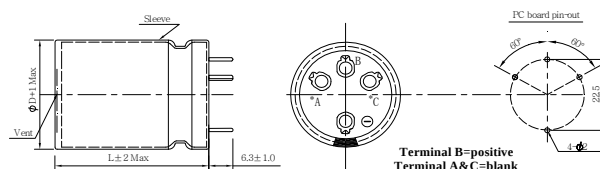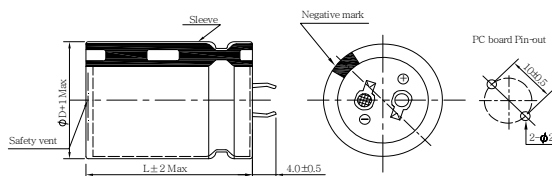

PART NUMBER SYSTEM(Example : 420V 560 μ F)

G V F 2 S 5 6 1 M N D 3 5 5 0

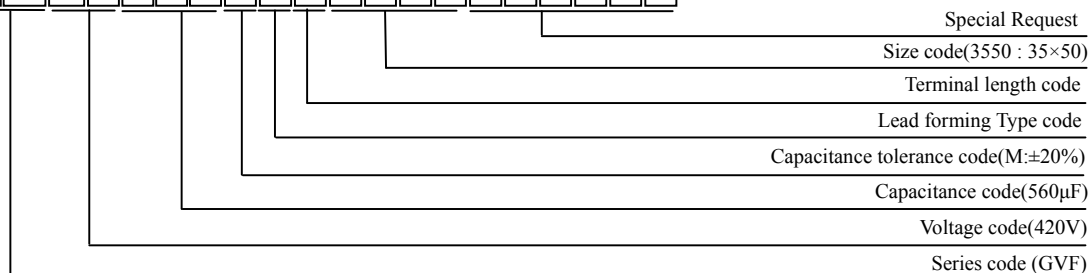

GVF Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

Vdc ΦD uF	200								Vdc ΦD uF	220							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×25	1240							220	22×25	1265						
330	22×30	1450	25×25	1450					270	22×25	1390	25×25	1390				
390	22×30	1500	25×30	1500					330	22×30	1530	25×25	1530				
470	22×35	1760	25×30	1760	30×25	1760			390	22×35	1800	25×30	1800	30×25	1800		
560	22×40	2050	25×35	2050	30×25	2050			470	22×40	1910	25×35	1910	30×25	1910		
680	22×45	2500	25×40	2500	30×30	2500	35×25	2500	560	22×45	2200	25×40	2200	30×30	2200	35×25	2200
820			25×45	2740	30×35	2740	35×25	2740	680	22×50	2530	25×45	2530	30×35	2530	35×25	2530
1000			25×50	2985	30×40	2985	35×30	2985	820			25×50	2810	30×40	2810	35×30	2810
1200					30×45	3300	35×35	3300	1000					30×45	3050	35×35	3050
1500					30×50	3770	35×40	3770	1200					30×50	3375	35×40	3375
1800							35×45	3870	1500							35×45	3830
2200							35×50	4150	1800							35×50	3920

Vdc ΦD uF	250								Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
180	22×25	1100							82	22×25	770						
220	22×25	1300							100	22×30	920	25×25	920				
270	22×30	1450	25×25	1450					120	22×35	1090	25×25	1090				
330	22×35	1610	25×30	1610	30×25	1610			150	22×40	1210	25×30	1210	30×25	1210		
390	22×40	1890	25×35	1890	30×25	1890			180	22×45	1430	25×35	1430	30×30	1430	35×25	1430
470	22×45	2050	25×35	2050	30×30	2050	35×25	2050	220	22×45	1650	25×40	1650	30×30	1650	35×25	1650
560	22×50	2270	25×40	2270	30×35	2270	35×25	2270	270	22×50	1745	25×45	1745	30×35	1745	35×30	1745
680			25×50	2545	30×40	2545	35×30	2545	330			25×50	1940	30×40	1940	35×30	1940
820					30×45	2950	35×35	2950	390					30×45	2180	35×35	2180
1000					30×50	3200	35×40	3200	470					30×50	2460	35×40	2460
1200							35×45	3450	560							35×45	2630
1500							35×50	4000	680							35×50	3060

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	750							56	22×25	495						
82	22×25	775	25×25	775					68	22×25	770						
100	22×30	965	25×25	965					82	22×30	810	25×25	810				
120	22×35	1095	25×25	1095	30×25	1095			100	22×35	980	25×25	980				
150	22×40	1260	25×30	1260	30×25	1260	35×25	1260	120	22×40	1120	25×30	1120	30×25	1120		
180	22×45	1430	25×35	1430	30×30	1430	35×25	1430	150	22×45	1330	25×35	1330	30×30	1330	35×25	1330
220	22×50	1680	25×40	1680	30×35	1680	35×25	1680	180	22×50	1500	25×40	1500	30×35	1500	35×25	1500
270			25×45	1810	30×40	1810	35×30	1810	220			25×50	1740	30×40	1740	35×30	1740
330			25×50	1950	30×45	1950	35×35	1950	270					30×45	1905	35×35	1905
390					30×50	2250	35×40	2250	330					30×50	1995	35×40	1995
470							35×45	2520	390							35×45	2310
560							35×50	2700	470							35×50	2640

ALUMINUM ELECTROLYTIC CAPACITORS



GVE Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

Vdc ΦD uF	500							
	Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
56	22×25	595						
68	22×30	630	25×25	630				
82	22×35	805	25×25	805				
100	22×40	900	25×30	900	30×25	900		
120	22×45	985	25×35	985	30×30	985	35×25	985
150	22×50	1350	25×40	1350	30×30	1350	35×25	1350
180			25×45	1400	30×35	1400	35×30	1400
220			25×50	1720	30×40	1720	35×30	1720
270					30×45	1865	35×35	1865
330					30×50	2030	35×40	2030
390							35×45	2225
470							35×50	2510

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
200 ~ 250	0.80	1.00	1.15	1.17	1.20
400 ~ 500	0.90	1.00	1.10	1.12	1.15

PM Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C / 120Hz

Vdc ΦD uF	16								Vdc ΦD uF	25							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
8200	22×25	2330							4700								
10000	22×25	2570							5600	22×25	2055						
12000	22×30	2660	25×25	2660					6800	22×30	2375	25×25	2375				
15000	22×35	3300	25×30	3300	30×25	3300			8200	22×35	2600	25×25	2600				
18000	22×40	3720	25×35	3720	30×25	3720			10000	22×40	2930	25×30	2930	30×25	2930		
22000	22×50	3960	25×40	3960	30×30	3960	35×25	3960	12000	22×45	3290	25×35	3290	30×30	3290	35×25	3290
27000			25×45	4480	30×35	4480	35×30	4480	15000	22×50	3675	25×40	3675	30×30	3675	35×25	3675
33000			25×50	4955	30×40	4955	35×30	4955	18000			25×45	4140	30×35	4140	35×30	4140
39000					30×45	5535	35×35	5535	22000			25×50	4845	30×45	4845	35×35	4845
47000					30×50	6315	35×40	6315	27000					30×50	5510	35×40	5510
56000							35×45	7090	33000							35×45	6280
68000							35×50	8030	39000							35×50	7030

Vdc ΦD uF	35								Vdc ΦD uF	50							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
3900	22×25	2065							2200	22×25	1775						
4700	22×30	2250	25×25	2250					3300	22×30	2210	25×25	2210				
5600	22×35	2560	25×25	2560					3900	22×35	2465	25×30	2465	30×25	2465		
6800	22×40	2600	25×30	2600	30×25	2600			4700	22×40	2610	25×35	2610	30×25	2610		
8200	22×45	2880	25×35	2880	30×30	2880	35×25	2880	5600	22×45	3135	25×35	3135	30×30	3135	35×25	3135
10000	22×50	3320	25×40	3320	30×30	3320	35×25	3320	6800	22×50	3580	25×40	3580	30×35	3580	35×30	3580
12000			25×45	3700	30×35	3700	35×30	3700	8200			25×50	4100	30×40	4100	35×30	4100
15000			25×50	4200	30×40	4200	35×35	4200	10000					30×45	4625	35×35	4625
18000					30×45	5150	35×40	5150	12000					30×50	5190	35×40	5190
22000					30×50	5615	35×45	5615	15000							35×45	5990
27000							35×50	6410	18000							35×50	6245

Vdc ΦD uF	63								Vdc ΦD uF	80							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1500									1200	22×25	1570						
1800	22×25	1690							1500	22×25	1745						
2200	22×30	2145	25×25	2145					1800	22×30	1990	25×25	1990				
2700	22×35	2230	25×25	2230					2200	22×35	2270	25×30	2270	30×25	2270		
3300	22×35	2455	25×30	2455	30×25	2455			2700	22×40	2580	25×35	2580	30×25	2580		
3900	22×40	2790	25×35	2790	30×30	2790	35×25	2790	3300	22×45	2985	25×40	2985	30×30	2985	35×25	2985
4700	22×50	3125	25×40	3125	30×30	3125	35×25	3125	3900	22×50	3255	25×45	3255	30×35	3255	35×25	3255
5600			25×45	3490	30×35	3490	35×30	3490	4700			25×50	3765	30×40	3765	35×30	3765
6800			25×50	3970	30×40	3970	35×30	3970	5600					30×45	4230	35×35	4230
8200					30×45	4490	35×35	4490	6800					30×50	4780	35×40	4780
10000					30×50	5110	35×40	5110	8200							35×45	5420
12000							35×45	5760	10000							35×50	6170

ALUMINUM ELECTROLYTIC CAPACITORS



PM Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C / 120Hz

Vdc ΦD uF	100								Vdc ΦD uF	160							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
820	22×25	1725							330	22×25	1300						
1200	22×30	1950	25×25	1950					390	22×25	1410						
1500	22×35	2260	25×30	2260	30×25	2260			470	22×30	1610	25×25	1610				
1800	22×40	2560	25×35	2560	30×25	2560			560	22×35	1810	25×25	1810				
2200	22×45	2920	25×40	2920	30×30	2920	35×25	2920	680	22×40	2000	25×30	2000	30×25	2000		
2700	22×50	3300	25×45	3300	30×35	3300	35×30	3300	820	22×45	2325	25×35	2325	30×30	2325	35×25	2325
3300			25×50	3765	30×40	3765	35×30	3765	1000	22×50	2600	25×40	2600	30×30	2600	35×25	2600
3900					30×45	4180	35×35	4180	1200			25×45	2930	30×35	2930	35×30	2930
4700					30×50	4750	35×40	4750	1500			25×50	3430	30×45	3430	35×35	3430
5600							35×45	5350	1800					30×50	3470	35×40	3470
6800							35×50	6050	2200							35×45	4445
8200									2700							35×50	5070

Vdc ΦD uF	200								Vdc ΦD uF	250							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×25	1175							180	22×25	860						
330	22×30	1345	25×25	1345					220	22×25	1065						
390	22×30	1465	25×25	1465					270	22×30	1225	25×25	1225				
470	22×35	1670	25×30	1670	30×25	1670			330	22×35	1400	25×30	1400	30×25	1400		
560	22×40	1860	25×35	1860	30×25	1860			390	22×40	1540	25×30	1540	30×25	1540		
680	22×50	2135	25×40	2135	30×30	2135	35×25	2135	470	22×45	1725	25×35	1725	30×30	1725	35×25	1725
820			25×45	2415	30×35	2415	35×25	2415	560	22×50	1950	25×40	1950	30×35	1950	35×25	1950
1000			25×50	2745	30×40	2745	35×30	2745	680			25×50	2270	30×40	2270	35×30	2270
1200					30×45	3075	35×35	3075	820					30×45	2560	35×35	2560
1500					30×50	3550	35×40	3550	1000					30×50	3085	35×40	3085
1800							35×45	4015	1200							35×45	3280
2200							35×50	4575	1500							35×50	3755

Vdc ΦD uF	400								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82	22×25	720							56	22×25	600						
100	22×30	835	25×25	835					68	22×25	660						
120	22×35	945	25×25	945					82	22×30	760	25×25	760				
150	22×40	1075	25×30	1075	30×25	1075			100	22×35	864	25×25	864				
180	22×45	1225	25×35	1225	30×30	1225	35×25	1225	120	22×40	960	25×30	960	30×25	960		
220	22×45	1365	25×40	1365	30×30	1365	35×25	1365	150	22×45	1100	25×35	1100	30×30	1100	35×25	1100
270	22×50	1520	25×45	1520	30×35	1520	35×30	1520	180	22×50	1235	25×40	1235	30×35	1235	35×25	1235
330			25×50	1765	30×40	1765	35×30	1765	220			25×50	1430	30×40	1430	35×30	1430
390					30×45	1980	35×35	1980	270					30×45	1650	35×35	1650
470					30×50	2230	35×40	2230	330					30×50	1865	35×40	1865
560							35×45	2500	390							35×45	2085
680							35×50	2825	470							35×50	2350

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
16 ~ 100	0.90	1.00	1.15	1.15	1.15
160 ~ 250	0.88	1.00	1.15	1.17	1.20
350 ~ 450	0.90	1.00	1.10	1.12	1.15

ALUMINUM ELECTROLYTIC CAPACITORS



PL Series

- Load life 2,000 hours at 105°C
- Large size for PCB board mounting hole type





SPECIFICATIONS

Item	Performance Characteristics	
Category Temperature Range	-40 ~ +105°C	-25 ~ +105°C
Working Voltage Range	16 ~ 100Vdc	160 ~ 500Vdc
Capacitance Range	560 ~ 47,000µF	39 ~ 2,200µF
Capacitance Tolerance	±20% (at 25°C and 120Hz)	
Dissipation Factor (tanδ) (at 25°C, 120Hz)	Rated Voltage (V)	16 25 35 50 63 80 100 ~ 250 350 ~ 450 475 500
	tanδ(Max)	0.35 0.35 0.25 0.25 0.25 0.20 0.15 0.15 0.20 0.20
The above values should be increased by 0.02 for every additional 1000µF		
Leakage Current	I=0.02CV or 3000µA, whichever is smaller I : Leakage current (µA) C : Rated capacitance (µF) V : Rated voltage (V) Impress the rated voltage for 5 minutes	
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	16 25 35 50 63 80 100 160 ~ 250 400 420 ~ 500
	Z(-40°C)/Z(+20°C)	15 10 8 6 6 5 5 — — —
	Z(-25°C)/Z(+20°C)	— — — — — — — 4 4 8
(at 120Hz)		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105°C.	
Shelf Life	Capacitance change	≡ ±20% of the initial value
	Dissipation factor(tanδ)	≡ 200% of the specified value
	Leakage current	≡ 200% of the specified value
Others	Conforms to JIS-C-5101-4 (1998), characteristic W	

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

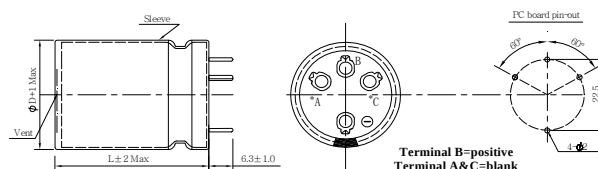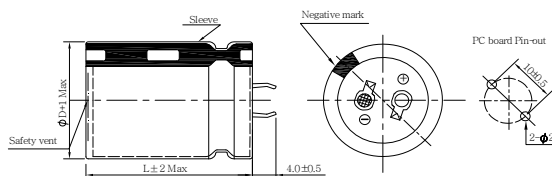

PART NUMBER SYSTEM(Example : 500V 100µF)

P L 2 H 1 0 1 M N D 2 5 4 5

Special Request

Size code(2545 : 25×45)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (100µF)

Voltage code (500V)

Series code (PL)

PL Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C / 120Hz

Vdc ΦD uF	16								Vdc ΦD uF	25							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
6800	22×25	1490							4700	22×25	1425						
10000	22×30	1870	25×25	1870					5600	22×25	1545						
12000	22×35	2100	25×30	2100	30×25	2100			6800	22×30	1765	25×25	1765				
15000	22×40	2450	25×35	2450	30×25	2450			8200	22×35	2000	25×30	2000	30×25	2000		
18000	22×45	2725	25×40	2725	30×30	2725	35×25	2725	10000	22×40	2270	25×35	2270	30×25	2270		
22000			25×45	3150	30×35	3150	35×25	3150	12000	22×45	2600	25×40	2600	30×30	2600	35×25	2600
27000			25×50	3580	30×40	3580	35×30	3580	15000			25×45	3100	30×35	3100	35×30	3100
33000					30×45	4080	35×35	4080	18000			25×50	3360	30×40	3360	35×30	3360
39000					30×50	4565	35×40	4565	22000					30×45	3800	35×35	3800
47000							35×45	5155	27000							35×45	4490

Vdc ΦD uF	35								Vdc ΦD uF	50							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
3300	22×25	1330							1800	22×25	1260						
3900	22×30	1490							2200	22×30	1600	25×25	1600				
4700	22×30	1630	25×25	1630					3300	22×35	1830	25×30	1830				
5600	22×35	1860	25×30	1860	30×25	1860			3900	22×40	2070	25×35	2070	30×25	2070		
6800	22×40	2090	25×35	2090	30×25	2090			4700	22×45	2355	25×35	2355	30×30	2355	35×25	2355
8200	22×45	2610	25×40	2610	30×30	2610	35×25	2610	5600	22×50	2565	25×40	2565	30×35	2565	35×25	2565
10000			25×45	2755	30×35	2755	35×30	2755	6800			25×50	3135	30×40	3135	35×30	3135
12000			25×50	3075	30×40	3075	35×30	3075	8200					30×45	3420	35×35	3420
15000					30×45	3530	35×35	3530	10000					30×50	3825	35×40	3825
18000							35×40	4150	12000							35×45	4320
22000							35×50	4670	15000								

Vdc ΦD uF	63								Vdc ΦD uF	80							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1200	22×25	1130							820	22×25	1050						
1500	22×25	1260							1000	22×25	1155						
1800	22×30	1440	25×25	1440					1200	22×30	1320	25×25	1320				
2200	22×35	1650	25×30	1650					1500	22×35	1525	25×30	1525				
2700	22×40	1890	25×35	1890	30×25	1890			1800	22×40	1710	25×30	1710	30×25	1710		
3300	22×50	2155	25×40	2155	30×30	2155	35×25	2155	2200	22×45	1965	25×35	1965	30×30	1965	35×25	1965
3900			25×45	2420	30×35	2420	35×25	2420	2700			25×45	2240	30×35	2240	35×25	2240
4700			25×50	2715	30×40	2715	35×30	2715	3300			25×50	2545	30×40	2545	35×30	2545
5600					30×45	3055	35×35	3055	3900					30×45	2850	35×35	2850
6800					30×50	3465	35×40	3465	4700					30×50	3220	35×40	3220
8200							35×45	3700	5600							35×45	3610
10000							35×50	4180	6800							35×50	3700

ALUMINUM ELECTROLYTIC CAPACITORS



PL Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C / 120Hz

Vdc ΦD uF	100								Vdc ΦD uF	160							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
560	22×25	995							220	22×25	760						
820	22×30	1260	25×25	1260					330	22×25	1140	25×25	1140				
1000	22×35	1425	25×30	1425					390	22×30	1215	25×25	1215	30×25	1215		
1200	22×40	1620	25×35	1620	30×25	1620			470	22×35	1330	25×25	1330	30×25	1330		
1500	22×45	1880	25×40	1880	30×30	1880	35×25	1880	560	22×40	1460	25×30	1460	30×25	1460	35×25	1460
1800			25×45	2115	30×35	2115	35×25	2115	680	22×45	1615	25×35	1615	30×25	1615	35×25	1615
2200			25×50	2565	30×40	2565	35×30	2565	820	22×50	1900	25×40	1900	30×30	1900	35×25	1900
2700					30×45	2735	35×35	2735	1000			25×45	2110	30×35	2110	35×25	2110
3300					30×50	3115	35×40	3115	1200			25×50	2315	30×40	2315	35×30	2315
3900							35×45	3485	1500					30×45	2675	35×35	2675
4700							35×50	3610	1800					30×50	3140	35×45	3140
5600									2200							35×50	3580

Vdc ΦD uF	200								Vdc ΦD uF	220							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
150	22×25	625							150	22×25	650						
180	22×25	680							180	22×25	695						
220	22×25	750	25×25	750					220	22×25	800	25×25	800				
330	22×30	1140	25×25	1140	30×25	1140			330	22×30	1160	25×25	1160	30×25	1160		
390	22×35	1240	25×25	1240	30×25	1240			390	22×40	1300	25×30	1300	30×25	1300	35×25	1300
470	22×40	1335	25×30	1335	30×25	1335	35×25	1335	470	22×45	1355	25×35	1355	30×30	1355	35×25	1355
560	22×45	1480	25×35	1480	30×25	1480	35×25	1480	560	22×50	1550	25×40	1550	30×35	1550	35×25	1550
680	22×50	1650	25×40	1650	30×30	1650	35×25	1650	680			25×45	1700	30×40	1700	35×30	1700
820			25×50	1935	30×35	1935	35×30	1935	820			25×50	1820	30×45	1820	35×30	1820
1000					30×45	2185	35×35	2185	1000					30×50	2010	35×35	2010
1200					30×50	2515	35×40	2515	1200							35×40	2200
1500							35×45	2925	1500							35×45	2460

Vdc ΦD uF	250								Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
120	22×25	560							47	22×25	350						
150	22×25	675							68	22×25	480	25×25	480				
180	22×25	710	25×25	710					82	22×30	600	25×25	600				
220	22×30	870	25×25	870	30×25	870			100	22×30	635	25×25	635	30×25	635		
330	22×40	1195	25×30	1195	30×25	1195	35×25	1195	120	22×35	680	25×30	680	30×25	680		
390	22×45	1415	25×35	1415	30×25	1415	35×25	1415	150	22×40	795	25×35	795	30×25	795	35×25	795
470	22×50	1490	25×40	1490	30×30	1490	35×25	1490	180	22×50	890	25×40	890	30×30	890	35×25	890
560			25×45	1700	30×35	1700	35×30	1700	220			25×45	1015	30×35	1015	35×30	1015
680			25×50	1870	30×40	1870	35×30	1870	330					30×45	1280	35×35	1280
820					30×45	1880	35×35	1880	390					30×50	1460	35×40	1460
1000							35×40	2185	470							35×45	1650
1200							35×45	2300									

ALUMINUM ELECTROLYTIC CAPACITORS



PL Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C / 120Hz

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
47	22×25	370							47								
68	22×25	505	25×25	505					68	22×30	475	25×25	475				
82	22×30	550	25×25	550					82	22×35	520	25×25	520				
100	22×30	605	25×25	605	30×25	605			100	22×40	600	25×30	600	30×25	600		
120	22×35	665	25×30	665	30×25	665			120	22×45	680	25×35	680	30×25	680		
150	22×40	740	25×35	740	30×25	740	35×25	740	150	22×50	710	25×40	710	30×30	710	35×25	710
180	22×50	810	25×40	810	30×30	810	35×25	810	180			25×45	825	30×35	825	35×30	825
220			25×45	900	30×35	900	35×30	900	220			25×50	930	30×40	930	35×30	930
330					30×45	1295	35×35	1295	330					30×50	1310	35×40	1310
390					30×50	1465	35×40	1465	390							35×45	1470
470							35×45	1600	470							35×50	1630

Vdc ΦD uF	475								Vdc ΦD uF	500							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
39	22×25	370							39	22×30	350						
47	22×25	420							47	22×35	410						
56	22×30	475	25×25	475					56	22×40	470						
68	22×30	555	25×25	555					68	22×45	540						
82	22×35	590	25×30	590	30×25	590			82	22×50	620						
100	22×40	665	25×35	665	30×25	665	35×25	665	100			25×45	670				
120	22×50	760	25×40	760	30×30	760	35×25	760	120			25×50	770			35×30	720
150			25×45	825	30×35	825	35×30	825	150					30×40	850		
180					30×45	930	35×35	930	180					30×50	1010		
220					30×50	1090	35×40	1090	220							35×45	1120
270							35×45	1200	270							35×50	1290

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	≥50K
16 ~ 100	0.95	1.00	1.05	1.08	1.08
160 ~ 250	0.81	1.00	1.32	1.45	1.50
350 ~ 500	0.77	1.00	1.30	1.41	1.43

ALUMINUM ELECTROLYTIC CAPACITORS



PK Series

- Long life and high temperature, down size and high ripple current
- Load life 3,000 hours at 105°C





SPECIFICATIONS

Item	Performance Characteristics																
Category Temperature Range	-25 ~ +105℃																
Working Voltage Range	200 ~ 450Vdc																
Capacitance Range	56 ~ 1,800μF																
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>220</td><td>250</td><td>350</td><td>400</td><td>420</td><td>450</td></tr><tr><td>tanδ(Max)</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.15</td></tr></table> The above values should be increased by 0.02 for every additional 1000μF	Rated Voltage (V)	200	220	250	350	400	420	450	tanδ(Max)	0.15	0.15	0.15	0.15	0.15	0.15	0.15
Rated Voltage (V)	200	220	250	350	400	420	450										
tanδ(Max)	0.15	0.15	0.15	0.15	0.15	0.15	0.15										
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes																
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>200~250</td><td>350</td><td>400</td><td>420 ~ 450</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>4</td><td>4</td><td>8</td></tr></table> (at 120Hz)	Rated voltage (V)	200~250	350	400	420 ~ 450	Z(-25℃)/Z(+20℃)	4	4	4	8						
Rated voltage (V)	200~250	350	400	420 ~ 450													
Z(-25℃)/Z(+20℃)	4	4	4	8													
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 105℃ <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value										
Capacitance change	≒ ±20% of the initial value																
Dissipation factor(tanδ)	≒ 200% of the specified value																
Leakage current	≒ specified value																
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value										
Capacitance change	≒ ±20% of the initial value																
Dissipation factor(tanδ)	≒ 200% of the specified value																
Leakage current	≒ 200% of the specified value																
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

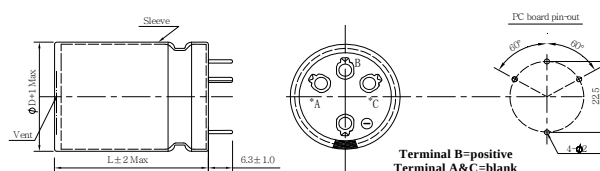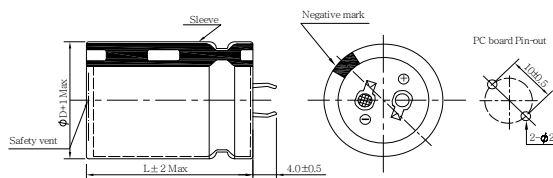

PART NUMBER SYSTEM(Example : 420V 470µF)

P	K	2	S	4	7	1	M	N	D	3	5	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(3545 : 35×45)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (470µF)

Voltage code (420V)

Series code (PK)

ALUMINUM ELECTROLYTIC CAPACITORS



PK Series

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 105°C

Vdc ΦD uF	200								Vdc ΦD uF	220							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×25	1010							220	22×25	900						
330	22×30	1150							270	22×30	950						
390	22×35	1210	25×30	1200					330	22×30	1200	25×30	1150				
470	22×40	1330	25×35	1320					390	22×35	1300	25×30	1320				
560	22×45	1470	25×40	1460	30×30	1460			470	22×40	1520	25×35	1400	30×30	1350		
680	22×50	1610	25×45	1620	30×35	1630			560	22×45	1610	25×40	1510	30×30	1510		
820			25×50	1780	30×40	1830	35×30	1820	680			25×50	1710	30×35	1660	35×30	1620
1000					30×45	2100	35×35	2100	820			25×55	1860	30×40	1820	35×35	1760
1200					30×50	2410	35×40	2420	1000					30×50	2260	35×40	2230
1500							35×45	2810	1200					30×55	2630	35×45	2620
1800							35×50	3050	1500							35×50	2920

Vdc ΦD uF	250								Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
120									68	22×25	470						
150									82	22×25	580						
180									100	22×30	640	25×25	640				
220	22×30	910							120	22×35	690	25×30	680				
270	22×30	1050							150	22×40	810	25×30	810	30×25	750		
330	22×35	1170	25×30	1160					180	22×45	900	25×35	890	30×30	870		
390	22×40	1360	25×35	1330	30×25	1360			220	22×50	1010	25×40	1000	30×30	1000	35×25	1000
470	22×45	1460	25×40	1430	30×30	1510			270			25×50	1100	30×35	1110	35×30	1110
560	22×50	1570	25×45	1640	30×35	1640			330					30×40	1310	35×30	1310
680			25×50	1930	30×40	1820	35×30	1820	390					30×50	1410	35×35	1420
820					30×45	1990	35×35	2030	470							35×40	1730
1000					30×50	2190	35×40	2140	560							35×45	1930
1200							35×50	2760	680							35×55	2120

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	460							56	22×25	410						
82	22×30	590	25×25	600					68	22×30	490						
100	22×30	630	25×25	620					82	22×30	590	25×25	590				
120	22×35	670	25×30	700	30×25	750			100	22×35	640	25×30	640	30×25	580		
150	22×40	790	25×35	800	30×25	770			120	22×40	690	25×30	690	30×25	670		
180	22×45	880	25×40	870	30×30	890	35×25	840	150	22×45	810	25×35	810	30×30	740	35×25	690
220			25×45	990	30×35	1050	35×30	980	180	22×50	870	25×40	870	30×30	840	35×25	790
270			25×50	1270	30×40	1100	35×30	1180	220			25×45	1010	30×35	940	35×30	970
330					30×45	1260	35×35	1330	270					30×40	1070	35×30	1170
390					30×50	1380	35×40	1500	330					30×45	1210	35×35	1330
470							35×45	1730	390							35×40	1520
560							35×50	1900	470							35×45	1700

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers



Vdc	Frequency (Hz)				
	50	120	1K	10K	≥50K
200 ~ 250	0.81	1.00	1.32	1.45	1.50
350 ~ 450	0.77	1.00	1.30	1.41	1.43

- ## ◆ SPECIFICATIONS

SPECIFICATIONS									
Item	Performance Characteristics								
Category Temperature Range	-25 ~ +105℃								
Working Voltage Range	200 ~ 400Vdc								
Capacitance Range	68 ~ 1,000μF								
Capacitance Tolerance	±20% (at 25℃ and 120Hz)								
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>250</td><td>400</td></tr><tr><td>tanδ(Max)</td><td>0.15</td><td>0.15</td><td>0.20</td></tr></table>	Rated Voltage (V)	200	250	400	tanδ(Max)	0.15	0.15	0.20
Rated Voltage (V)	200	250	400						
tanδ(Max)	0.15	0.15	0.20						
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes								
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>200~250</td><td>400</td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>4</td></tr></table> (at 120Hz)	Rated voltage (V)	200~250	400	Z(-25℃)/Z(+20℃)	4	4		
Rated voltage (V)	200~250	400							
Z(-25℃)/Z(+20℃)	4	4							
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 4,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value		
Capacitance change	≒ ±20% of the initial value								
Dissipation factor(tanδ)	≒ 200% of the specified value								
Leakage current	≒ specified value								
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>	Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value		
Capacitance change	≒ ±20% of the initial value								
Dissipation factor(tanδ)	≒ 200% of the specified value								
Leakage current	≒ 200% of the specified value								
Others	Conforms to JIS-C-5101-4 (1998), characteristic W								

Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

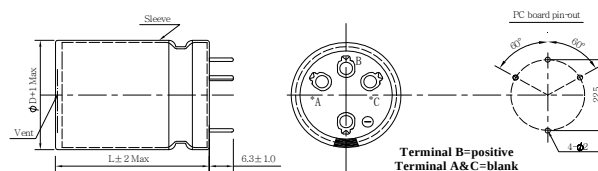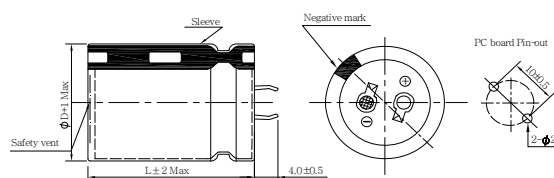

P	T	2	E	3	3	1	M	N	D	2	2	4	5						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(2245 : 22×45)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (330μF)

Voltage code (250V)

Series code (PT)

PT Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C/120Hz

Vdc ΦD uF	200						Vdc ΦD uF	250							
	Φ 22		Φ 25		Φ30			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68							68								
100							100	22×25	400						
120	22×25	430					120	22×30	440						
150	22×25	480					150	22×30	550						
220	22×30	670					220	22×35	750						
330	22×35	960					330	22×45	1020						
470	22×45	1100					470			25×50	1200				
680			25×50	1350			680					30×50	1450		
820					30×45	1600	820							35×45	1700
1000					30×50	1750	1000							35×50	1850

Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	280						
100	22×35	470						
120			25×35	520				
150			25×40	600				
220			25×50	820				
330					30×50	1010		
470							35×50	1300

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
200 ~ 250	0.88	1.00	1.15	1.17	1.20
400	0.90	1.00	1.10	1.13	1.15

PG Series

- Smaller size with higher ripple current
- Load life 5,000 hours at 105°C





SPECIFICATIONS

Item	Performance Characteristics																							
Category Temperature Range	-25 ~ +105℃																							
Working Voltage Range	200 ~ 500Vdc																							
Capacitance Range	47 ~ 1,800μF																							
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																							
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>220</td><td>250</td><td>400</td><td>420</td><td>450</td><td>500</td></tr><tr><td>tanδ(Max)</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.25</td><td>0.25</td><td>0.25</td><td>0.25</td></tr></table>								Rated Voltage (V)	200	220	250	400	420	450	500	tanδ(Max)	0.20	0.20	0.20	0.25	0.25	0.25	0.25
Rated Voltage (V)	200	220	250	400	420	450	500																	
tanδ(Max)	0.20	0.20	0.20	0.25	0.25	0.25	0.25																	
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes																							
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>200 ~250</td><td>400</td><td>420~ 450</td><td>500</td><td colspan="3"></td></tr><tr><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>4</td><td>8</td><td>8</td><td colspan="3">(at 120Hz)</td></tr></table>								Rated voltage (V)	200 ~250	400	420~ 450	500				Z(-25℃)/Z(+20℃)	4	4	8	8	(at 120Hz)		
Rated voltage (V)	200 ~250	400	420~ 450	500																				
Z(-25℃)/Z(+20℃)	4	4	8	8	(at 120Hz)																			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>								Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value										
Capacitance change	≒ ±20% of the initial value																							
Dissipation factor(tanδ)	≒ 200% of the specified value																							
Leakage current	≒ specified value																							
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>								Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value										
Capacitance change	≒ ±20% of the initial value																							
Dissipation factor(tanδ)	≒ 200% of the specified value																							
Leakage current	≒ 200% of the specified value																							
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																							

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code : K6 (ø35)

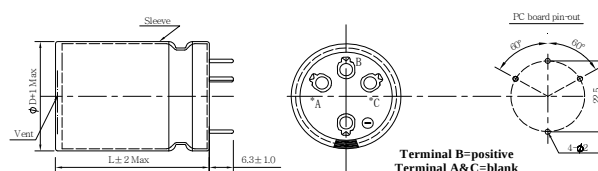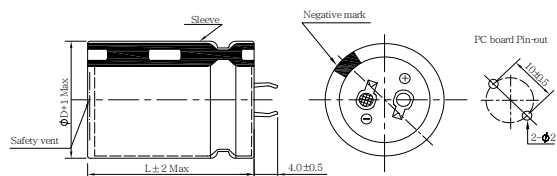

PART NUMBER SYSTEM(Example : 450V 470µF)

P	G	2	W	4	7	1	M	N	D	3	5	5	1						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(3551 : 35×51)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (470µF)

Voltage code (450V)

Series code (PG)

ALUMINUM ELECTROLYTIC CAPACITORS



PG Series

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 105°C

Vdc ΦD uF	200								Vdc ΦD uF	220							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270	22×30	1010							220	22×30	900						
330	22×35	1150							270	22×30	950						
390	22×40	1210	25×30	1200					330	22×35	1200	25×30	1150				
470	22×45	1330	25×35	1320					390	22×40	1300	25×35	1320				
560	22×50	1470	25×40	1460	30×30	1460			470	22×45	1520	25×40	1400	30×30	1350		
680			25×45	1620	30×35	1630			560	22×50	1610	25×45	1510	30×35	1510		
820			25×50	1780	30×40	1830	35×30	1820	680			25×50	1710	30×40	1660	35×30	1620
1000					30×45	2100	35×35	2100	820					30×45	1820	35×35	1760
1200					30×50	2410	35×40	2420	1000					30×50	2160	35×40	2140
1500							35×50	2810	1200							35×45	2520
1800									1500							35×50	2960

Vdc ΦD uF	250								Vdc ΦD uF	400							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
120									68	22×25	470						
150									82	22×25	580						
180									100	22×30	640	25×25	640				
220	22×30	910							120	22×35	690	25×30	680				
270	22×35	1050							150	22×40	810	25×30	810	30×25	750		
330	22×40	1170	25×35	1160					180	22×45	900	25×35	890	30×30	870		
390	22×45	1360	25×40	1330	30×30	1360			220	22×50	1010	25×40	1000	30×35	1000	35×30	1000
470	22×50	1460	25×45	1430	30×35	1510			270			25×50	1100	30×40	1100	35×30	1110
560			25×50	1640	30×40	1640			330					30×45	1310	35×35	1310
680					30×45	1820	35×35	1820	390					30×50	1410	35×40	1420
820					30×50	1990	35×40	2030	470							35×45	1530
1000							35×45	2140	560							35×50	1680
1200							35×50	2760	680							35×55	1880

Vdc ΦD uF	420								Vdc ΦD uF	450							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	460							68	22×25	490						
82	22×30	590	25×25	600					82	22×30	590						
100	22×35	630	25×30	620					100	22×35	640	25×30	640	30×25	580		
120	22×40	670	25×30	700	30×25	750			120	22×40	690	25×35	690	30×25	670		
150	22×45	790	25×35	800	30×30	770			150	22×45	810	25×40	810	30×30	740	35×25	690
180	22×50	880	25×40	870	30×30	890			180	22×50	900	25×45	870	30×35	840	35×30	790
220			25×45	990	30×35	1050	35×30	980	220			25×50	1010	30×40	940	35×30	970
270			25×50	1270	30×40	1100	35×35	1080	270					30×45	1070	35×35	1080
330					30×45	1260	35×40	1230	330					30×50	1210	35×40	1250
390					30×50	1380	35×45	1350	390							35×45	1380
470							35×50	1450	470							35×50	1560
560							35×55	1650	560								

ALUMINUM ELECTROLYTIC CAPACITORS



PG Series

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 105°C

Vdc ΦD uF	500							
	Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
47	22×25	420						
56	22×30	560						
68	22×35	610	25×25	550				
82	22×40	720	25×30	590				
100	22×45	770	25×35	680	30×25	630		
120	22×50	820	25×40	730	30×30	720		
150			25×45	820	30×35	800	35×25	790
180			25×50	940	30×40	910	35×30	900
220					30×45	980	35×35	1010
270					30×50	1170	35×40	1180
330							35×45	1300
390							35×50	1420

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Frequency (Hz)				
	50/60	120	1K	10K	100K
200 ~ 250	0.80	1.00	1.20	1.30	1.40
400 ~ 500	0.80	1.00	1.10	1.12	1.15

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

Terminal Code :K6 (ø35)

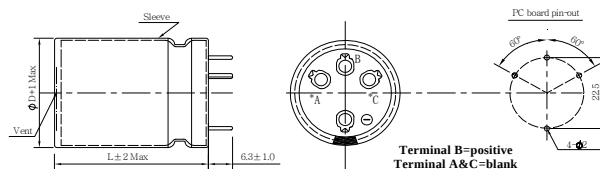

◆ **PART NUMBER SYSTEM(Example : 420V 680μF)**

Special Request

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (680μF)

Voltage code (420V)

Series code (PO)

PO Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz / 105°C

Vdc ΦD uF	400								420							
	Φ 22		Φ 25.4		Φ 30		Φ 35		Φ 22		Φ 25.4		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82									22×25	0.60						
100	22×25	0.66							22×30	0.63	25.4×25	0.63				
120	22×30	0.67							22×35	0.77	25.4×25	0.77				
150	22×35	0.84	25.4×30	0.84					22×40	0.80	25.4×30	0.80	30×25	0.80		
180	22×40	0.90	25.4×30	0.90					22×45	0.86	25.4×35	0.86	30×30	0.86		
220	22×45	1.05	25.4×35	1.05	30×30	1.05			22×50	0.99	25.4×40	0.99	30×30	0.99	35×25	0.99
270	22×50	1.16	25.4×40	1.16	30×30	1.16	35×30	1.16			25.4×45	1.18	30×40	1.18	35×30	1.18
330			25.4×50	1.36	30×35	1.36	35×30	1.36			25.4×55	1.35	30×40	1.35	35×35	1.35
390			25.4×55	1.47	30×40	1.47	35×35	1.47					30×45	1.53	35×40	1.53
470					30×45	1.50	35×40	1.50					30×50	1.76	35×40	1.76
560					30×55	1.80	35×40	1.80							35×50	1.99
680							35×50	2.01							35×55	2.09

Vdc ΦD uF	450							
	Φ 22		Φ 25.4		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	22×25	0.48						
82	22×30	0.53						
100	22×30	0.60	25.4×25	0.60				
120	22×35	0.68	25.4×30	0.68				
150	22×40	0.75	25.4×35	0.75	30×25	0.75		
180	22×50	0.82	25.4×40	0.82	30×30	0.82		
220			25.4×45	0.95	30×35	0.95	35×30	0.95
270			25.4×50	1.13	30×40	1.13	35×30	1.13
330					30×45	1.38	35×35	1.38
390					30×50	1.47	35×40	1.47
470							35×45	1.65
560							35×50	1.80

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)					
	50	120	300	1K	10K	50K
400 ~ 450	0.77	1.00	1.16	1.30	1.41	1.43

PI Series

- Endurance with ripple current: 3,000 hours at 105°C





SPECIFICATIONS

Item	Performance Characteristics			
Category Temperature Range	-25 ~ +105℃			
Working Voltage Range	400 ~ 450Vdc			
Capacitance Range	56 ~ 680μF			
Capacitance Tolerance	±20% (at 25℃ and 120Hz)			
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	400	420	450
	tanδ(Max)	0.15	0.20	0.20
Leakage Current	$I \leq 3 \sqrt{CV}$ I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes			
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	400	420~ 450	
	Z(-25℃)/Z(+20℃)	4	8	
	(at 120Hz)			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 105℃.			
	Capacitance change	≦ ±20% of the initial value		
	Dissipation factor(tanδ)	≦ 200% of the specified value		
	Leakage current	≦ The initial specified value		
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 105℃ without voltage applied.			
	Capacitance change	≦ ±15% of the initial value		
	Dissipation factor(tanδ)	≦ 150% of the specified value		
	Leakage current	≦ The initial specified value		
Others	Conforms to JIS-C-5101-4 (1998), characteristic W			

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code :K6 (ø35)

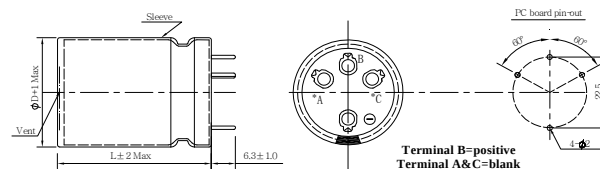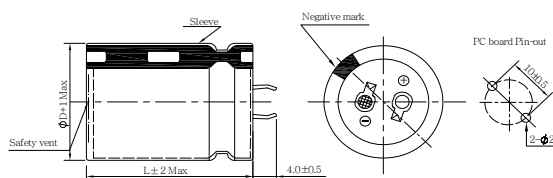

PART NUMBER SYSTEM(Example : 450V 270µF)

P I 2 W 2 7 1 M N D 3 0 4 1

Special Request

Size code(3041 : 30×41)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (270µF)

Voltage code (450V)

Series code (PI)

PI Series

◆ Case size & Permissible rated ripple current (A rms) at 105°C / 120Hz

Vdc ΦD uF	400								420							
	Φ 22		Φ 25.4		Φ30		Φ35		Φ 22		Φ 25.4		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82	22×25	0.61							22×25	0.61	25.4×25	0.62				
100	22×30	0.66	25.4×25	0.67					22×30	0.66	25.4×25	0.66				
120	22×35	0.71	25.4×25	0.71	30×25	0.73			22×35	0.71	25.4×30	0.71	30×25	0.71		
150	22×40	0.83	25.4×30	0.84	30×25	0.84	35×25	0.84	22×40	0.84	25.4×35	0.84	30×25	0.84		
180	22×45	0.93	25.4×35	0.93	30×30	0.93	35×25	0.93	22×45	0.91	25.4×35	0.91	30×30	0.91	35×25	0.91
220	22×50	1.05	25.4×40	1.05	30×30	1.05	35×25	1.05	22×50	1.05	25.4×45	1.05	30×35	1.05	35×25	1.05
270			25.4×45	1.16	30×35	1.16	35×30	1.16			25.4×50	1.16	30×40	1.16	35×30	1.16
330			25.4×50	1.37	30×40	1.37	35×30	1.37					30×45	1.40	35×35	1.40
390			25.4×60	1.44	30×45	1.44	35×35	1.44					30×50	1.50	35×40	1.50
470					30×50	1.81	35×40	1.81							35×45	1.81
560					30×60	2.00	35×45	2.00							35×50	2.05
680							35×50	2.15							35×60	2.15

Vdc ΦD uF	450							
	Φ 22		Φ 25.4		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
56	22×25	0.40						
68	22×30	0.51	25.4×25	0.51				
82	22×30	0.61	25.4×25	0.61				
100	22×35	0.66	25.4×30	0.66	30×25	0.66		
120	22×40	0.76	25.4×35	0.76	30×25	0.76	35×25	0.76
150	22×45	0.84	25.4×35	0.84	30×30	0.84	35×25	0.84
180	22×50	0.96	25.4×40	0.96	30×30	0.96	35×30	0.96
220			25.4×45	1.07	30×35	1.07	35×30	1.07
270			25.4×60	1.12	30×40	1.12	35×35	1.12
330					30×50	1.38	35×40	1.38
390					30×60	1.44	35×40	1.44
470							35×50	1.76
560							35×60	1.82

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)					
	50	120	300	1K	10K	50K
400 ~ 450	0.77	1.00	1.16	1.30	1.41	1.43

ALUMINUM ELECTROLYTIC CAPACITORS



TG Series

- Load life 5,000 hours at 125°C
- High ripple current, High reliability





SPECIFICATIONS

Item	Performance Characteristics																										
Category Temperature Range	-40 ~ +125℃																										
Working Voltage Range	10 ~ 100Vdc																										
Capacitance Range	680 ~ 47,000μF																										
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																										
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td></tr><tr><td>tanδ(Max)</td><td>0.35</td><td>0.35</td><td>0.35</td><td>0.25</td><td>0.25</td><td>0.25</td><td>0.20</td><td>0.15</td></tr></table>									Rated Voltage (V)	10	16	25	35	50	63	80	100	tanδ(Max)	0.35	0.35	0.35	0.25	0.25	0.25	0.20	0.15
	Rated Voltage (V)	10	16	25	35	50	63	80	100																		
	tanδ(Max)	0.35	0.35	0.35	0.25	0.25	0.25	0.20	0.15																		
The above values should be increased by 0.02 for every additional 1000μF																											
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes																										
Low Temperature Characteristics Impedance Ratio(MAX)	<table><tr><td>Rated voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>15</td><td>15</td><td>10</td><td>8</td><td>6</td><td>6</td><td>5</td><td>5</td></tr></table> (at 120Hz)									Rated voltage (V)	10	16	25	35	50	63	80	100	Z(-40℃)/Z(+20℃)	15	15	10	8	6	6	5	5
Rated voltage (V)	10	16	25	35	50	63	80	100																			
Z(-40℃)/Z(+20℃)	15	15	10	8	6	6	5	5																			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 125℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>									Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value												
Capacitance change	≒ ±20% of the initial value																										
Dissipation factor(tanδ)	≒ 200% of the specified value																										
Leakage current	≒ specified value																										
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after exposing them for 1,000 hours at 125℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ 200% of the specified value</td></tr></table>									Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ 200% of the specified value												
Capacitance change	≒ ±20% of the initial value																										
Dissipation factor(tanδ)	≒ 200% of the specified value																										
Leakage current	≒ 200% of the specified value																										
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																										

DIMENSIONS (mm)

Terminal Code : ND : Standard

Terminal Code : K6 (ø35)

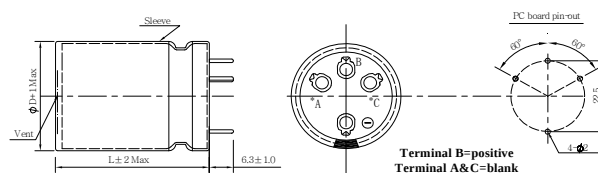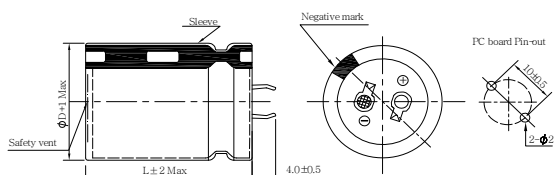

PART NUMBER SYSTEM(Example : 80V 1500µF)

T G 1 K 1 5 2 M N D 2 5 3 5

Special Request

Size code(2535 : 25×35)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M:±20%)

Capacitance code (1500µF)

Voltage code (80V)

Series code (TG)

ALUMINUM ELECTROLYTIC CAPACITORS



TG Series

◆ Case size & Permissible rated ripple current (mA rms) at 125°C / 120Hz

Vdc ΦD uF	10								Vdc ΦD uF	16							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
6800	22×25	1140							5600	22×25	1200						
8200	22×30	1220	25×25	1220					6800	22×30	1340	25×25	1340				
10000	22×35	1445	25×30	1445					8200	22×35	1470	25×30	1470	30×25	1470		
12000	22×40	1660	25×35	1660	30×25	1660			10000	22×40	1700	25×35	1700	30×30	1700		
15000	22×45	1910	25×40	1910	30×30	1910			12000	22×45	1930	25×40	1930	30×35	1930		
18000	22×50	2140	25×45	2140	30×35	2140	35×25	2140	15000	22×50	2250	25×45	2250	30×40	2250	35×25	2250
22000			25×50	2510	30×40	2510	35×30	2510	18000			25×50	2580	30×45	2580	35×30	2580
27000					30×45	2800	35×35	2800	22000					30×50	2990	35×35	2990
33000					30×50	3185	35×40	3185	27000							35×40	3293
39000							35×45	3570	33000							35×45	3750
47000							35×50	3900	39000							35×50	4200

Vdc ΦD uF	25								Vdc ΦD uF	35							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
3900	22×25	1150							2700	22×25	1085						
4700	22×30	1280	25×25	1280					3300	22×30	1200						
5600	22×35	1390	25×30	1390					3900	22×35	1365	25×25	1365				
6800	22×40	1590	25×35	1590					4700	22×40	1470	25×30	1470	30×25	1470		
8200	22×45	1800	25×40	1800	30×25	1800			5600	22×45	1700	25×35	1700	30×30	1700		
10000	22×50	2045	25×45	2045	30×30	2045	35×25	2045	6800	22×50	1880	25×40	1880	30×35	1880	35×25	1880
12000			25×50	2340	30×35	2340	35×30	2340	8200			25×45	2350	30×40	2350	35×30	2350
15000					30×40	2750	35×35	2750	10000			25×50	2510	30×45	2510	35×35	2510
18000					30×45	3025	35×40	3025	12000					30×50	2830	35×40	2830
22000					30×50	3420	35×45	3420	15000							35×45	3250
27000							35×50	4040	18000							35×50	3820

Vdc ΦD uF	50								Vdc ΦD uF	63							
	Φ 22		Φ 25		Φ 30		Φ 35			Φ 22		Φ 25		Φ 30		Φ 35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1500	22×25	1030							1000	22×25	950						
1800	22×30	1170	25×25	1170					1200	22×30	1030						
2200	22×35	1440	25×30	1440					1500	22×35	1050	25×25	1050				
3300	22×40	1665	25×35	1665	30×25	1665			1800	22×40	1320	25×30	1320				
3900	22×45	1860	25×35	1860	30×30	1860			2200	22×45	1515	25×35	1515	30×25	1515		
4700	22×50	2150	25×40	2150	30×35	2150	35×25	2150	2700	22×50	1740	25×40	1740	30×30	1740		
5600			25×50	2330	30×40	2330	35×30	2330	3300			25×45	1980	30×35	1980	35×25	1980
6800					30×45	2820	35×35	2820	3900			25×50	2200	30×40	2200	35×30	2200
8200					30×50	3080	35×40	3080	4700					30×45	1980	35×35	1980
10000							35×45	3450	5600					30×50	2200	35×40	2200
12000							35×50	3930	6800							35×45	3155
									8200							35×50	3400

TG Series

◆ Case size & Permissible rated ripple current (mA rms) at 125°C / 120Hz

Vdc ΦD uF	80								Vdc ΦD uF	100							
	Φ 22		Φ 25		Φ30		Φ35			Φ 22		Φ 25		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
820	22×25	945							680	22×25	1030						
1000	22×30	1050	25×25	1050					820	22×30	1145	25×25	1145				
1200	22×35	1200	25×30	1200					1000	22×35	1280	25×30	1280				
1500	22×40	1380	25×35	1380	30×25	1380			1200	22×40	1460	25×35	1460	30×25	1460		
1800	22×45	1555	25×40	1555	30×30	1555			1500	22×45	1700	25×40	1700	30×30	1700		
2200	22×50	1790	25×45	1790	30×35	1790	35×25	1790	1800	22×50	1900	25×45	1900	30×35	1900	35×25	1900
2700			25×50	2040	30×40	2040	35×30	2040	2200			25×50	2300	30×40	2300	35×30	2300
3300					30×45	2320	35×35	2320	2700					30×45	2460	35×35	2460
3900					30×50	2650	35×40	2650	3300					30×50	2800	35×40	2800
4700							35×45	2930	3900							35×45	3140
5600							35×50	3290	4700							35×50	3250

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	≥50K
10 ~ 100	0.95	1.00	1.05	1.08	1.08

ALUMINUM ELECTROLYTIC CAPACITORS



GD Series


- For $\Phi 22$, $\Phi 25$, suitable for horizontal mounting to assure flat and low-profile design



SPECIFICATIONS

Item	Performance Characteristics			
Category Temperature Range	-25 ~ +85℃			
Working Voltage Range	160 ~ 450Vdc			
Capacitance Range	82 ~ 1,200 μF			
Capacitance Tolerance	±20% (at 25℃ and 120Hz)			
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)		160 ~ 450	
	tanδ(Max)		0.15	
	The above value should be increased by 0.02 for every additional 1000μF			
Leakage Current	I=0.02CV or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes			
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)		160 ~ 250	400 450
	Z(-25℃)/Z(+20℃)		4	4 8
Endurance	(at 120Hz)			
	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85℃.			
	Capacitance change		≒ ±20% of the initial value	
	Dissipation factor(tanδ)		≒ 200% of the specified value	
Shelf Life	Leakage current		≒ specified value	
	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 1,000 hours at 85℃ without voltage applied.			
	Capacitance change		≒ ±15% of the initial value	
Others	Dissipation factor(tanδ)		≒ 150% of the specified value	
	Leakage current		≒ 200% of the specified value	
Others	Conforms to JIS-C-5101-4 (1998), characteristic W			

DIMENSIONS (mm)

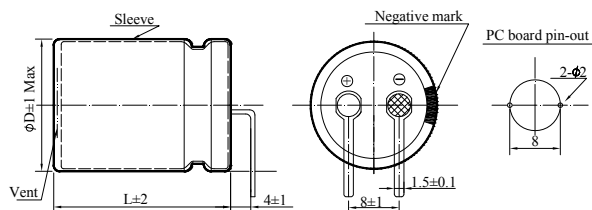

PART NUMBER SYSTEM(Example : 450V 82 μ F)

G	D	2	W	8	2	0	M	R	N	2	0	3	1						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code(2031 : 20 $\times$ 31)

Terminal length code

Lead forming Type code

Capacitance tolerance code(M: $\pm 20\%$)

Capacitance code (82 μ F)

Voltage code (450V)

Series code (GD)

GD Series

◆ Case size & Permissible rated ripple current (mA rms) at 85°C / 120Hz

Vdc ΦD uF	160						Vdc ΦD uF	200					
	Φ 20		Φ22		Φ 25			Φ 20		Φ22		Φ 25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		Φ D×L	RC	ΦD×L	RC	ΦD×L	RC
220	20×25	850	22×25	920			220						
270	20×25	950	22×25	1000			270	20×30	1320				
330	20×25	1150	22×25	1165			330	20×30	1490				
390	20×30	1325	22×30	1340			390	20×35	1660				
470	20×35	1560	22×30	1625			470	20×40	1930	22×35	1800		
560	20×40	1735	22×35	1830	25×30	1955	560	20×45	2000	22×40	1960		
680	20×45	2085	22×40	2100	25×35	2185	680	20×50	2300	22×45	2430	25×35	2680
820	20×50	2300	22×45	2455	25×40	2530	820			22×50	2800	25×40	2800
1000	20×60	2560	22×50	2615	25×45	2900	1000			22×60	3000	25×45	3120
1200			22×55	3100	25×50	3125	1200					25×60	3440

Vdc ΦD uF	250						Vdc ΦD uF	400					
	Φ 20		Φ22		Φ 25			Φ 20		Φ22		Φ 25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82							82	20×30	780				
100							100	20×30	900				
120							120	20×35	1020				
150							150	20×40	1170	22×35	1200		
180							180	20×50	1300	22×40	1380	25×35	1250
220	20×30	1050					220			22×45	1550	25×40	1560
270	20×35	1155	22×30	1170			270			22×60	1700	25×45	1700
330	20×40	1400	22×30	1495			330					25×50	1900
390	20×45	1625	22×35	1700			390					25×60	2150
470	20×50	1800	22×40	1955	25×30	2000	470						
560	20×55	2100	22×45	2150	25×35	2185	560						
680	20×60	2200	22×50	2290	25×40	2310	680						
820			22×60	2655	25×45	2760	820						

Vdc ΦD uF	450					
	Φ 20		Φ22		Φ 25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
82	20×30	800	22×25	815		
100	20×30	950	22×30	1000		
120	20×35	1100	22×30	1125		
150	20×40	1200	22×35	1250	25×30	1280
180	20×45	1325	22×40	1350	25×35	1385
220	20×50	1600	22×50	1625	25×40	1650
270	20×60	1750	22×60	1750	25×50	1750
330					25×55	1950


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)						
	50	60	120	300	1K	10K	50K
160 ~ 250	0.81	0.85	1.00	1.17	1.32	1.45	1.50
400 ~ 450	0.77	0.82	1.00	1.16	1.30	1.41	1.43

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**

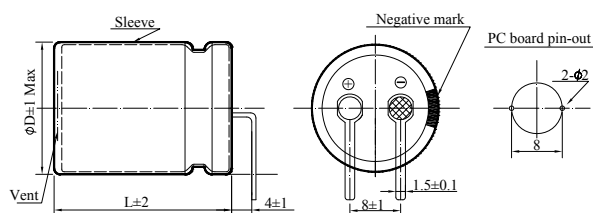

◆ **PART NUMBER SYSTEM(Example : 200V 820μF)**

199

ALUMINUM ELECTROLYTIC CAPACITORS



PX Series

◆ Case size & Permissible rated ripple current (mA rms) at 105°C / 120Hz

Vdc ΦD uF	160						Vdc ΦD uF	200					
	Φ 20		Φ22		Φ 25			Φ 20		Φ22		Φ 25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
270							270	20×30	970				
330	20×30	1020					330	20×35	1170	22×30	1200		
390	20×35	1150	22×30	1170			390	20×40	1270	22×35	1300		
470	20×40	1250	22×30	1280			470	20×45	1410	22×40	1440		
560	20×45	1420	22×35	1450			560	20×55	1560	22×45	1600	25×35	1600
680	20×50	1600	22×40	1640	25×35	1700	680	20×60	1710	22×50	1750	25×40	1760
820	20×55	1810	22×45	1850	25×40	1920	820			22×60	2100	25×45	2100
1000			22×55	2100	25×45	2170	1000					25×50	2360
1200					25×50	2430	1200						
1500					25×60	2620	1500						

Vdc ΦD uF	250						Vdc ΦD uF	400					
	Φ 20		Φ22		Φ 25			Φ 20		Φ22		Φ 25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC		ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68							68	20×30	480				
82							82	20×30	540				
100							100	20×35	600	22×30	620		
120							120	20×40	710	22×35	730		
150							150	20×45	830	22×40	850	25×35	850
180	20×30	820					180	20×55	930	22×45	950	25×35	920
220	20×35	950	22×30	970			220			22×50	1080	25×40	1050
270	20×40	1080	22×35	1110			270			22×60	1200	25×50	1290
330	20×45	1230	22×40	1260			330					25×60	1410
390	20×50	1380	22×45	1410	25×35	1420	390						
470	20×60	1540	22×50	1580	25×40	1610	470						
560			22×55	1800	25×45	1800	560						
680					25×50	2030	680						
820					25×60	2260	820						

Vdc ΦD uF	450					
	Φ 20		Φ22		Φ25	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
68	20×25	500	22×25	520		
82	20×30	630	22×30	660		
100	20×35	650	22×30	685		
120	20×40	750	22×35	790	25×30	800
150	20×45	870	22×40	895	25×35	900
180	20×50	1015	22×50	1030	25×40	1050
220	20×60	1150	22×55	1175	25×45	1190
270					25×55	1300

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	50	120	1K	10K	≥50K
160 ~ 250	0.81	1.00	1.32	1.45	1.50
400 ~ 450	0.77	1.00	1.30	1.41	1.43

ALUMINUM ELECTROLYTIC CAPACITORS



AVAILABLE TERMINALS FOR SNAP-IN TYPE (Unit:mm)

D=Ø30 to Ø35 mm	
D=Ø22 to Ø35 mm	
D=Ø35 to Ø40 mm	
D=Ø40 mm	
D=Ø20X25 to 61 mm D=Ø25X31 to 61 mm	

ALUMINUM ELECTROLYTIC CAPACITORS



PART NUMBER SYSTEM (Ⅲ)

◆ SPECIAL TYPE

Series	Rated Voltage	Capacitance	Tolerance	Terminal Forming Type	Case Dimension	Special Request
(1)	(2)	(3)	(4)	(5)	(6)	(7)
☐ ☐	☐ ☐	☐ ☐ ☐	☐	☐ ☐	☐ ☐ ☐ ☐	☐ ☐ ☐ ☐ ☐ ☐

(1) Series

Series	AQ	AN	SC	SA	SK	SX	SL		
--------	----	----	----	----	----	----	----	--	--

(2) Rated Voltage

Code	1C	1E	1F	1V	1H	1J	1K	2A	2C	2Z	2D	2P	2E	2V	2G	2S	2W	2H	2L	2J
WV	16	25	30	35	50	63	80	100	160	180	200	220	250	350	400	420	450	500	550	600

(3) Capacitance

Code	R10	R47	010	4R7	100	470	101	471	102	472	473
μF	0.1	0.47	1.0	4.7	10	47	100	470	1000	4700	47000

(4) Capacitance Tolerance

Code	J	Q	R	K	V	M	H
%	± 5	+30 / -10	+20 / -0	± 10	+20 / -10	± 20	+20 / -5

(5) Terminal Forming Type

Code	AC	HU	LS (Screw M5×10)	LA (Screw M5×13)	LB (Screw M6×17)	CA	CL
Description	Two Parts of Terminals	Two Vertical Terminals	Two Screw Terminals			Snap-in Terminal	Lug Terminal

(6) Case Dimension

Code	3535	4095	40A5	51A5	51C0	64A0	64B0	76E3	76L5	90F0	90H0	90J0	90K5	90N0
Size	35x35	40x95	40x105	51x105	51x120	64x100	64x110	76x143	76x215	90x150	90x170	90x190	90x205	90x230

(7) Special Request

Code	R	F	L	D
Description	High Rated ripple current	Endurance	Low Leakage Current	Low Dissipation Factor
Code	H	E	P	---
Description	High Temperature	Low Impedance & ESR	PET Sleeve	---

ALUMINUM ELECTROLYTIC CAPACITORS



AQ Series


- High ripple current capability
- High stability.Suitable for LCD and PDP



SPECIFICATIONS

Item	Performance Characteristics					
Category Temperature Range	-25 ~ +85°C					
Working Voltage Range	400 ~ 450Vdc					
Capacitance Range	330 ~ 820µF					
Capacitance Tolerance	±20% (at 25°C and 120Hz)					
Dissipation Factor (tanδ) (at 25°C, 120Hz)	Rated Voltage (V)	400	420	450		
	tanδ(Max)	0.15	0.15	0.15		
Leakage Current	$I = \sqrt{CV}$ or 3000µA, whichever is smaller. I : Leakage current (µA) C : Rated capacitance (µF) V : Rated voltage (V) Impress the rated voltage for 5 minutes					
Low Temperature Characteristics Impedance Ratio(MAX)	Rated voltage (V)	400	420~ 450			
	Z(-25°C)/Z(+20°C)	4	8			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 85°C.					
	Capacitance change	≒ ±20% of the initial value				
	Dissipation factor(tanδ)	≒ 200% of the specified value				
	Leakage current	≒ specified value				
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25°C after the rated voltage applied for 1,000 hours at 85°C without voltage applied.					
	Capacitance change	≒ ±20% of the initial value				
	Dissipation factor(tanδ)	≒ 200% of the specified value				
	Leakage current	≒ 200% of the specified value				
Others	Conforms to JIS-C-5101-4 (1998), characteristic W					

DIMENSIONS (mm)

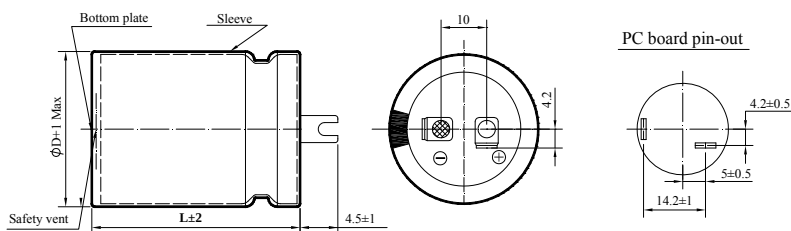

PART NUMBER SYSTEM(Example : 400V 820µF)

A	Q	2	G	8	2	1	M	H	U	3	5	5	8						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code (3558:35×58)

Terminal code

Capacitance tolerance code (M:±20%)

Capacitance code (820µF)

Voltage code (400V)

Series code (AQ)

ALUMINUM ELECTROLYTIC CAPACITORS



AQ Series

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 85°C

Vdc ΦD uF	400				420				450			
	Φ30		Φ35		Φ30		Φ35		Φ30		Φ35	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
330	30×40	1500	35×35	1500	30×40	1350	35×35	1350	30×45	1250	35×40	1250
360	30×40	1600	35×35	1600	30×40	1450	35×35	1450	30×50	1350	35×40	1350
390	30×40	1700	35×35	1700	30×45	1550	35×40	1550			35×45	1450
420	30×45	1800	35×40	1800	30×50	1700	35×40	1700			35×45	1550
440	30×50	1900	35×40	1900	30×50	1900	35×45	1900			35×50	1700
470	30×50	2000	35×40	2000			35×45	2050			35×50	1800
510			35×45	2150			35×50	2150			35×58	2000
560			35×50	2300			35×50	2300				
620			35×50	2450			35×58	2400				
680			35×50	2600								
820			35×58	2850								

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
400 ~ 450	0.80	1.00	1.10	1.20	1.30

ALUMINUM ELECTROLYTIC CAPACITORS



AN Series


- Load life 3,000 hours 85°C



SPECIFICATIONS

Item	Performance Characteristics								
Category Temperature Range	-25 ~ +85°C								
Working Voltage Range	400 ~ 450Vdc								
Capacitance Range	800 ~ 3,300μF								
Capacitance Tolerance	±20% (at 25°C and 120Hz)								
Dissipation Factor (tanδ) (at 25°C, 120Hz)	<table> <tr> <td>Rated Voltage (V)</td><td>400</td><td>420</td><td>450</td></tr> <tr> <td>tanδ(Max)</td><td>0.15</td><td>0.15</td><td>0.15</td></tr> </table>	Rated Voltage (V)	400	420	450	tanδ(Max)	0.15	0.15	0.15
Rated Voltage (V)	400	420	450						
tanδ(Max)	0.15	0.15	0.15						
Leakage Current	$I < \sqrt{CV}$ or 3000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes								
Low Temperature Characteristics Impedance Ratio(MAX)	<table> <tr> <td>Rated voltage (V)</td><td>400 ~ 450</td></tr> <tr> <td>Z(-25°C)/Z(+20°C)</td><td>8</td></tr> </table> (at 120Hz)	Rated voltage (V)	400 ~ 450	Z(-25°C)/Z(+20°C)	8				
Rated voltage (V)	400 ~ 450								
Z(-25°C)/Z(+20°C)	8								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 85°C. <table> <tr> <td>Capacitance change</td><td>≡ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≡ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≡ specified value</td></tr> </table>	Capacitance change	≡ ±20% of the initial value	Dissipation factor(tanδ)	≡ 200% of the specified value	Leakage current	≡ specified value		
Capacitance change	≡ ±20% of the initial value								
Dissipation factor(tanδ)	≡ 200% of the specified value								
Leakage current	≡ specified value								
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25°C after the rated voltage applied for 1,000 hours at 85°C without voltage applied. <table> <tr> <td>Capacitance change</td><td>≡ ±20% of the initial value</td></tr> <tr> <td>Dissipation factor(tanδ)</td><td>≡ 200% of the specified value</td></tr> <tr> <td>Leakage current</td><td>≡ 200% of the specified value</td></tr> </table>	Capacitance change	≡ ±20% of the initial value	Dissipation factor(tanδ)	≡ 200% of the specified value	Leakage current	≡ 200% of the specified value		
Capacitance change	≡ ±20% of the initial value								
Dissipation factor(tanδ)	≡ 200% of the specified value								
Leakage current	≡ 200% of the specified value								
Others	Conforms to JIS-C-5101-4 (1998), characteristic W								

DIMENSIONS (mm)

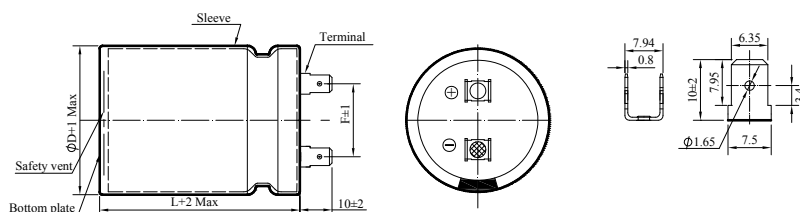

ΦD	35	40	51	64
F±1	14	14	20	25

PART NUMBER SYSTEM(Example : 450V 1800μF)

A N 2 W 1 8 2 M A C 5 1 A 0

Special Request

Size code (51A0:51×100)

Terminal code

Capacitance tolerance code (M:±20%)

Capacitance code (1800μF)

Voltage code (450V)

Series code (AN)

ALUMINUM ELECTROLYTIC CAPACITORS



AN Series

◆ Case size & Permissible rated ripple current (mA rms) 120Hz / 85°C

Vdc uF ΦD	400							
	Φ35		Φ40		Φ51		Φ64	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
800	35×80	3200						
900	35×90	3600						
1000	35×100	4000						
1200			40×100	4200				
1300			40×100	4900				
1500			40×120	5600				
1800					51×90	6050		
2000					51×100	6200		
2200					51×120	6500		
2500					51×120	6800	64×100	6800
2700							64×100	7300
2900							64×100	7850
3300							64×120	8100

Vdc uF ΦD	420							
	Φ35		Φ40		Φ51		Φ64	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
800	35×90	3350						
900	35×100	3750						
1000	35×100	4200						
1200			40×120	4400				
1300			40×120	5100				
1500					51×100	5850		
1800					51×100	6350		
2000					51×120	6500		
2200					51×120	6800	64×100	6800
2500							64×100	7150
2700							64×120	7650
2900							64×120	8200

Vdc uF ΦD	450							
	Φ35		Φ40		Φ51		Φ64	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
800	35×90	3000						
900	35×100	3400						
1000			40×100	3750				
1200			40×120	3950				
1300					51×90	4600		
1500					51×100	5250		
1800					51×100	5700		
2000					51×120	5850	64×100	5850
2200							64×100	6100
2500							64×100	6400
2700							64×120	6850


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
400 ~ 450	0.82	1.00	1.20	1.35	1.40

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**



S	C	2	W	8	2	2	M	L	S	9	0	F	0					
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--

Series code (SC)

ALUMINUM ELECTROLYTIC CAPACITORS



SC Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz / 85℃

Vdc ΦD uF	200								250							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
2200									51×80	3.9						
2700									51×80	4.4						
3300	51×80	4.9							51×100	5.4						
3900	51×80	5.3							51×120	6.2	64×80	6.2				
4700	51×100	6.4	64×80	6.4					51×120	7.1	64×100	7.1				
5600	51×120	7.5	64×80	7.5							64×100	7.7				
6800	51×120	8.7	64×100	8.7							64×120	9.1				
8200			64×100	9.3							64×120	10.0	76×100	10.0		
10000			64×100	10.3									76×100	11.6		
12000			64×120	12.0	76×100	12.0							76×120	12.8		
15000					76×100	14.4							76×120	15.0	90×100	15.0
18000					76×120	16.5	90×100	16.5					76×150	17.6	90×100	14.5
22000					76×150	19.6	90×120	19.6							90×150	20.9
27000					76×150	21.5	90×120	21.5								
33000							90×150	25.5								

Vdc ΦD uF	350								400							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1000									51×80	3.8						
1200	51×80	4.2							51×80	4.5						
1500	51×80	4.9							51×100	5.3						
1800	51×100	5.6							51×100	6.0	64×80	6.3				
2200	51×100	6.7	64×80	7.0					51×120	7.0	64×100	6.8				
2700	51×120	8.0	64×100	8.4							64×100	8.2				
3300			64×100	9.6							64×120	9.6	76×100	9.3		
3900			64×120	10.4									76×120	10.5		
4700					76×100	11.9							76×120	12.3	90×100	13.1
5600					76×120	13.5	90×100	14.4					76×120	14.3	90×100	14.5
6800					76×150	16.0	90×120	16.2					76×150	16.0	90×120	16.3
8200					76×150	18.7	90×120	19.0							90×150	19.0
10000							90×150	20.0							90×180	21.0
12000							90×150	21.3								

Vdc ΦD uF	450								500							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
820	51×80	3.6							51×90	3.7						
1000	51×80	4.0							51×100	4.1						
1200	51×100	4.7							51×110	4.8						
1500	51×120	5.4	64×80	5.6					51×130	5.6	64×100	5.6				
1800	51×120	5.9	64×100	6.1							64×110	6.2				
2200			64×100	7.2							64×120	7.3	76×100	7.2		
2700			64×120	8.6	76×100	8.3					64×140	8.7	76×110	8.5		
3300					76×100	9.7							76×120	9.9		
3900					76×120	11.2	90×100	11.3					76×140	11.4	90×110	11.3
4700					76×150	12.9	90×100	13.1					76×160	13.1	90×130	13.1
5600					76×150	15.3	90×120	15.3					76×190	15.4	90×150	15.3
8200							90×150	17.3							90×190	17.4

ALUMINUM ELECTROLYTIC CAPACITORS



SC Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz / 85°C


Vdc ΦD uF	550								600					
	Φ51		Φ64		Φ76		Φ90		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
820	51×90	3.9												
1000	51×110	4.3												
1200	51×130	5.0	64×90	4.8					64×100	5.4				
1500			64×110	5.9					64×120	6.6				
1800			64×120	6.3					64×135	7.5	76×100	7.2		
2200			64×140	7.5	76×110	7.5			64×155	8.3	76×120	8.0		
2700			64×170	8.9	76×130	8.7			64×185	9.7	76×135	9.4		
3300					76×150	10.1	90×120	10.1	64×220	11.0	76×160	10.8		
3900					76×170	11.6	90×130	11.4			76×185	12.4	90×140	12.2
4700					76×190	13.5	90×150	13.2			76×215	14.3	90×165	14.0
5600							90×170	15.6					90×190	16.5
6800							90×200	16.3					90×220	17.1

◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
200 ~ 450	0.82	1.00	1.20	1.35	1.40
500 ~ 600	0.80	1.00	1.10	1.30	1.35

◆ DIMENSIONS (Screw-Mount) [mm]

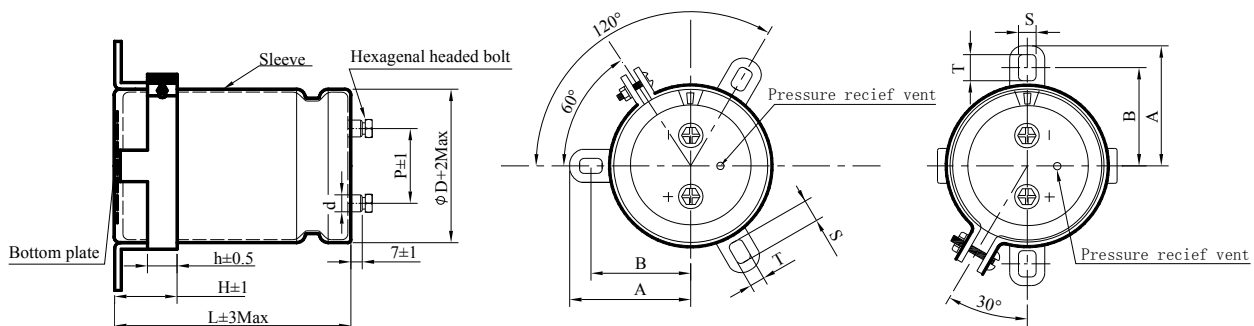

◆ Tterminal pitch and Nominal dia.of bolt

Terminal Code	ΦD	P±1	Nominal dia.of bolt	d±0.5
LS	51	22.4	M5	10
	64	28.0	M5	10
	76	31.5	M5	10
	90	31.5	M5	10
LA	64	28.0	M5	13
	76	31.5	M5	13
	90	31.5	M5	13
LB	76	31.5	M6	17
	90	31.5	M6	17

◆ Dimensions of mounting bracket

Leg shape	D	A±2	B±1	T±0.5	S±0.5	H±1	h±0.5
2 – Leg (Code:K1)	51	40.0	34.0	7.0	5.0	30	24
	64	46.5	40.5	7.0	5.0	30	24
	76	53.0	46.8	7.0	5.0	30	24
	90	60.3	54.0	7.0	5.0	35	20
3 – Leg (Code:K2)	51	36.5	31.8	7.0	5.0	30	24
	64	43.6	38.1	7.0	5.0	30	24
	76	50.2	44.5	7.0	5.0	30	24
	90	56.5	50.8	7.0	5.0	30	24

SA Series


- High ripple, suitable to use in industrial power supplies for inverter circuitry, etc



SPECIFICATIONS

Item	Performance Characteristics																				
Category Temperature Range	-40 ~ +85℃				-25 ~ +85℃																
Working Voltage Range	160 ~ 250Vdc				350 ~ 450Vdc																
Capacitance Range	2,700 ~ 68,000μF				1,000 ~ 18,000μF																
Capacitance Tolerance	±20% (at 25℃ and 120Hz)																				
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr><tr><td>tanδ(Max)</td><td>0.25</td><td>0.25</td><td>0.25</td><td>0.20</td><td>0.20</td><td>0.20</td></tr></table>							Rated Voltage (V)	160	200	250	350	400	450	tanδ(Max)	0.25	0.25	0.25	0.20	0.20	0.20
Rated Voltage (V)	160	200	250	350	400	450															
tanδ(Max)	0.25	0.25	0.25	0.20	0.20	0.20															
Leakage Current	I=0.01CV or 5000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes																				
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 85℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>							Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value								
Capacitance change	≒ ±20% of the initial value																				
Dissipation factor(tanδ)	≒ 200% of the specified value																				
Leakage current	≒ specified value																				
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 85℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>							Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value								
Capacitance change	≒ ±20% of the initial value																				
Dissipation factor(tanδ)	≒ 200% of the specified value																				
Leakage current	≒ specified value																				
Others	Conforms to JIS-C-5101-4 (1998), characteristic W																				

DIMENSIONS (mm)

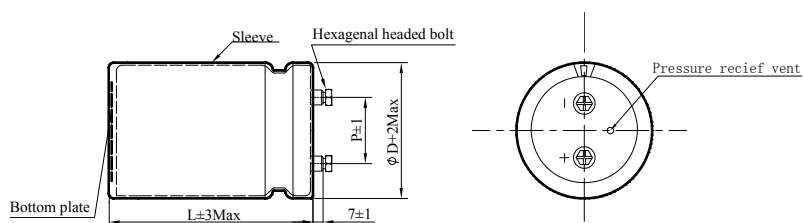

ΦD	51	64	76	90
P±1	22.4	28.0	31.5	31.5

PART NUMBER SYSTEM(Example : 400V 15000µF)

S A 2 G 1 5 3 M L S 9 0 N 0

Special Request

Size code (90N0 : 90×230)

Terminal code

Capacitance tolerance code (M:±20%)

Capacitance code(15000µF)

Voltage code(400V)

Series code (SA)

SA Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz / 85℃

Vdc ΦD uF	160								200							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
3300									51×80	4.5						
3900	51×80	5.1							51×80	5.3						
4700	51×80	5.6							51×100	7.1	64×80	6.8				
5600	51×100	6.4							51×120	8.2	64×80	7.9				
6800	51×100	7.5	64×80	7.2					51×120	9.2	64×100	8.9				
8200	51×120	8.4	64×100	8.1							64×100	10.0				
10000	51×120	11.1	64×100	9.8							64×120	11.0				
12000			64×100	10.8							64×140	11.5	76×100	11.1		
15000			64×120	12.7							64×160	12.8	76×120	12.4		
18000			64×150	14.0	76×100	13.6							76×140	13.5	90×110	13.0
22000			64×150	17.0	76×120	16.6							76×160	15.6	90×130	15.1
27000					76×150	18.1	90×120	17.6					76×190	17.6	90×150	17.1
33000					76×150	19.4	90×120	18.9					76×220	18.8	90×170	18.3
39000					76×190	20.8	90×150	20.3							90×200	19.6
47000					76×220	22.2	90×170	21.7								
68000							90×230	22.3								

Vdc ΦD uF	250								350							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1200									51×80	5.5						
1500									51×80	6.1						
1800									51×100	7.4						
2200									51×100	7.9	64×80	7.6				
2700	51×80	4.2							51×120	9.8	64×100	9.5				
3300	51×100	5.0							51×120	10.8	64×110	10.5				
3900	51×120	5.9	64×80	5.6							64×120	12.3	76×100	11.9		
4700	51×120	6.9	64×100	6.6							64×130	14.2	76×100	13.8		
5600			64×100	7.8							64×150	15.9	76×120	15.5	90×100	15.0
6800			64×120	8.7									76×150	18.0	90×100	17.5
8200			64×120	10.1	76×100	9.7							76×150	21.0	90×120	20.5
10000			64×150	11.1	76×110	11.7									90×150	25.3
12000			64×170	13.0	76×130	12.6									90×170	28.4
15000					76×150	14.9	90×120	14.4							90×190	34.6
18000					76×170	16.4	90×130	15.9							90×230	39.7
22000					76×200	17.9	90×160	17.4								
27000							90×180	19.3								
33000							90×220	21.2								

SA Series

Case size & Permissible rated ripple current (A rms) 120Hz / 85°C


Vdc ΦD uF	400								450							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1000	51×80	5.0							51×80	5.0						
1200	51×80	5.5							51×100	5.5	64×80	5.2				
1500	51×100	6.5	64×80	6.2					51×120	6.9	64×100	6.6				
1800	51×100	7.1	64×80	6.8					51×120	8.1	64×100	7.7				
2200	51×120	8.8	64×100	8.5							64×100	9.0				
2700			64×100	9.9							64×120	10.3	76×100	9.9		
3300			64×120	11.3	76×100	10.9					64×130	11.6	76×100	11.2		
3900			64×130	12.9	76×100	12.5					64×150	13.4	76×120	13.0	90×100	12.5
4700			64×150	14.5	76×120	14.1	90×100	13.6					76×130	15.0	90×100	14.5
5600					76×130	16.3	90×100	15.8					76×150	17.5	90×120	17.0
6800					76×150	19.2	90×120	18.7					76×170	21.9	90×150	21.4
8200					76×170	24.0	90×150	23.5					76×200	24.0	90×170	23.5
10000					76×200	26.4	90×170	25.9					76×230	28.8	90×190	28.3
12000					76×230	31.5	90×190	31.0							90×230	33.0
15000							90×230	36.5								

RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
160 ~ 450	0.82	1.00	1.20	1.35	1.40

DIMENSIONS (Screw-Mount) [mm]

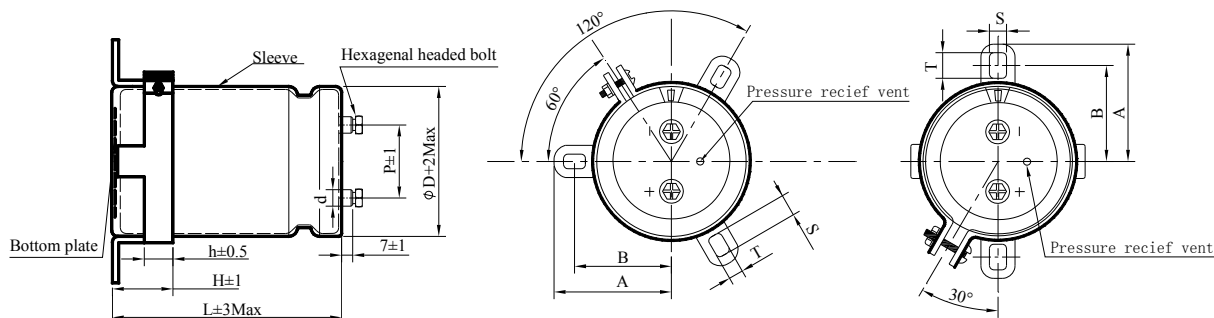

Terminal pitch and Nominal dia. of bolt

Terminal Code	ΦD	P±1	Nominal dia. of bolt	d±0.5
LS	51	22.4	M5	10
	64	28.0	M5	10
	76	31.5	M5	10
	90	31.5	M5	10
LA	64	28.0	M5	13
	76	31.5	M5	13
	90	31.5	M5	13
LB	76	31.5	M6	17
	90	31.5	M6	17

Dimensions of mounting bracket

Leg shape	D	A±2	B±1	T±0.5	S±0.5	H±1	h±0.5
2 – Leg (Code:K1)	51	40.0	34.0	7.0	5.0	30	24
	64	46.5	40.5	7.0	5.0	30	24
	76	53.0	46.8	7.0	5.0	30	24
	90	60.3	54.0	7.0	5.0	35	20
3 – Leg (Code:K2)	51	36.5	31.8	7.0	5.0	30	24
	64	43.6	38.1	7.0	5.0	30	24
	76	50.2	44.5	7.0	5.0	30	24
	90	56.5	50.8	7.0	5.0	30	24

ALUMINUM ELECTROLYTIC CAPACITORS



SL Series


- High ripple current, suitable to use in industrial power supplies for inverter circuitry, etc
- Load life 20,000 hours at 85°C



SPECIFICATIONS

Item	Performance Characteristics				
Category Temperature Range	-40 ~ +85℃			-25 ~ +85℃	
Working Voltage Range	200 ~ 250Vdc			350 ~ 400Vdc	
Capacitance Range	1,500 ~ 39,000μF			1,000 ~ 15,000μF	
Capacitance Tolerance	±20% (at 25℃ and 120Hz)				
Dissipation Factor (tanδ) (at 25℃, 120Hz)	Rated Voltage (V)	200	250	350	400
	tanδ(Max)	0.25	0.25	0.20	0.20
Leakage Current	I=0.01CV or 5000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes				
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 20,000 hours at 85℃				
	Capacitance change	≒ ±20% of the initial value			
	Dissipation factor(tanδ)	≒ 200% of the specified value			
	Leakage current	≒ specified value			
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 85℃ without voltage applied.				
	Capacitance change	≒ ±20% of the initial value			
	Dissipation factor(tanδ)	≒ 200% of the specified value			
	Leakage current	≒ specified value			
Others	Conforms to JIS-C-5101-4 (1998), characteristic W				


DIMENSIONS (mm)

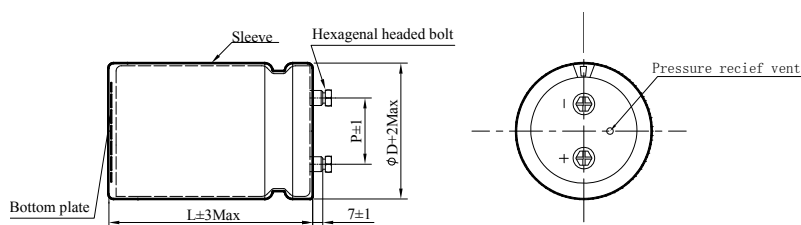

ΦD	51	64	76	90
P±1	22.4	28.0	31.5	31.5

PART NUMBER SYSTEM(Example : 350V 15000μF)

S L 2 V 1 5 3 M L S 9 0 N 0

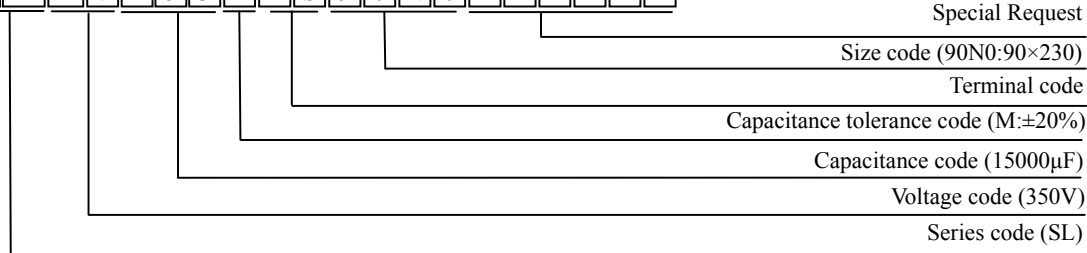

ALUMINUM ELECTROLYTIC CAPACITORS



SL Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz / 85°C

Vdc ΦD uF	200								250							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1500									51×80	2.4						
1800									51×100	2.8						
2200	51×80	2.9							51×100	3.2	64×80	3.0				
2700	51×100	3.4							51×120	3.7	64×80	3.6				
3300	51×100	3.9	64×80	3.7					51×120	4.4	64×100	4.3				
3900	51×120	4.6	64×100	4.4							64×100	5.0				
4700			64×100	5.1							64×120	5.9	76×100	5.6		
5600			64×120	6.1							64×120	6.6	76×100	6.4		
6800			64×120	7.2	76×100	7.0					64×150	7.3	76×120	7.1		
8200			64×120	7.9	76×100	7.6					64×150	8.9	76×120	8.6		
10000			64×150	8.5	76×120	8.2							76×150	10.0	90×120	9.6
12000					76×120	9.3	90×100	8.9					76×190	11.5	90×150	11.1
15000					76×150	10.4	90×120	9.9							90×170	12.7
18000					76×170	13.2	90×120	12.7							90×190	14.1
22000					76×190	15.7	90×150	15.1							90×230	15.4
27000					76×190	15.7	90×150	15.1								
33000							90×190	15.9								
39000							90×230	18.0								

Vdc ΦD uF	350								400							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1000	51×80	3.9							51×80	3.9						
1200	51×80	4.2							51×100	4.6	64×80	4.2				
1500	51×100	5.2							51×120	5.6	64×80	6.0				
1800	51×100	5.7	64×80	5.4					51×120	6.4	64×100	5.2				
2200	51×120	7.1	64×100	6.7							64×100	6.9				
2700			64×100	7.7							64×120	8.2	76×100	7.7		
3300			64×120	9.1							64×120	9.5	76×100	9.0		
3900			64×120	10.4	76×100	9.8					64×150	11.1	76×120	10.5	90×100	9.9
4700			64×150	12.2	76×120	11.5							76×120	12.0	90×100	11.4
5600					76×120	13.1	90×100	12.4					76×150	14.0	90×120	13.3
6800					76×150	15.5	90×120	14.7					76×190	17.3	90×150	16.5
8200					76×170	19.0	90×150	18.1							90×170	18.1
10000					76×190	20.9	90×150	19.9							90×190	21.7
12000							90×190	23.8							90×230	25.8
15000							90×230	28.8								

◆ RIPPLE CURRENT MULTIPLIERS


Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
200 ~ 400	0.70	1.00	1.10	1.30	1.40



SL Series

◆ DIMENSIONS (Screw-Mount) [mm]:

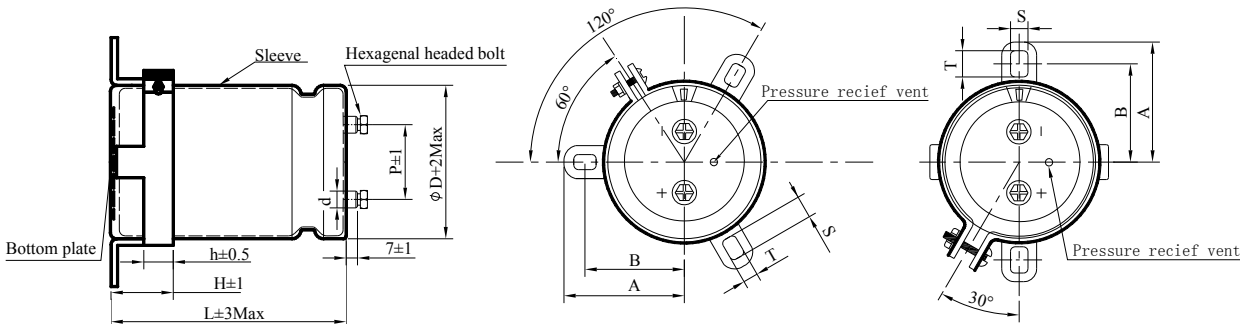

◆ Tterminal pitch and Nominal dia.of bolt

Terminal Code	ϕD	$P \pm 1$	Nominal dia.of bolt	$d \pm 0.5$
LS	51	22.4	M5	10
	64	28.0	M5	10
	76	31.5	M5	10
	90	31.5	M5	10
LA	64	28.0	M5	13
	76	31.5	M5	13
	90	31.5	M5	13
LB	76	31.5	M6	17
	90	31.5	M6	17

◆ Dimensions of mounting bracket

Leg shape	D	$A \pm 2$	$B \pm 1$	$T \pm 0.5$	$S \pm 0.5$	$H \pm 1$	$h \pm 0.5$
2 – Leg (Code:K1)	51	40.0	34.0	7.0	5.0	30	24
	64	46.5	40.5	7.0	5.0	30	24
	76	53.0	46.8	7.0	5.0	30	24
	90	60.3	54.0	7.0	5.0	35	20
3 – Leg (Code:K2)	51	36.5	31.8	7.0	5.0	30	24
	64	43.6	38.1	7.0	5.0	30	24
	76	50.2	44.5	7.0	5.0	30	24
	90	56.5	50.8	7.0	5.0	30	24

ALUMINUM ELECTROLYTIC CAPACITORS



SK Series


- High ripple, suitable to use in industrial power supplies for inverter circuitry, etc
- Load life 2,000 hours at 105°C



SPECIFICATIONS

Item	Performance Characteristics														
Category Temperature Range	-40 ~ +105℃			-25 ~ +105℃											
Working Voltage Range	200 ~ 250Vdc			350 ~ 400Vdc											
Capacitance Range	1,500 ~ 39,000μF			1,000 ~ 15,000μF											
Capacitance Tolerance	±20% (at 25℃ and 120Hz)														
Dissipation Factor (tanδ) (at 25℃, 120Hz)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>250</td><td>350</td><td>400</td></tr><tr><td>tanδ(Max)</td><td>0.25</td><td>0.25</td><td>0.20</td><td>0.20</td></tr></table>					Rated Voltage (V)	200	250	350	400	tanδ(Max)	0.25	0.25	0.20	0.20
Rated Voltage (V)	200	250	350	400											
tanδ(Max)	0.25	0.25	0.20	0.20											
Leakage Current	I=0.01CV or 5000μA, whichever is smaller I : Leakage current (μA) C : Rated capacitance (μF) V : Rated voltage (V) Impress the rated voltage for 5 minutes														
Endurance	The following specifications shall be satisfied when the capacitors are restored to 25℃ after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 105℃. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>					Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value				
Capacitance change	≒ ±20% of the initial value														
Dissipation factor(tanδ)	≒ 200% of the specified value														
Leakage current	≒ specified value														
Shelf Life	The following requirements shall be satisfied when the capacitor are restored to 25℃ after the rated voltage applied for 500 hours at 105℃ without voltage applied. <table><tr><td>Capacitance change</td><td>≒ ±20% of the initial value</td></tr><tr><td>Dissipation factor(tanδ)</td><td>≒ 200% of the specified value</td></tr><tr><td>Leakage current</td><td>≒ specified value</td></tr></table>					Capacitance change	≒ ±20% of the initial value	Dissipation factor(tanδ)	≒ 200% of the specified value	Leakage current	≒ specified value				
Capacitance change	≒ ±20% of the initial value														
Dissipation factor(tanδ)	≒ 200% of the specified value														
Leakage current	≒ specified value														
Others	Conforms to JIS-C-5101-4 (1998), characteristic W														

DIMENSIONS (mm)

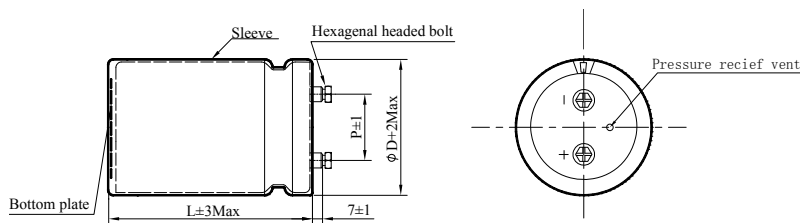

ΦD	51	64	76	90
P±1	22.4	28.0	31.5	31.5

PART NUMBER SYSTEM(Example : 350V 10000μF)

S	K	2	V	1	0	3	M	L	S	7	6	J	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Special Request

Size code (76J0 : 76×190)

Terminal code

Capacitance tolerance code (M:±20%)

Capacitance code (10000μF)

Voltage code (350V)

Series code (SK)

ALUMINUM ELECTROLYTIC CAPACITORS



SK Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz / 105°C

Vdc ΦD uF	200								250							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1500									51×80	2.4						
1800									51×100	2.8						
2200	51×80	2.9							51×100	3.2	64×80	3.0				
2700	51×100	3.4							51×120	3.7	64×80	3.6				
3300	51×100	3.9	64×80	3.7					51×120	4.4	64×100	4.3				
3900	51×120	4.6	64×100	4.4							64×100	5.0				
4700			64×100	5.1							64×120	5.9	76×100	5.6		
5600			64×120	6.1							64×120	6.6	76×100	6.4		
6800			64×120	7.2	76×100	7.0					64×150	7.3	76×120	7.1		
8200			64×120	7.9	76×100	7.6					64×150	8.9	76×120	8.6		
10000			64×150	8.5	76×120	8.2							76×150	10.0	90×120	9.6
12000					76×120	9.3	90×100	8.9					76×190	11.5	90×150	11.1
15000					76×150	10.4	90×120	9.9							90×170	12.7
18000					76×170	13.2	90×120	12.7							90×190	14.1
22000					76×190	15.7	90×150	15.1							90×230	15.4
27000					76×190	15.7	90×150	15.1								
33000							90×190	15.9								
39000							90×230	18.0								

Vdc ΦD uF	350								400							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1000	51×80	3.9							51×80	3.9						
1200	51×80	4.2							51×100	4.6	64×80	4.2				
1500	51×100	5.2							51×120	5.6	64×80	6.0				
1800	51×100	5.7	64×80	5.4					51×120	6.4	64×100	6.5				
2200	51×120	7.1	64×100	6.7							64×100	6.9				
2700			64×100	7.7							64×120	8.2	76×100	7.7		
3300			64×120	9.1							64×120	9.5	76×100	9.0		
3900			64×120	10.4	76×100	9.8					64×150	11.1	76×120	10.5	90×100	9.9
4700			64×150	12.2	76×120	11.5							76×120	12.0	90×100	11.4
5600					76×120	13.1	90×100	12.4					76×150	14.0	90×120	13.3
6800					76×150	15.5	90×120	14.7					76×190	17.3	90×150	16.5
8200					76×170	19.0	90×150	18.1							90×170	18.1
10000					76×190	20.9	90×150	19.9							90×190	21.7
12000							90×190	23.8							90×230	25.8
15000							90×230	28.8								


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
200 ~ 400	0.70	1.00	1.10	1.30	1.40

SK Series

◆ DIMENSIONS (Screw-Mount) [mm]

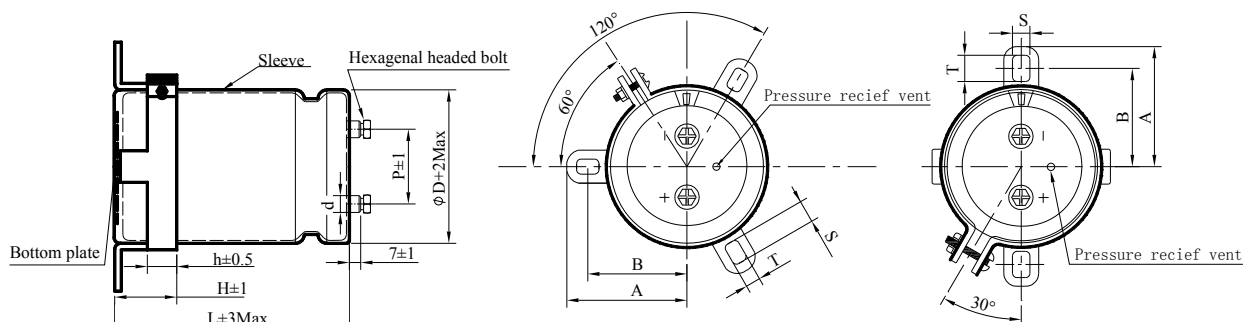

◆ Tterminal pitch and Nominal dia.of bolt


Terminal Code	ϕD	$P \pm 1$	Nominal dia.of bolt	$d \pm 0.5$
LS	51	22.4	M5	10
	64	28.0	M5	10
	76	31.5	M5	10
	90	31.5	M5	10
LA	64	28.0	M5	13
	76	31.5	M5	13
	90	31.5	M5	13
LB	76	31.5	M6	17
	90	31.5	M6	17

◆ Dimensions of mounting bracket

Leg shape	D	$A \pm 2$	$B \pm 1$	$T \pm 0.5$	$S \pm 0.5$	$H \pm 1$	$h \pm 0.5$
2 – Leg (Code:K1)	51	40.0	34.0	7.0	5.0	30	24
	64	46.5	40.5	7.0	5.0	30	24
	76	53.0	46.8	7.0	5.0	30	24
	90	60.3	54.0	7.0	5.0	35	20
	90	60.3	54.0	7.0	5.0	35	20
3 – Leg (Code:K2)	51	36.5	31.8	7.0	5.0	30	24
	64	43.6	38.1	7.0	5.0	30	24
	76	50.2	44.5	7.0	5.0	30	24
	90	56.5	50.8	7.0	5.0	30	24

- ## ◆ SPECIFICATIONS

◆ **DIMENSIONS (mm)**



S	X	2	E	3	3	2	M	L	S	5	1	A	0						
---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--



ALUMINUM ELECTROLYTIC CAPACITORS



SX Series

◆ Case size & Permissible rated ripple current (A rms) 120Hz/105℃

Vdc ΦD uF	200								250							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1500									51×80	2.4						
1800									51×100	2.8						
2200	51×80	2.9							51×100	3.2	64×80	3.0				
2700	51×100	3.4							51×120	3.7	64×80	3.6				
3300	51×100	3.9	64×80	3.7					51×120	4.4	64×100	4.3				
3900	51×120	4.6	64×100	4.4							64×100	5.0				
4700			64×100	5.1							64×120	5.9	76×100	5.6		
5600			64×120	6.1							64×120	6.6	76×100	6.4		
6800			64×120	7.2	76×100	7.0					64×150	7.3	76×120	7.1		
8200			64×120	7.9	76×100	7.6					64×150	8.9	76×120	8.6		
10000			64×150	8.5	76×120	8.2							76×150	10.0	90×120	9.6
12000					76×120	9.3	90×100	8.9					76×190	11.5	90×150	11.1
15000					76×150	10.4	90×120	9.9							90×170	12.7
18000					76×170	13.2	90×120	12.7							90×190	14.1
22000					76×190	15.7	90×150	15.1							90×230	15.4
27000					76×190	15.7	90×150	15.1								
33000							90×190	15.9								
39000							90×230	18.0								

Vdc ΦD uF	350								400							
	Φ51		Φ64		Φ76		Φ90		Φ51		Φ64		Φ76		Φ90	
	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC	ΦD×L	RC
1000	51×80	3.9							51×80	3.9						
1200	51×80	4.2							51×100	4.6	64×80	4.2				
1500	51×100	5.2							51×120	5.6	64×80	6.0				
1800	51×100	5.7	64×80	5.4					51×120	6.4	64×100	5.2				
2200	51×120	7.1	64×100	6.7							64×100	6.9				
2700			64×100	7.7							64×120	8.2	76×100	7.7		
3300			64×120	9.1							64×120	9.5	76×100	9.0		
3900			64×120	10.4	76×100	9.8					64×150	11.1	76×120	10.5	90×100	9.9
4700			64×150	12.2	76×120	11.5							76×120	12.0	90×100	11.4
5600					76×120	13.1	90×100	12.4					76×150	14.0	90×120	13.3
6800					76×150	15.5	90×120	14.7					76×190	17.3	90×150	16.5
8200					76×170	19.0	90×150	18.1							90×170	18.1
10000					76×190	20.9	90×150	19.9							90×190	21.7
12000							90×190	23.8							90×230	25.8
15000							90×230	28.8								


◆ RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Vdc	Frequency (Hz)				
	60	120	360	1K	10K
200 ~ 400	0.70	1.00	1.10	1.30	1.40

SX Series

◆ DIMENSIONS (Screw-Mount) [mm]

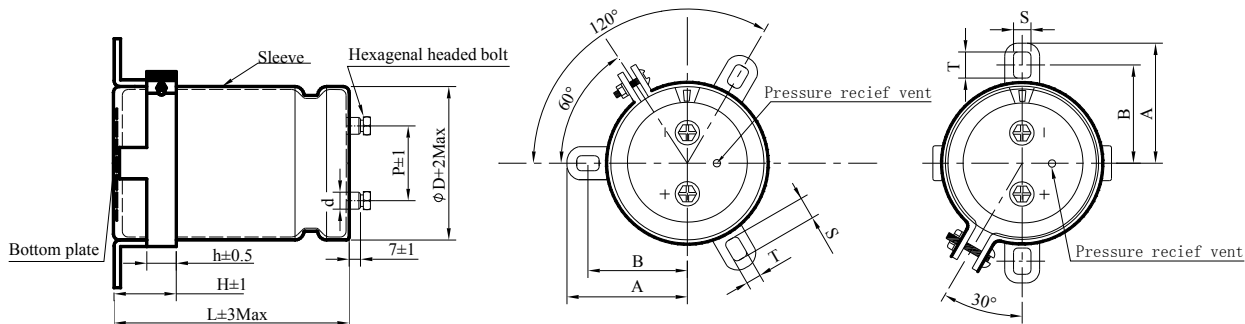

◆ Tterminal pitch and Nominal dia.of bolt

Terminal Code	φD	P±1	Nominal dia.of bolt	d±0.5
LS	51	22.4	M5	10
	64	28.0	M5	10
	76	31.5	M5	10
	90	31.5	M5	10
LA	64	28.0	M5	13
	76	31.5	M5	13
	90	31.5	M5	13
LB	76	31.5	M6	17
	90	31.5	M6	17

◆ Dimensions of mounting bracket

Leg shape	D	A±2	B±1	T±0.5	S±0.5	H±1	h±0.5
2 – Leg (Code:K1)	51	40.0	34.0	7.0	5.0	30	24
	64	46.5	40.5	7.0	5.0	30	24
	76	53.0	46.8	7.0	5.0	30	24
	90	60.3	54.0	7.0	5.0	35	20
3 – Leg (Code:K2)	51	36.5	31.8	7.0	5.0	30	24
	64	43.6	38.1	7.0	5.0	30	24
	76	50.2	44.5	7.0	5.0	30	24
	90	56.5	50.8	7.0	5.0	30	24