

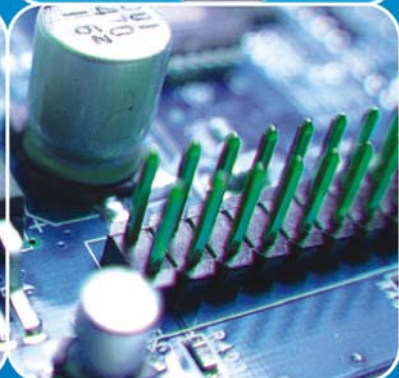


Recommended Products

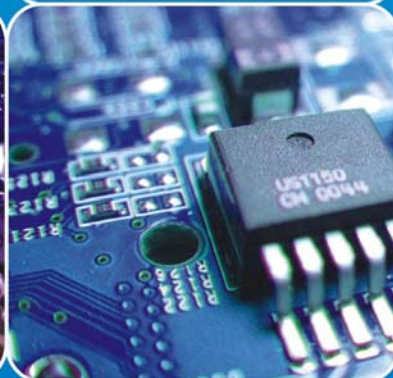

ALUMINUM ELECTROLYTIC CAPACITOR RECOMMEND

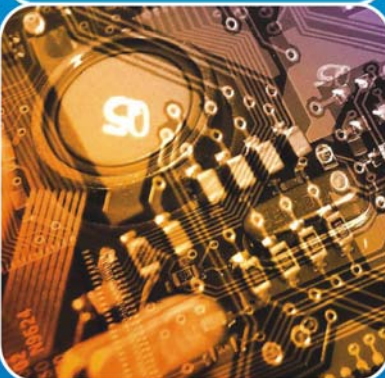

Low Impedance Long Life

ED Series

- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 2000~5000Hrs
- Working Voltage: 6.3~100V
- Capacitance Range: 10 ~ 10000µF



Extremely Low ESR

EB Series

- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 1000~2000Hrs
- Working Voltage: 6.3~16V
- Capacitance Range: 82 ~ 3300µF



Low Impedance

EL Series

- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 6.3~50V
- Capacitance Range: 56 ~ 6800µF



ES Series

Standard Products

105°C 2000Hrs

Long Life

EJ Series

- Category Temperature Range: -55 ~ 105°C
- Endurance Life: 105°C 5000Hrs
- Working Voltage: 6.3~63V
- Capacitance Range: 10 ~ 10000µF



Long Life

EG/EV Series

- Category Temperature Range: -55 ~ 105°C
- Endurance Life: 105°C 3000~6000Hrs
- Working Voltage: 6.3~63V
- Capacitance Range: 10 ~ 10000µF



Longer Life

EY Series

- Category Temperature Range: -55 ~ 105°C
- Endurance Life: 105°C 4000~10000Hrs
- Working Voltage: 6.3~100V
- Capacitance Range: 6.8 ~ 18000µF



EH Series

- 9mm Height (10~12.5Φ)
- Category Temperature Range: -55 ~ 105°C
- Endurance Life: 105°C 3000~4000Hrs
- Working Voltage: 10~35V
- Capacitance Range: 150 ~ 820µF



ER Series

- 7 & 9 mm Height (8Φ)
- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 3000Hrs
- Working Voltage: 6.3~35V
- Capacitance Range: 33 ~ 470µF



Standard Products

EM Series

- 7 & 9 mm Height (8Φ)
- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 1000~2000Hrs
- Working Voltage: 6.3~35V
- Capacitance Range: 33 ~ 470µF



Small Size

EP Series

- 12 mm Height (12.5Φ)
- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 4000Hrs
- Working Voltage: 10~100V
- Capacitance Range: 68 ~ 1800µF



Small Size

EC Series

- 12 mm Height (12.5Φ)
- Category Temperature Range: -40 ~ 105°C
- Endurance Life: 105°C 5000Hrs
- Working Voltage: 10~100V
- Capacitance Range: 68 ~ 1800µF



Small, Long Life

KJ Series

- Suitable For LED Lighting, Long Life, High Reliability Application
- Small Size, Long Life
- Endurance Life: 105°C 10000~12000Hrs
- Working Voltage: 160 ~450V



Suitable For Power Input, Home Appliance, Entertainment Electric Products

High Ripple Current, Long Life

PJ Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 8000~10000Hrs
- Working Voltage: 160 ~450V
- Capacitance Range: 6.8 ~ 330μF



High Ripple Current, Long Life

PV Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 2000~5000Hrs
- Working Voltage: 200 ~450V
- Capacitance Range: 6.8 ~ 470μF



Standard Products

PW Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 200 ~500V
- Capacitance Range: 10 ~ 470μF



Suitable For Adaptor, Charger Products

Long Life, Low DF

DJ Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 8000~10000Hrs
- Working Voltage: 200 ~450V
- Capacitance Range: 6.3~330μF
- Comply With EMI Test

DF ≤ 5%



Long Life, Low DF

DV Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 5000Hrs
- Working Voltage: 200 ~450V
- Capacitance Range: 6.8~470μF
- Comply With EMI Test

DF ≤ 5%



Small Size, Low DF

DW Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 200 ~450V
- Capacitance Range: 68~470μF
- Comply With EMI Test

DF ≤ 5%



Slim Type Save Space

PZ Series

Standard Slim Size Products;
 Suitable for horizontal mounting for low profile application;
 Suitable Slim Power Supply;
 ■ Endurance Life:105°C 2000Hrs
 ■ Working Voltage:200 ~450V



Small Size, Low DF

DZ Series

DF ≤ 5%

Small Size, Low DF Products;
 ■ Endurance Life:105°C 2000Hrs
 ■ Working Voltage:200 ~450V
 ■ Capacitance Range:18~270μF
 ■ Comply With EMI Test



Slim Type, Long Life

PA Series

Small Size, Long Life, Suitable for Slim TV ,LCD Products
 ■ Endurance Life:105°C 5000Hrs
 ■ Working Voltage:400 ~450V
 ■ Capacitance Range:33~120μF



Small Size, Long Life, Suitable For Lighting Ballast

Long Life, Low DF

DA Series

DF ≤ 5%

■ Category Temperature Range:
 -25 ~ 105°C
 ■ Endurance Life:105°C 5000Hrs
 ■ Working Voltage:400 ~450V
 ■ Capacitance Range:33~120μF
 ■ Comply With EMI Test



Slim Type, Long Life

PQ Series

Small Size, Long Life, Multi Size ,
 Suitable for Slim TV ,LCD Products
 ■ Endurance Life:105°C 10000小时
 ■ Working Voltage:200 ~450V
 ■ Capacitance Range:33~220μF



Long Life, Low DF

DQ Series

DF ≤ 5%

■ Category Temperature Range:
 -25 ~ 105°C
 ■ Endurance Life:105°C 10000小时
 ■ Working Voltage:200 ~450V
 ■ Capacitance Range:33~220μF
 ■ Comply With EMI Test



130°C High Temperature



125°C High Temperature, Long Life

TL Series

Suitable for High Temperature Application Controller such as electric power steering system, direct injection engine

- Endurance Life: 125°C 3000~5000Hrs
- Working Voltage: 10 ~50V
- Capacitance Range: 22~1000μF



125°C High Temperature

PY Series

Suitable for lighting equipment and car electric equipment

- Endurance Life: 125°C 2000Hrs
- Working Voltage: 10 ~450V
- Capacitance Range: 4.7~1000μF



Safety Countermeasure Products

Suitable For Adaptor, Charger, TV Products

SW Series

- Category Temperature Range: -25~105°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 22~680μF



SQ Series

- Category Temperature Range: -25~105°C
- Endurance Life: 105°C 5000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 22~680μF



SP Series

- Category Temperature Range: -25~105°C
- Endurance Life: 105°C 10000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 22~680μF



Capacitor For Over Voltage Application

Prevent Spark During Over Voltage Application

VW Series

- Category Temperature Range: -25~105°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 22~680μF



VQ Series

- Category Temperature Range: -25~105°C
- Endurance Life: 105°C 5000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 22~680μF



VJ Series

- Category Temperature Range: -25~105°C
- Endurance Life: 105°C 10000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 22~680μF



Suitable for TV/Switch Power Supply

85°C Suitable for horizontal mounting

GD Series


- Category Temperature Range: -25 ~ 85°C
- Endurance Life: 85°C 2000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 82 ~1200µF



105°C Suitable for horizontal mounting

PX Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 68 ~1500µF



Standard Products

GM Series

- Category Temperature Range: -25 ~ 85°C
- Endurance Life: 85°C 2000Hrs
- Working Voltage: 160~500V
- Capacitance Range: 56 ~2700µF



Customized Products

Multi Terminal Design
Customized Products



105°C Standard Products

PL Series

- Category Temperature Range: -25 ~ 85°C
- Endurance Life: 105°C 2000Hrs
- Working Voltage: 160~500V
- Capacitance Range: 47 ~2200µF



Suitable For Home Appliance, UPS, Switch Power Supply

Small Size, Long Life

GS Series

- Category Temperature Range: -25 ~ 85°C
- Endurance Life: 85°C 3000Hrs
- Working Voltage: 200~450V
- Capacitance Range: 68 ~2200µF



Small Size, Long Life

GV Series

- Category Temperature Range: -25 ~ 85°C
- Endurance Life: 85°C 5000Hrs
- Working Voltage: 200~500V
- Capacitance Range: 56 ~2200µF



Suitable For Air Conditioner, UPS, Switch Power Supply

105°C Long Life

PK/PD Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 3000Hrs
- Working Voltage: 200~450V
- Capacitance Range: 56 ~1800µF



105°C Long Life

PT/PG Series

- Category Temperature Range: -25 ~ 105°C
- Endurance Life: 105°C 4000~5000Hrs
- Working Voltage: 200~450V
- Capacitance Range: 68 ~1800µF



Lug Type

Suitable For Power Input Application

Lug Type

AQ Series

- Category Temperature Range: -25 ~ 85°C
- Endurance Life: 85°C 3000Hrs
- Working Voltage: 400~450V
- Capacitance Range: 330 ~820μF



Lug Type

AN Series

- Category Temperature Range: -25 ~ 85°C
- Endurance Life 85°C 3000Hrs
- Working Voltage: 400~450V
- Capacitance Range: 800 ~3300 μF



Suitable For Server Power Supply With High Frequency Switch On/Off

Long Life, High Ripple Current

PO Series

- Endurance Life: 105°C 2000Hrs
- Working Voltage: 400~450V
- Capacitance Range:68 ~680μF



Long Life, High Ripple Current

PI Series

- Endurance Life:105°C 3000Hrs
- Working Voltage: 400~450V
- Capacitance Range: 56 ~680μF



Screw Type

Suitable For Inverter Application

85°C Long Life

SA Series

High Ripple Current, Long Life

- Endurance Life: 85°C 5000Hrs
- Working Voltage: 160~450V
- Capacitance Range: 1000 ~ 68000μF



85°C Long Life

SL Series

High Ripple Current, Long Life

- Endurance Life: 85°C 20000Hrs
- Working Voltage: 200~400V
- Capacitance Range: 1000 ~ 39000μF



85°C Standard Products

SC Series

High Ripple Current

- Endurance Life: 85°C 2000Hrs
- Working Voltage: 200~450V
- Capacitance Range: 82 ~ 33000μF



105°C Standard Products

SK Series

- Endurance Life: 105°C 2000Hrs
- Working Voltage: 200~400V
- Capacitance Range: 1000 ~ 39000μF



High Temperature, Long Life

SX Series

Suitable for Switch Power Supply and Inverter

- Endurance Life: 105°C 5000Hrs
- Working Voltage: 200~400V
- Capacitance Range: 1000 ~ 39000μF

